

Key Features

- High optical transparency
- Low specular reflection
- Index matched to air, glass and adhesives
- Highly durable coating
- Wide range of sheet resistance

Applications

- Avionics displays
- Ruggedized displays
- Industrial displays
- Test & measurement equipment
- Handheld instruments

MAC Thin Films index matched ITO coatings offer superior EMI/RFI shielding and unsurpassed optical transmission for use on a wide variety of display applications.

We offer a wide range of ITO coatings ranging from <1000 ohms/sq. to ≤ 0.25 ohms.sq. All designs can be index matched to suit your specific design needs. Used in conjunction with our HEA[®] or LCD heater coatings, these filters can be customized with a variety of substrates to achieve outstanding electro-optical performance at a competitive price.

Our complete production facility can support your optical filter requirements through the design, proto-type phase with fabrication, bus bar and screen print applications, then scale for your production demands

ITO Coatings for EMI / RFI Shielding

Environmentally Tested Per
MIL-C-675C & MIL-C-14806A

- 24 hour humidity
- Adhesion: Snap tape
- Abrasion: 20 eraser rub
- Salt solubility
- Temperature resistance

Product Configurations

Substrates:

Clear soda lime float glass
Corning Eagle XG
Schott Boro33™


Thickness ranges :

0.7mm to 6mm

Tolerancing:

L x W: (0.7-1.9mm) +/-0.38mm

L x W: (2.3-5mm) +/-0.5mm

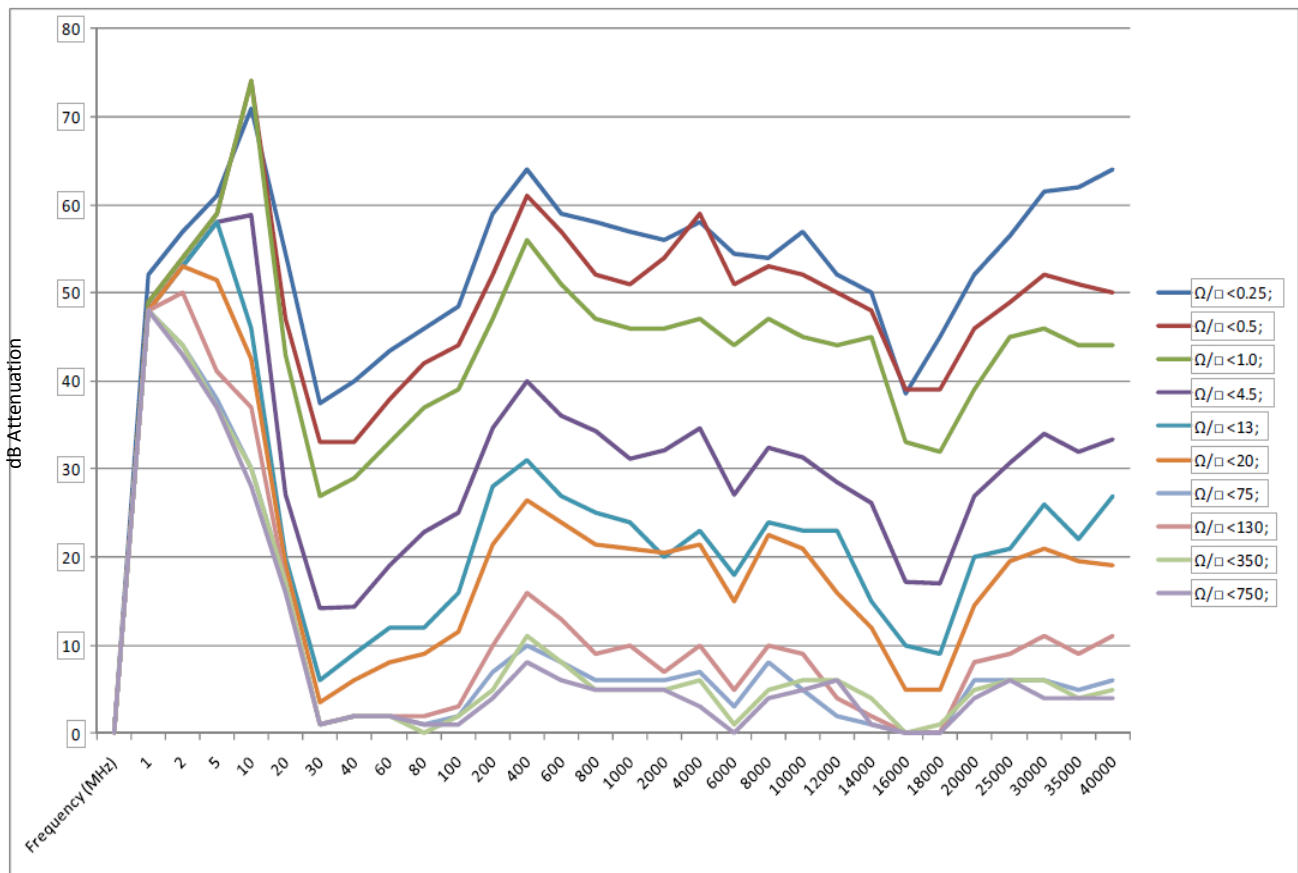

EMI testing was completed using the IEEE STD 299 Standard Test Method for Electromagnetic Shielding Effectiveness of Shielding Enclosures.

For ordering or additional product information, please contact us.
www.macthinfilms.com

2721 Giffen Avenue, Santa Rosa CA 95407 • P +1-707-791-1650 F +1-707-791-1701

Copyright © 2014-2015 MAC Thin Films. Product specifications and descriptions in this document are subject to change without notice.