



TRANSCEND SPECIFICATIONS


SHAPES




Parquet




Diamond




Picket

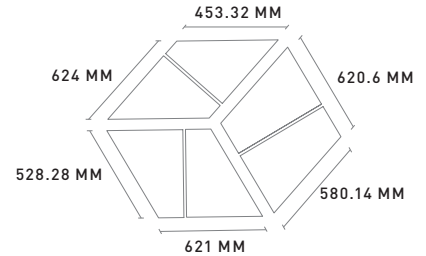


Trapezoid



Polygon

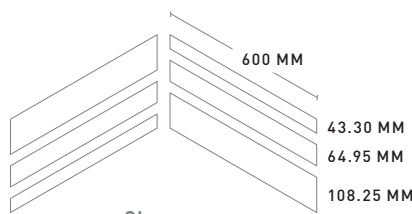

Chevron



Asymmetric

CATEGORY	Dry Back Vinyl	RESISTANCE TO LIGHT ASTM F1515-15	Pass
TOTAL THICKNESS	5/64" (2.5 mm) • 1/8" (3.0 mm)	RESISTANCE TO HEAT ASTM F1514-03	Pass
TOP WEAR LAYER	0.5 mm (20 mils) • 0.7 mm (30 mils)	IMPACT INSULATION CLASS IIC ASTM D492/ASTM 989	IIC: 59 dB
WIDTH(S) / LENGTH(S)	See Shapes Chart	INCREASE IN IMPACT INSULATION CLASS ASTM E2179	Δ IIC: 7.0
EDGE DETAIL	Micro-Bevel	SOUND TRANSMISSION CLASS ASTM E90 / ASTM E413	STC: 61 dB
EASE OF INSTALLATION	Moderate	THERMAL CONDUCTIVITY ASTM C518	0.121 W/m•K
RECOMMENDED ADHESIVE	BOND™ Adhesive	SMOKE DENSITY ASTM E662	Less than 450
INSTALLATION METHOD	Glue	RADIANT PANEL ASTM E648	Class 1
INSTALLS OVER RADIANT HEAT	Suitable for heated floors, follow installation instructions. Floor temperature not to exceed 85° F (30° C)	SMOKE AND FLAME SPREAD	Compliant with CAN / ULC S102.2
NO. OF COLOURS	Visit divinefloor.com for colour & texture availability	COMMERCIAL WARRANTY	15 Year Medium - 0.5 mm (20 mils) wear layer 25 Year Heavy - 0.7 mm (30 mils) wear layer
100% WATERPROOF	Yes	FUNGI RESISTANCE ASTM G21-15	0, No Growth
DIMENSIONAL STABILITY ASTM F2199-09(2014)	less than 0.15%	INDOOR AIR QUALITY	Floorscore® Certified
RESIDUAL INDENTATION ASTM F1914-07(2011)	Pass	HEAVY METAL DETECTION ASTM F963-16	Not Detected
RESISTANCE TO CHEMICALS ASTM F925-13	Pass	PHthalate Content CPSC-CH-C1001-09.3 ND	Not Detected
RESISTANCE TO LIGHT ASTM F1515-15	Pass		

