



Carmen by Luz Negra

Our PROFESSIONAL led profile series for surface/hanging applications is manufactured in high purity aluminium, with 8 different colours to choose from.

Its inner tray (where we can find the led and power supply) can be removed from the front which means easy maintenance.

This profile can be combined with microprism covers both in transparent and frosted ("easy-ON" system), which improve glare and UGR levels. Both profile and covers are available in lengths of 6m, allowing us to carry out long installations without joints.

We offer a 10 year guarantee on the profiles and 4 year guarantee on the covers.

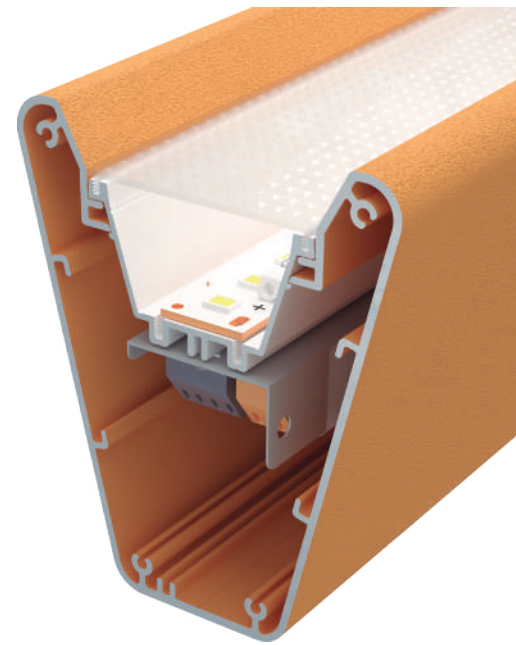

Aluminium profile

- LED-17.044 azure blue lacquered (ral 5009)
- LED-17.045 white lacquered (ral 9003)
- LED-17.046 black lacquered (ral 9005)
- LED-17.047 Patina green lacquered (ral 6000)
- LED-17.048 stone grey lacquered (ral 7030)
- LED-17.049 Pastel yellow lacquered (ral 1034)
- LED-17.050 tomato red lacquered (ral 3013)
- LED-17.051 ivory lacquered (ral 1014)



Aluminum end cap

- LED-19.396 azure blue lacquered (ral 5009)
- LED-19.399 Patina green lacquered (ral 6000)
- LED-19.398 black lacquered (ral 9005)
- LED-19.397 white lacquered (ral 9003)
- LED-19.400 stone grey lacquered (ral 7030)
- LED-19.401 Pastel yellow lacquered (ral 1034)
- LED-19.402 tomato red lacquered (ral 3013)
- LED-19.403 ivory lacquered (ral 1014)



"easy-ON" polycarbonate cover

- LED-18.074 frosted
- LED-18.075 transparent microprism
- LED-18.076 frosted microprism



Hanging kit

- LED-21.001 chrome Set of 2 units
- LED-21.002 white set of 2 units
- LED-21.003 black set of 2 units




Aluminium tray

- LED-14.007 lacquered white
- LED-14.042 lacquered black




Safety cable

- LED-22.039 steel 18cm

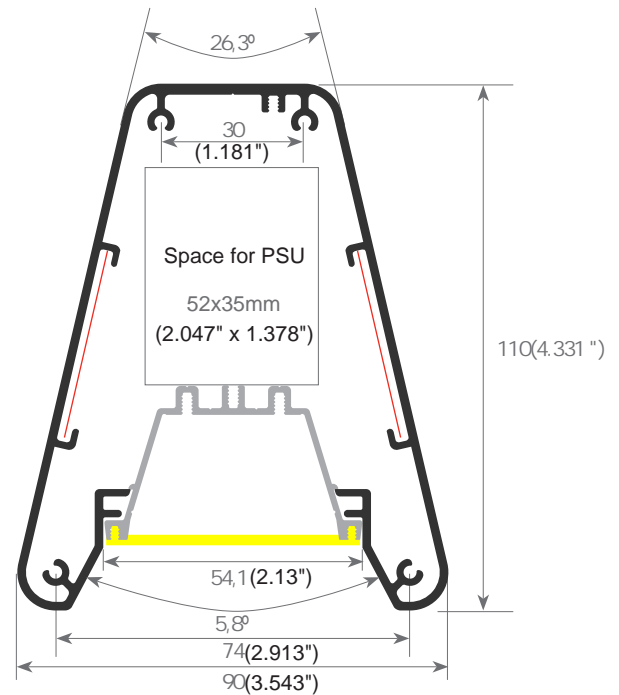

Ral colours

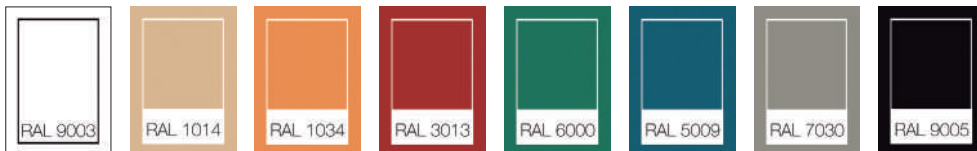

DISTRIBUTED BY


Wired 4 Signs USA +1 (865) 339 4956
 info@w4susa.com 669 Clinton Highway, Powell,
 Tennessee, 37849




Aluminium alloy extrusion process in accordance with: ISO 9001:2015 / Tolerances: UNE-EN 755-9 / Theoretical weight: 1.320 kg / Alloy: 6063 / Perimeter: 603 mm / Purity aluminium: 98.5% / Treatment: T-5



Surface mounted

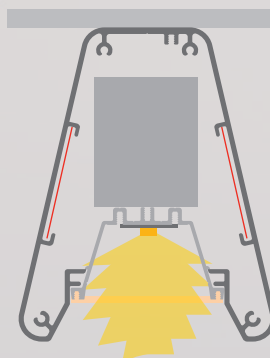

Hanging

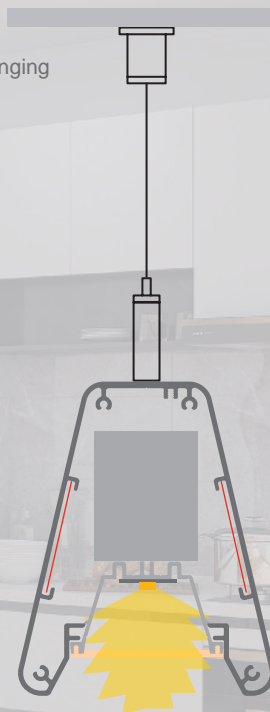

90° angle bracket
LED-22.040 aluminium set of 2 units



Flat bracket
LED-22.057 aluminium set of 2 units



Joining plate
LED-22.041 aluminium set of 2 units

DISTRIBUTED BY

Wired 4 Signs USA +1 (865) 339 4956
info@w4susa.com 669 Clinton Highway, Powell,
Tennessee, 37849



Aluminium alloy extrusion process in accordance with: ISO 9001:2015 / Tolerances: UNE-EN 755-9 / Theoretical weight: 1.320 kg
/ Alloy: 6063 / Perimeter: 603 mm / Purity aluminium: 98.5% / Treatment: T-5