

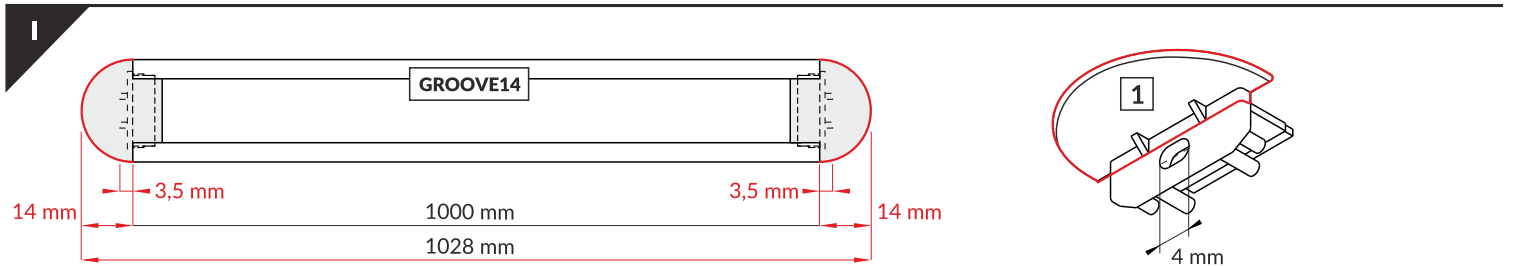
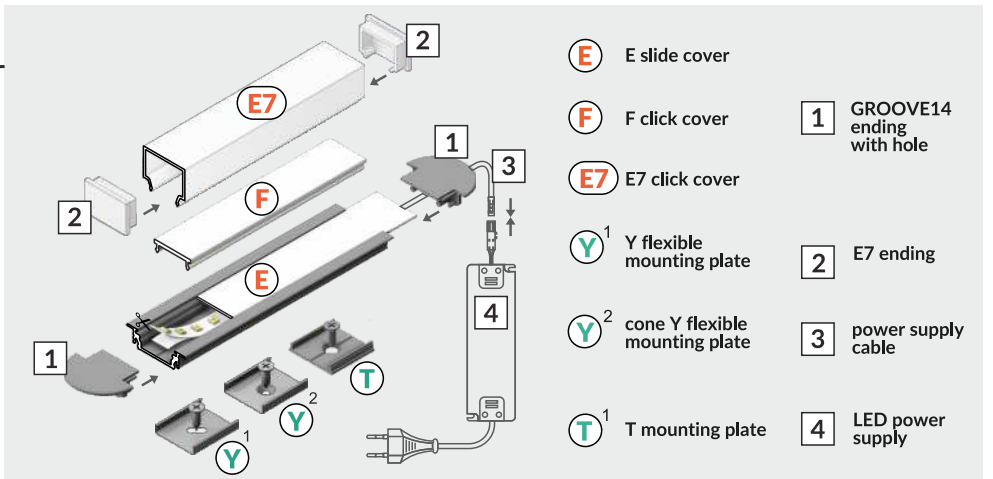
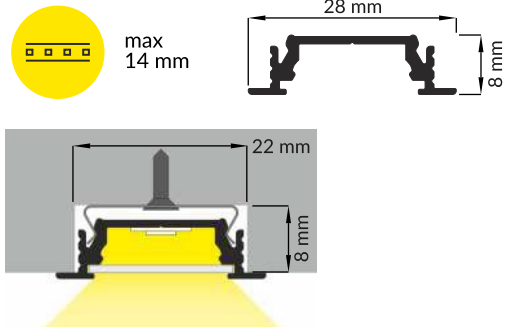
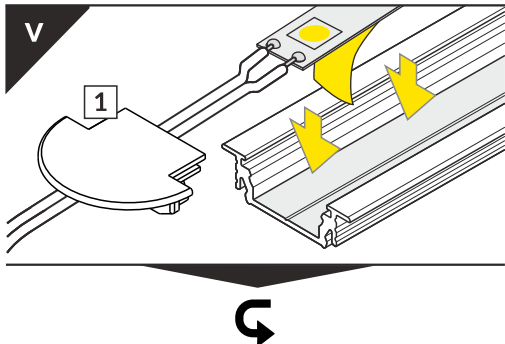
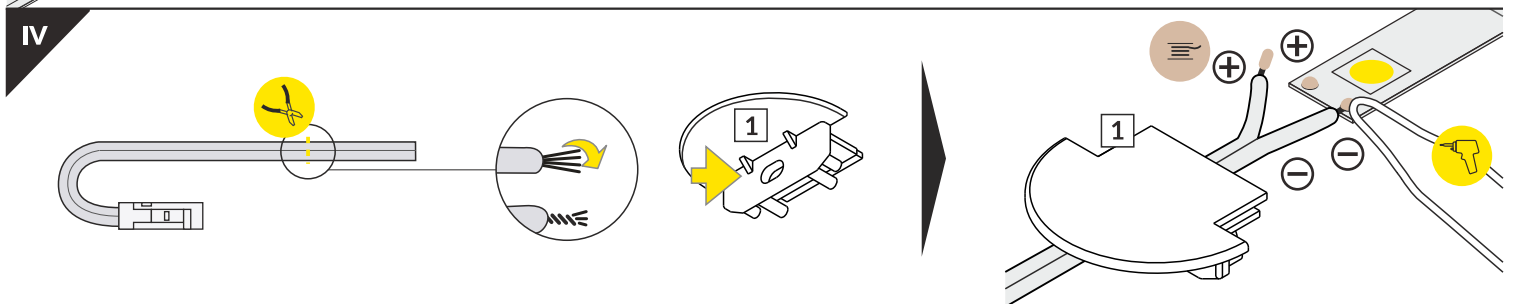


GROOVE14 EF/TY

RECESSED PROFILE

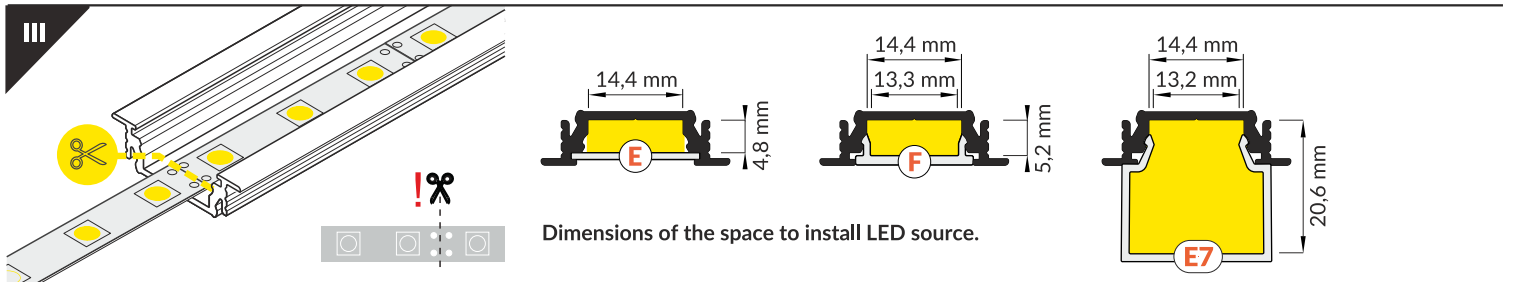


Note! Ending thickness increases the length of the luminaire (+ 2 x 14 mm) and the length of the mounting space (+ 2 x 3.5 mm).

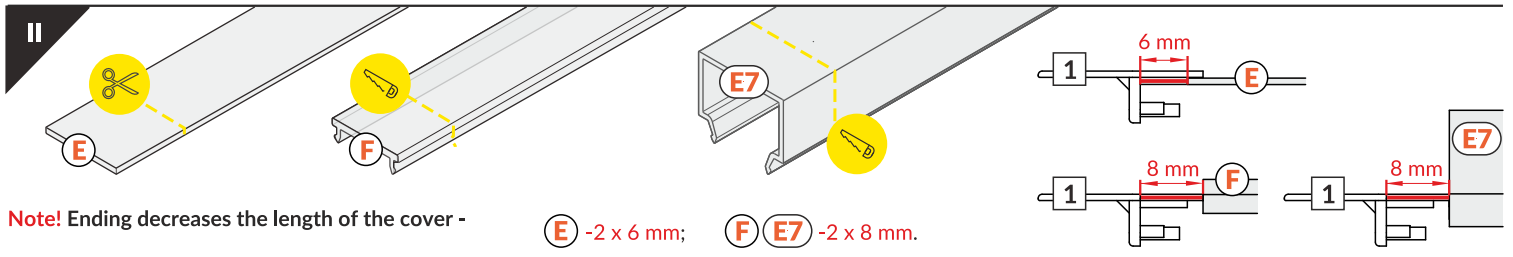

Wired 4 Signs USA +1 (865) 339 4956
 info@w4susa.com www.w4susa.com
 7669 Clinton Highway, Powell,
 Tennessee, 37849


VI

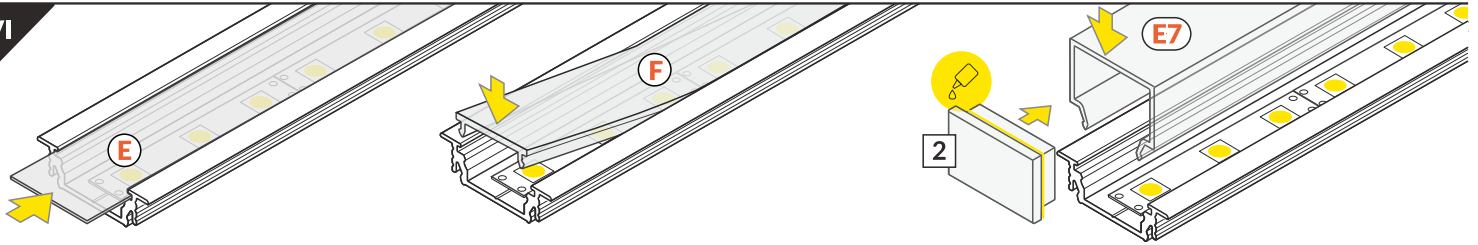


E slide cover

F click cover

E7 click cover + E7 ending

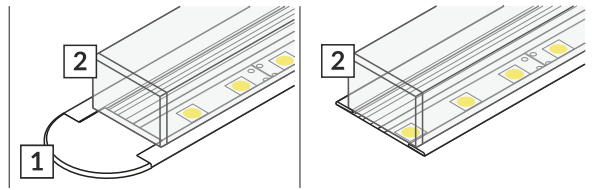

VII MOUNTING / MONTÁŽ

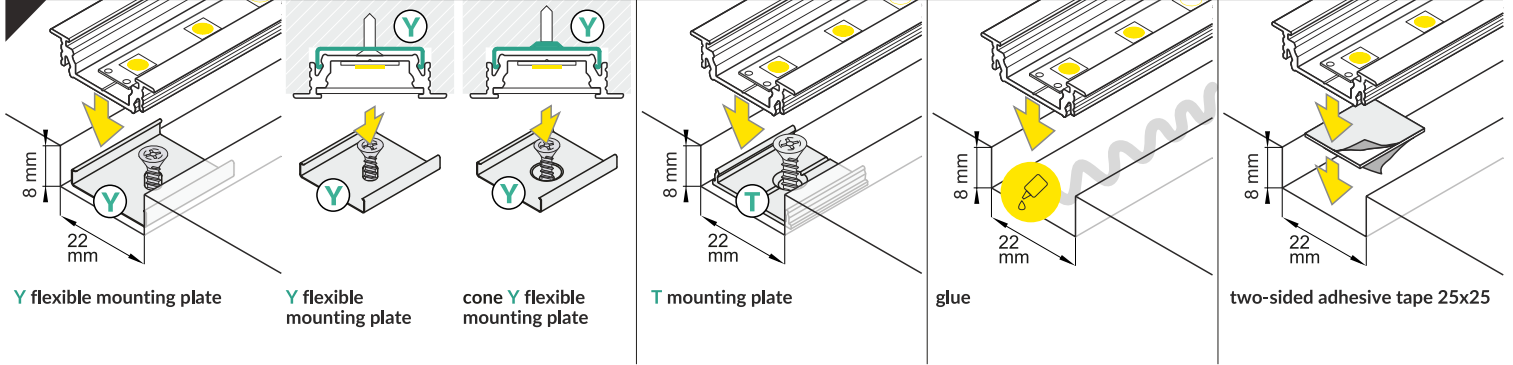

Y flexible mounting plate

Y flexible mounting plate


cone Y flexible mounting plate

T mounting plate

glue

two-sided adhesive tape 25x25


VIII CONNECTORS

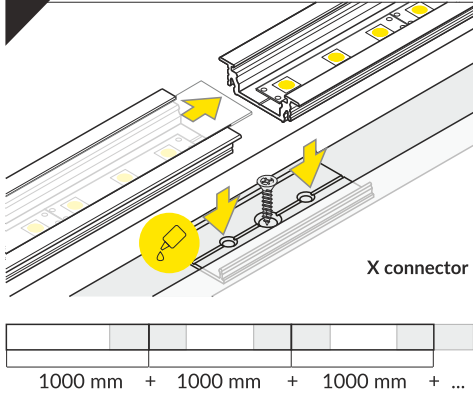



X connector

1000 mm + 1000 mm + 1000 mm + ...


Note! X connector may be used to make extra long profiles by connecting multiple profiles.

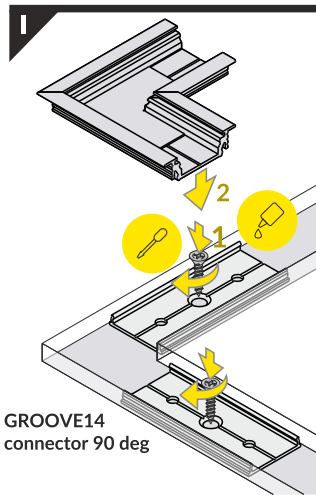

GROOVE14 connector 90 deg

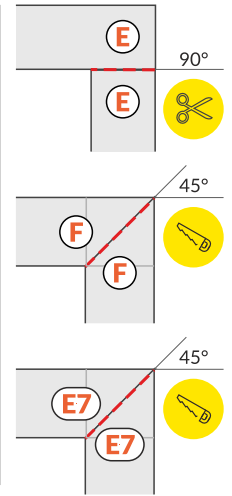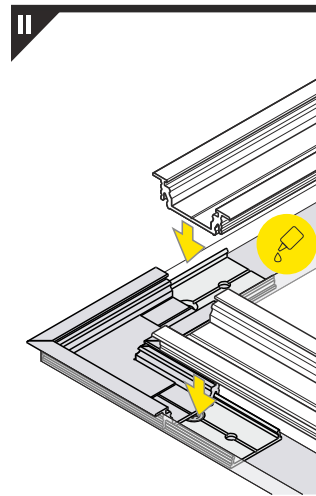

IX

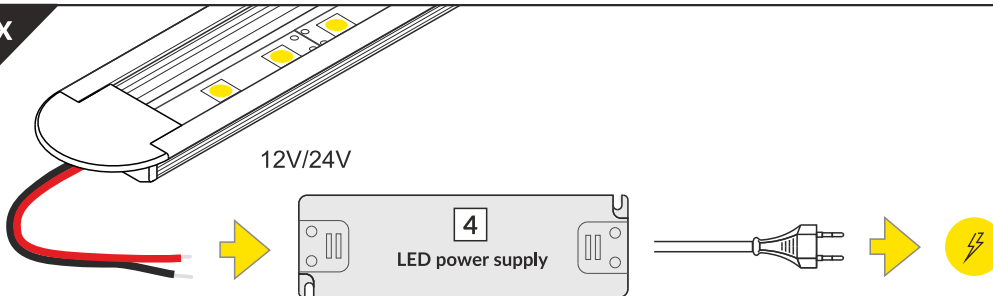

12V/24V

LED power supply

ACCESSORIES

- power switches
- controller + remote
- movement sensors



Wired 4 Signs USA +1 (865) 339 4956
 info@w4susa.com www.w4susa.com
 7669 Clinton Highway, Powell,
 Tennessee, 37849