
## HANNOVER by Luz Negra

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and silver anodised. This profile can be used for many di erent purposes, such as ceilings and signage, due to its ultra thin methacrylate with optical e ect.


Its etched methacrylate surface makes it ideal for hanging (display signs). We can also manufacture hanging or wall-based luminaires, both with Up&Down or side lighting. Its use with glass or methacrylate converts it into a practical illuminated shelf.

Suitable for led strips with a maximum width of 11mm and a power not greater than 30W/m. We recommend using it with COB our strip in order to obtain intense brightness.

We o er a 10 year guarantee.

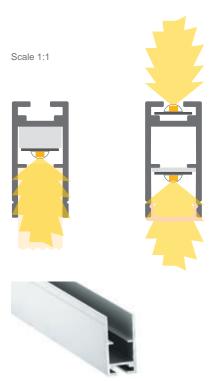

Aluminium profile
LED-12.001 anodised Silver 3m
LED-12.002 anodised silver 6m



Endcaps
LED-19.146 silver aluminium with hole
LED-19.147 plastic without hole

90° angle bracket LED-22.003 steel



 Polycarbonate cover

 LED-18.146
 frosted
 2m

 LED-18.148
 opal
 2m

 LED-18.152
 transparent
 2m

 LED-18.145
 frosted
 6m

 LED-18.147
 opal
 6m

 LED-18.151
 transparent
 6m



Methacrylate cover		
LED-18.014 transparent		2m
LED-18.015	frosted	2m
LED-18.116	opal	2m
LED-18.016	transparent	6m
LED-18.017	frosted	6m
LED-18.115	opal	6m



Bracket LED-22.022 aluminium








Hanger cable set of 2 units LED-HK21.001 silver LED-HK21.002 white LED-HK21.003 black (clip not included)

Shelf illumination with optic methacrylate and led





Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2 Theoretical weight: 0.357kg / Alloy: 6063 / Perimeter: 173mm / Anodising minimum: 15 microns

Aluminium purity: 95-98% / Material treatment: T-5

www.luznegra.net www.ledprofile.es



\* Parameters tolerance +/- 7%