


led profile

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised. The profile is suitable for corridors and walls, where it offers Up&Down led lighting. Suitable for led strips with a maximum width of 12mm and a power not greater than 20W/m.

KENTUCKY



Aluminium profile
09.005 anodised silver 3m




Aluminium endcaps
19.141 without hole



Polycarbonate cover
18.063 opal 3m



Clip
20.024 chrome steel

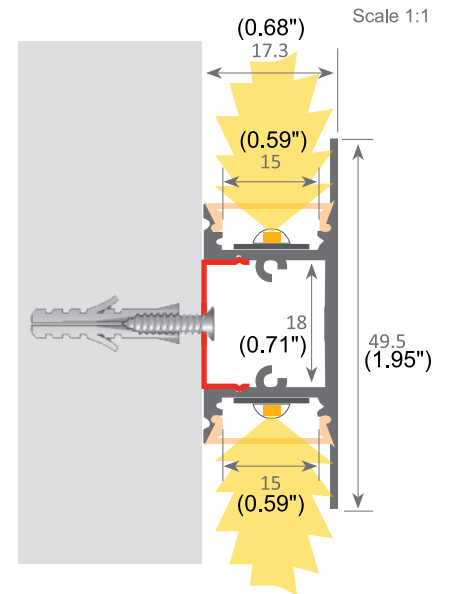

Option: aluminium skirting board



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.320kg / Alloy: 6063 / Perimeter: 135.5mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof VØ