



## HIBISCUS SERIES

### LEDRGBWW24v-19.2 IP20

#### Key Features

- Top-quality components,
- 4-chip LED 5050 RGBW,
- thick FPC,
- 60 LEDs per meter,
- dimmable,
- 12 mm wide,
- supply voltage 24V DC,
- protection against polarity reversal,
- double-side adhesive tape, easy installation on surface,
- Ip20 Ingress Protection Rating Possible,
- cutting possibility every 100mm (24V)
- packed on 5m rolls,
- possibility to make long rolls,
- designed and manufactured in Europe for W4S USA

\* Parameters tolerance +/- 7%

## Technical specifications

LED package size	5050 RGBW
LED quantity	60/m
Cutting section	24V - 100m
Max. power consumption	19 W/m
Luminous efficacy	48 lm/W
Binning	-
Beam angle	120°
Nominal voltage	24V DC
IP rating	IP20
Colour rendering index	-
Dimmable	Yes

## Light parameters


Colour	IP20	Luminous flux
RGB	460 - 630 nm	360 lm/m
warm	2700 K	850 lm/m
daylight	4100 K	880 lm/m
cold	6500 K	920 lm/m

\* Parameters tolerance +/- 7%

## Product codes

Colour	Voltage	IP20
RGBW	24V	LEDRGBWW24v-19.2 IP20

## Dimensions

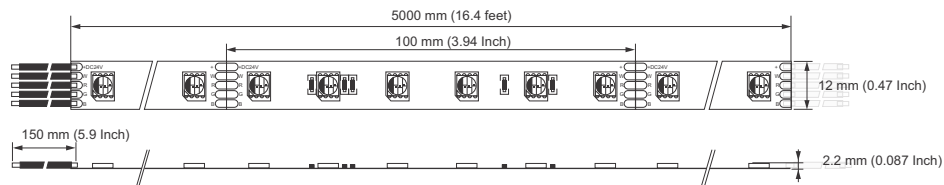

## Ingress protection rating variants



Installation by means of double-sided adhesive tape. <sup>1)</sup>

<sup>1)</sup>3M 9088 or 9448A double-sided adhesive attached.

\* Parameters tolerance +/- 7%