



Model Linea20 0.9" Ceiling LED Strip Channel


- More than 20 accessories available
- Channel sections are assembled with extra clamps
- Angled connectors can be illuminated
- continuous light line (with 120 LEDs/m LED strip and opal cover applied)
- maximum LED source width: 20 mm








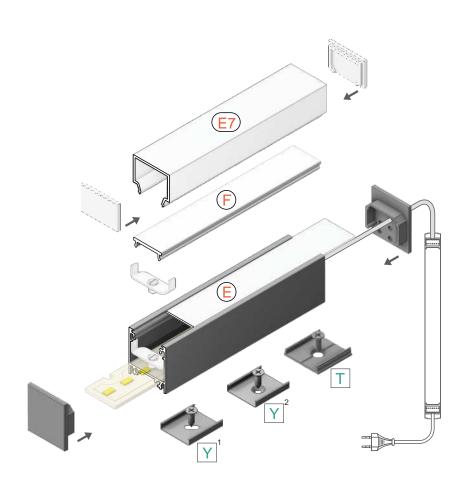





Max LED strip width 20 mm



Standard length: 2000 mm white painted LED-C1020001





black anodized LED-C1020021

raw aluminium LED-C1020000


Available lengths: 1000 mm, 2000 mm, 3000 mm, 4000 mm. The standard profile length tolerance is +2 0 mm.



LINEA20EF/TY



CONTINUOUS LIGHT LINE The LINEA20 180° connector provides an aesthetic, continuous light line of any length.

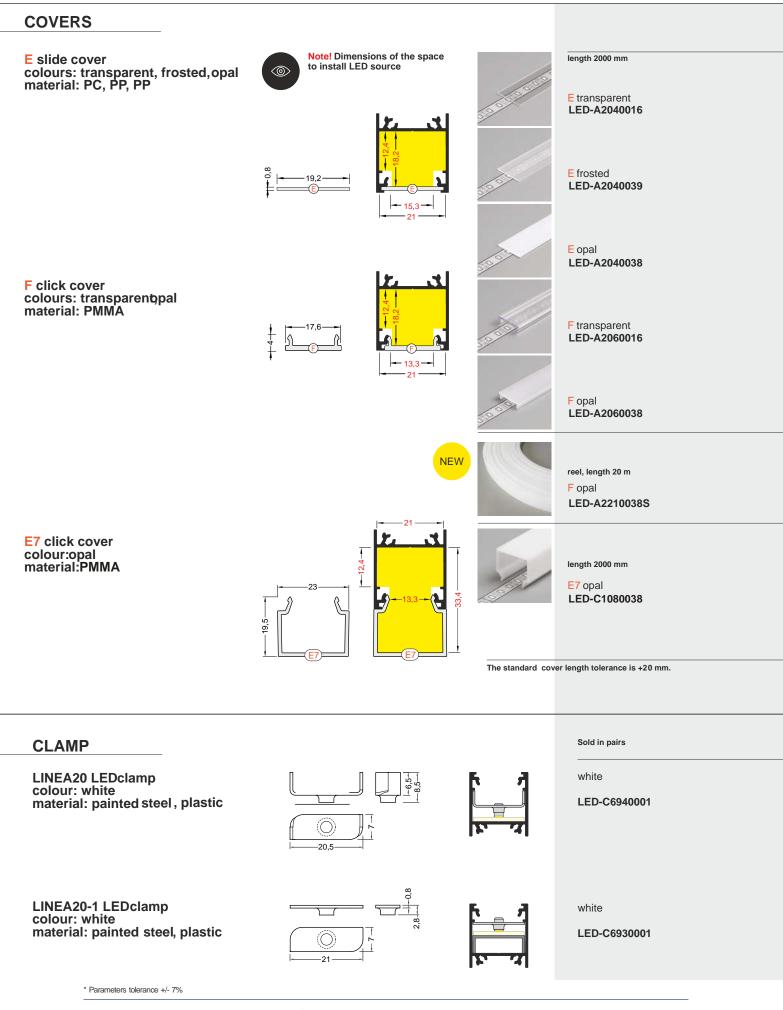

LED MOUNTING

LINEA20 LED mounting material: aluminium

20,6

INDEX = 1 pc, length 2000 mm


raw aluminium

LED-C6060000


Available lengths: 1000 mm, 2000 mm, 3000 mm, 4000 mm. The standard profile length tolerance is +20 mm.

LIGHTING EFFECT

LINAE20 LED mounting + LINEA20-1 LED clamp

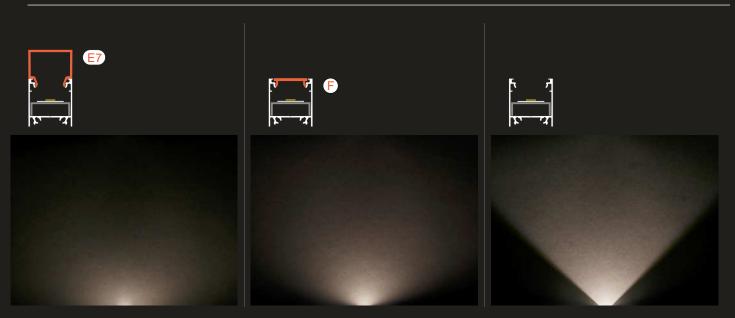


Lighting e ect without LINEA20 LED mounting

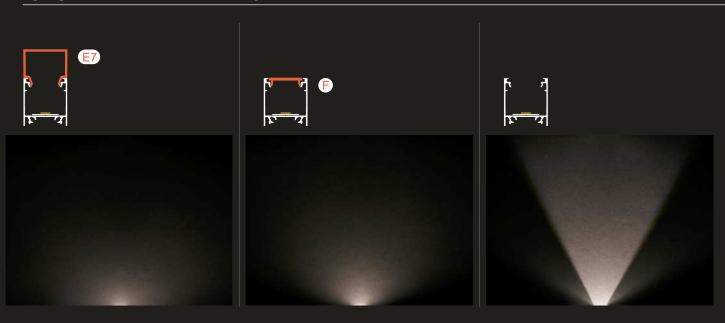



ACCESSORIES ENDINGS


LINEA20 ending colours: white, silver, black, grey material: ABS





Ending with marked space to bothe holes. Possibility of buying dedicated screws.

E7 ending Ending for E7 Click Cover only Colours: OPAL



Pair of endcaps = 2 pieces

White LED-C1940001

Silver LED-C1940040

Black LED-C1940002


Grey LED-C1940022

Pair of endcaps = 2 pieces

E7 opal ending

LED-C1840038

LINEA20-E7 Ending Ending for E7 click cover on Linea20 colours: white, silver, black, grey material: ABS



Ending with marked space to bothe holes. Possibility of buying dedicated screws.

Screws for only LED endings colours: white, silver, black, inox



Pair of endcaps = 2 pieces

White LED-C1999901

Silver LED-C1999940

Black LED-C1999902

Grey LED-C1999922

Pair of endcaps = 2 pieces

White LED-B1900001


Silver LED-B1900040

Black LED-B1900002

inox LED-B1900019



LIN EA 20 EF/TY

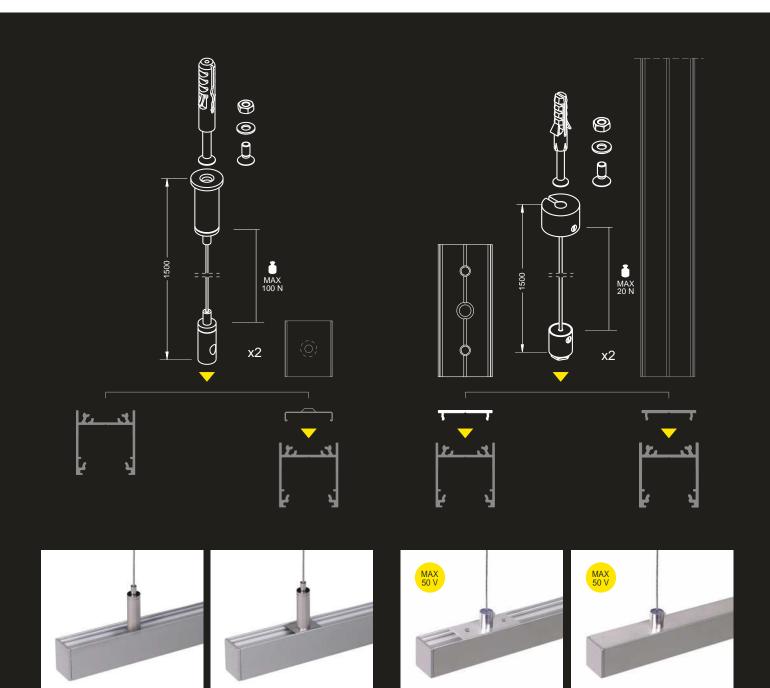


SLING FOR LED MOUNTING 1500

Compatible with flexible mounting plates, allows fast and easy assembly of the luminai Rossibility of direct mounting to the profile.

SELV SLING 50 V 1500 It provides a minimalistic creates an aesthetic, look – no additional wires required.

Using FIX16 profile closed from the top, luminaire.


Drill Ø 5 mm mounting holes in FIX16

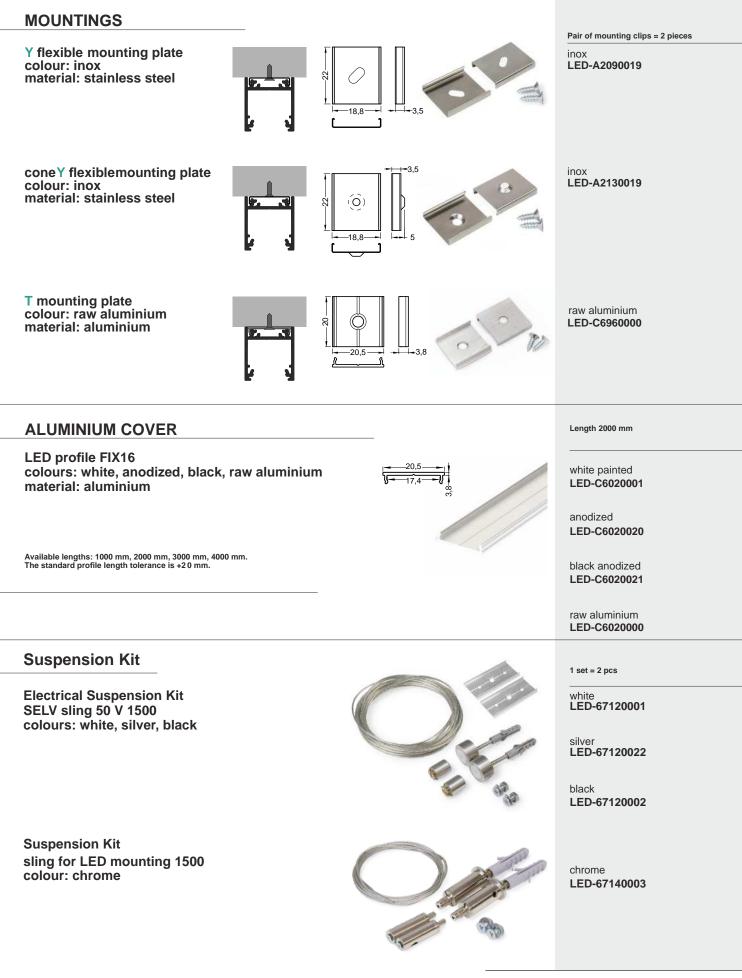



LIN EA 20 EF/TY

CONNECTOR POSSIBILITIES

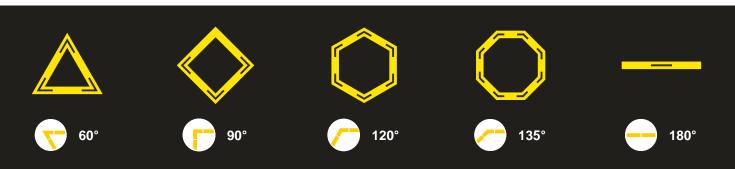

ANGULAR CONNECTORS


Thanks to five di erent angle connectors (60° / 90° / 120° / 135° / 180°) it is possible to create many various Lighting systems – with no need to cut the profile at an angle.

Bent connectors allows to connect profiles in two planes, at two angles: 90° on the inside and 270° on the outside.




The component made of clear fabric provides secure connection, letting light through at the same time. Thanks to that, the luminaire can illuminate on the entire surface of the coveren in the corners.

CONNECTORS

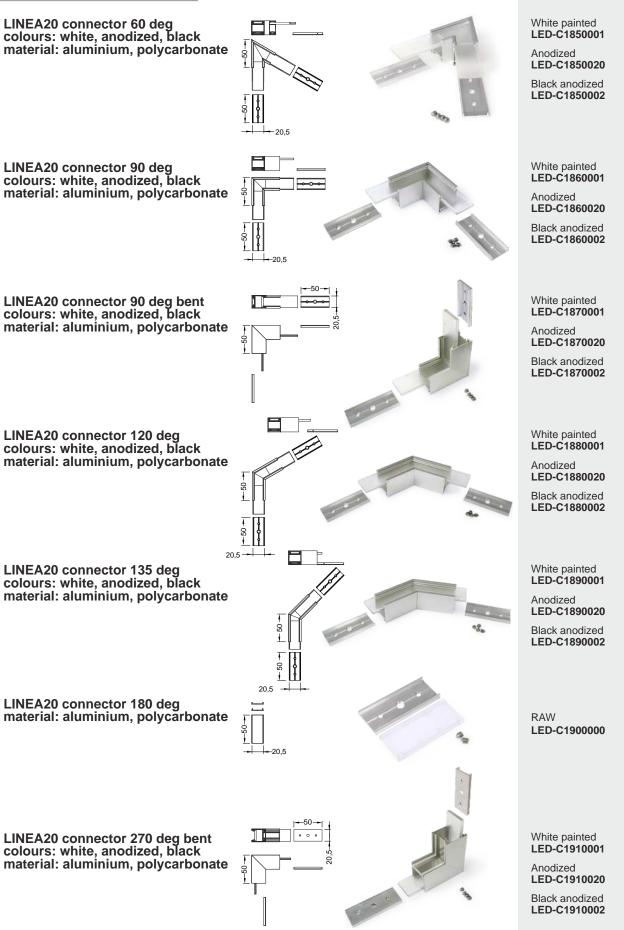

INDEX = 1 set, package

LINEA20 EF/TY

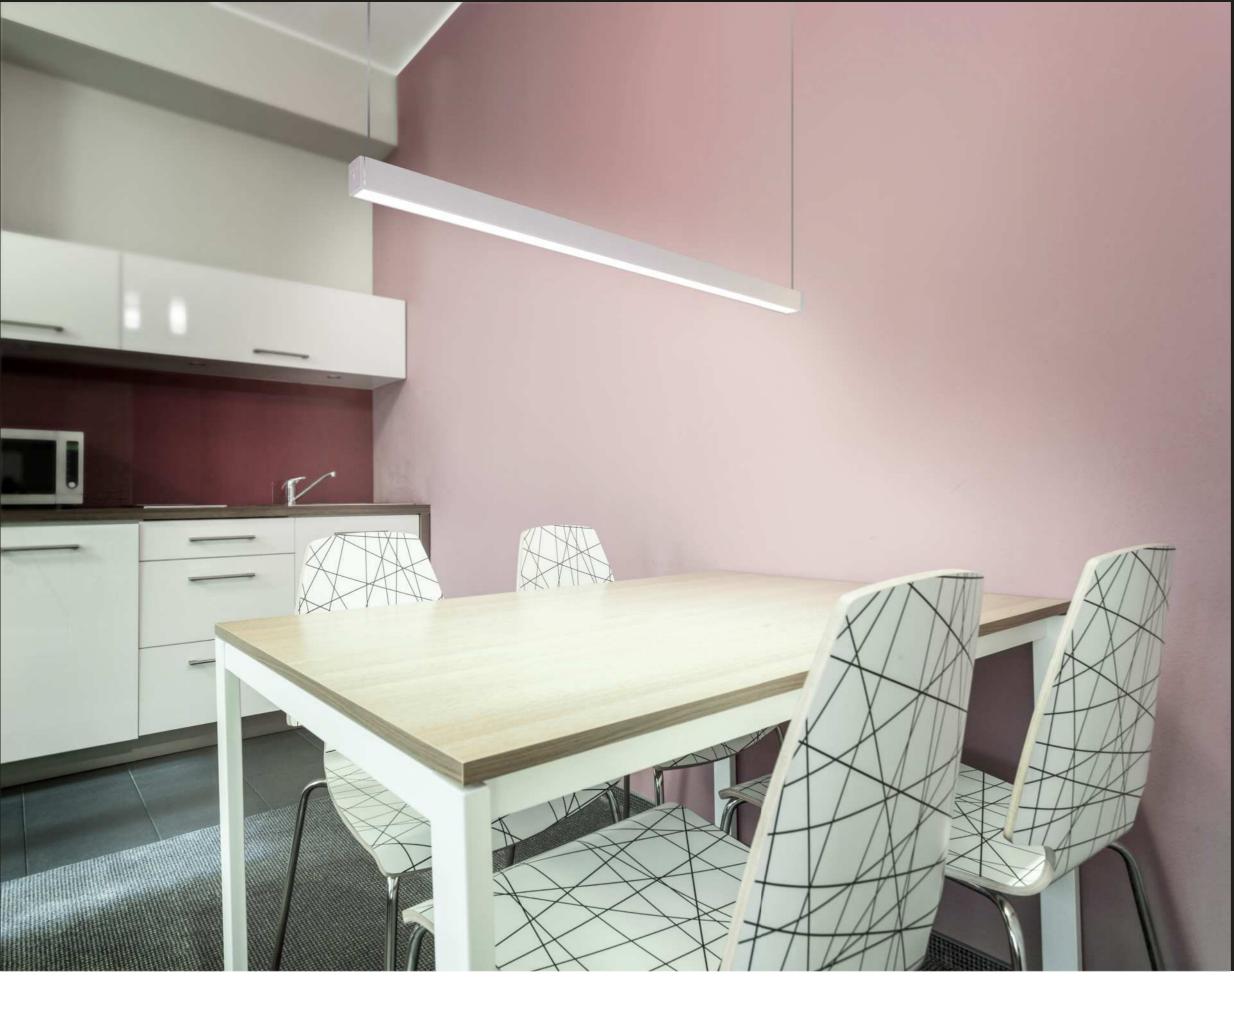

PENDANT LUMINAIRE

Thanks to wide range of profile accessories it could be applied in many arrangementsSELV sling 50 V 1500 and FIX16 closing profile allows to create pendant luminaire with a small intersection, but strong light.