




Model Slash8

Polycarbonate Channel for LED Strip

- easy installation of the LED strip
- installation in a small gap 5x14 mm
- possibility of installation in an arc (minimum bending radius 25 cm)
- continuous line of light when using 120 P/m LED strip
- width of LED strip: 8 mm



* Parameters tolerance +/- 7%

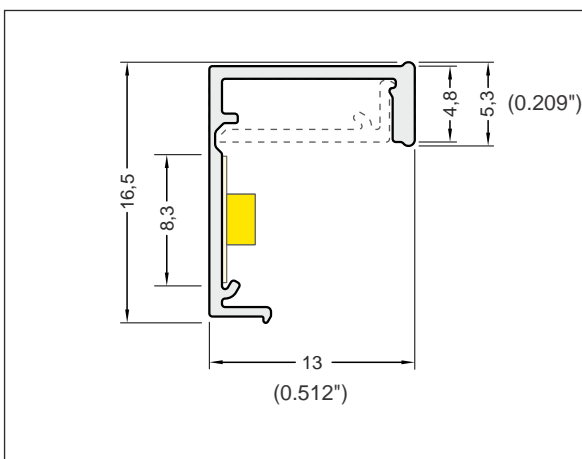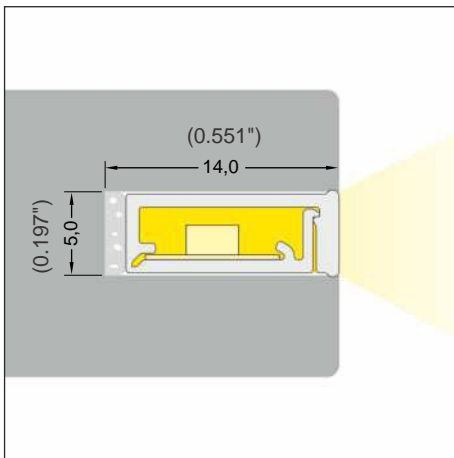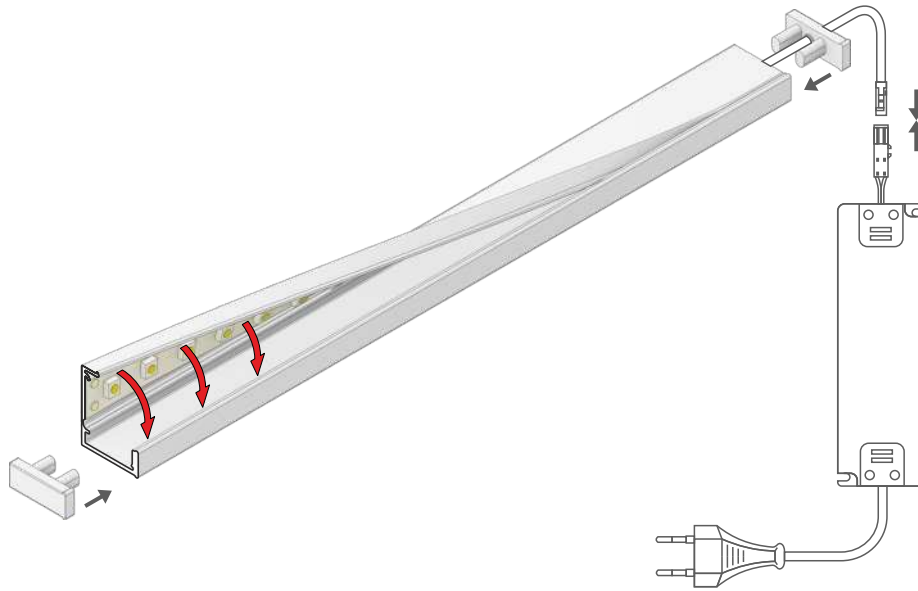

8 mm



recessed



INDEX = 1 pc, length 2000 mm


opal
material: PC

LED-G5000220

Available lengths: 1000 mm, 2000 mm, 3000 mm, 4000 mm.
 The standard profile length tolerance is +20 mm.




Note! Dimensions of the space to install LED source

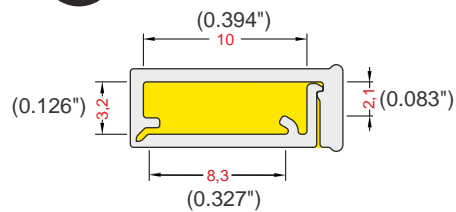

* Parameters tolerance +/- 7% Dimensions in millimeters unless otherwise stated

PAIR OF ENDCAPS

SLASH8 ending
colour: opal
material: PMMA

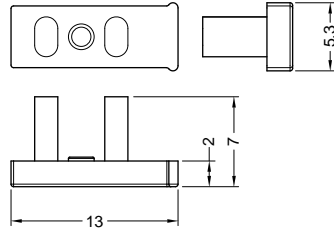

Pair of Opal Endcaps

LED-G5999922-pair



* Parameters tolerance +/- 7%



* Parameters tolerance +/- 7%