



Single Color LED Strip ~Carnation Series

LED strip 2216 180 LEDs per meter

Key Features

- Top-quality components,
- LEDs binned in 3 MacAdam steps,
- LED strip efficiency up to 125 lm / W,
- thick FPC,
- 120 LEDs per meter,
- high color rendering index CRI Ra90 +,
- dimmable,
- only 8 mm wide,
- supply voltage 12V or 24V DC,
- protection against polarity reversal,
- a thermally conductive adhesive, easy installation on surface,
- IP20 or IP68 Ingress Protection Rating possible,
- possible installation by double-sided adhesive tape (IP68+),
- cutting possibility every 25mm (12V) or 50mm (24V),
- packed on 5m rolls,
- possibility to make up to 250 meter long rolls (IP20 only),
- made in Europe for Wired4Signs USA

* Parameters tolerance +/- 7%

Technical specifications



LED package size	2216
LED quantity	120/m
Cutting section	12V - 25 mm 24V - 50 mm
Max. power consumption	8.4 W/m
Luminous efficacy	125 lm/W
Binning	3 SDCM
Beam angle	120°
Nominal voltage	24V DC
IP rating	IP20 IP68
Colour rendering index	90+
Dimmable	Yes

Light parameters

Colour	IP20	IP68	Luminous flux
red	620 - 630 nm		116 lm/m
green	510 - 530 nm		760 lm/m
blue	460 - 470 nm		192 lm/m
yellow	588 - 593 nm		102 lm/m

* Parameters tolerance +/- 7%

Dimensions

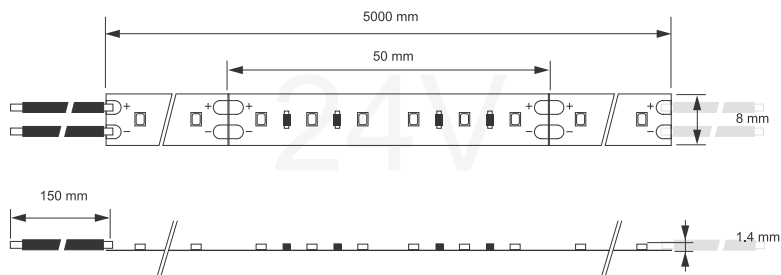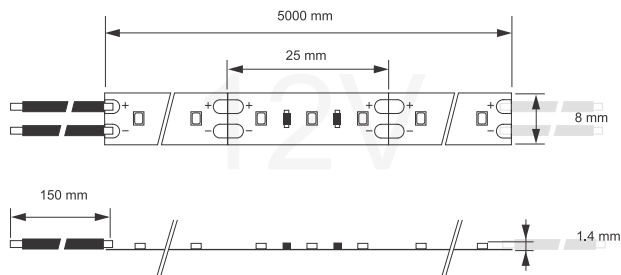


* Parameters tolerance +/- 7%


Ingress protection rating variants



Installation by means of double-sided adhesive tape. ¹⁾



Waterproof. Installation by means of neutral silicone (available in offer). ²⁾



Waterproof. Installation by means of double-sided adhesive tape ¹⁾ or neutral silicone - non acid (available in offer). ²⁾

¹⁾3M 9088 or 9448A double-sided adhesive attached.
²⁾Use only neutral silicone.

* Parameters tolerance +/- 7%