


# SMOOTH12 BC/Q9

NEW

## SUBTLE CORNICE WITH A GLOW OF LIGHT

- installation to the wall without a drywall system
- invisible profile, atmospheric light
- accentuating of the room outline
- maximum LED strip width: 12 mm

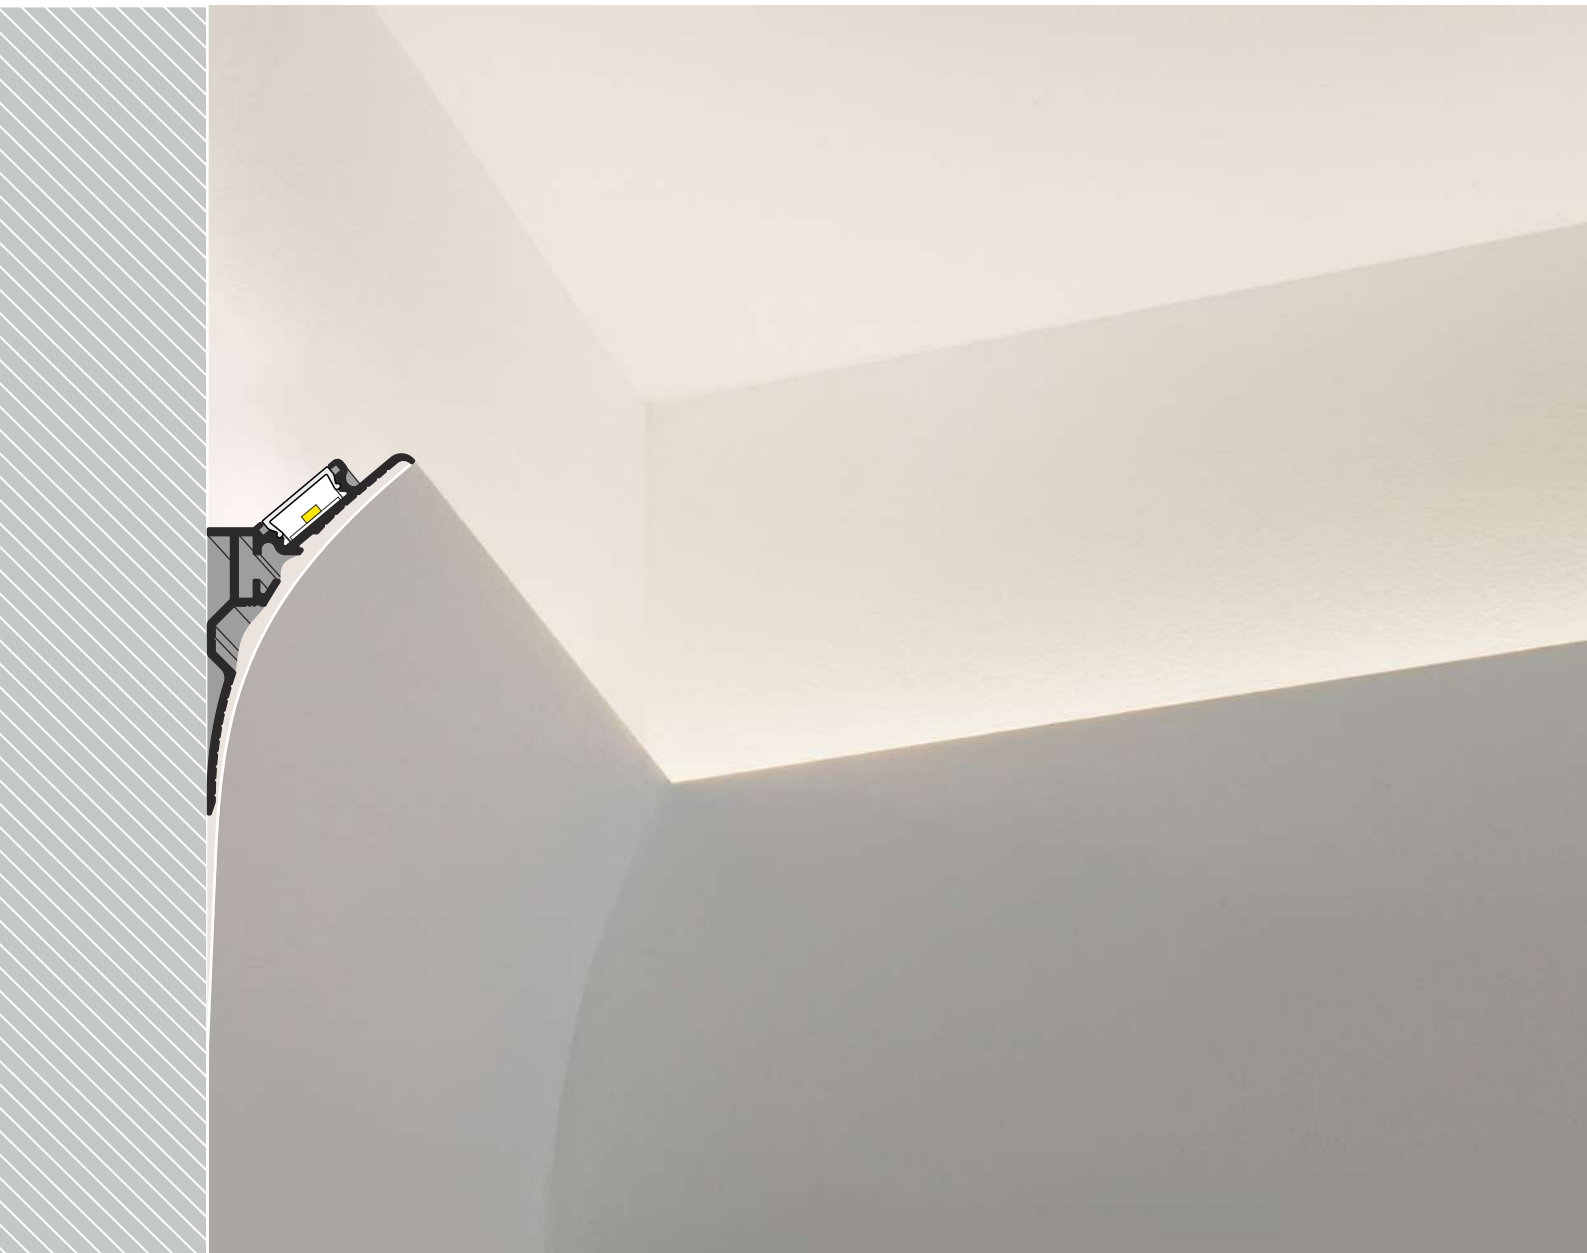

## SIMILAR IN THE OFFER



WAY10  
C




**B** slide cover

**C** click cover

**Q9**<sup>1</sup> Q9-90 deg bent connector

**Q9**<sup>2</sup> Q9-180 deg connector

other angles of Q9 connectors:  
45, 60, 90, 120, 135 deg

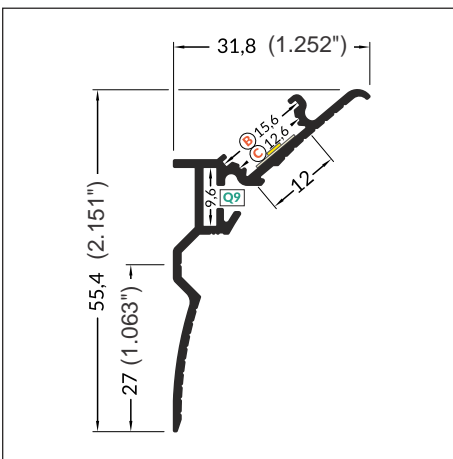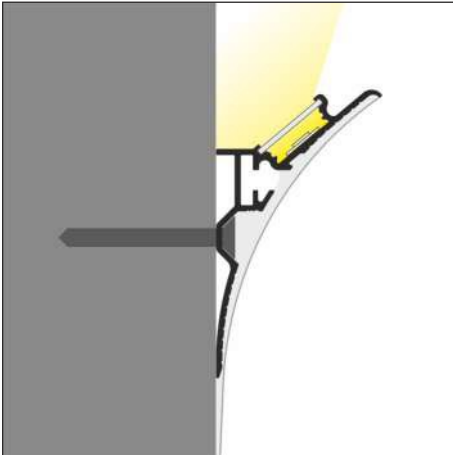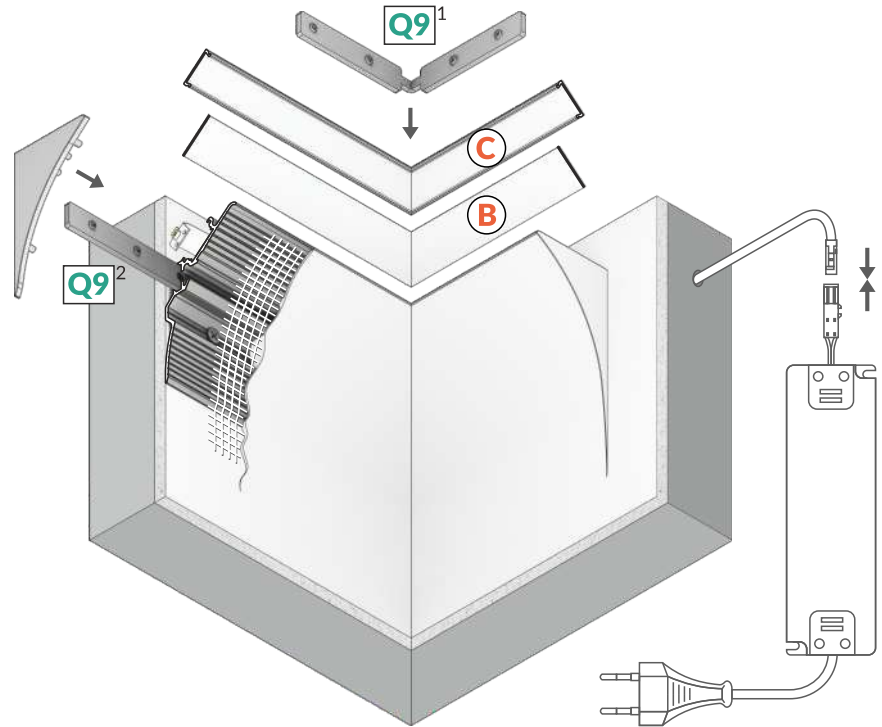

INDEX = 1 pc, length 2000 mm

raw aluminium

**LED-H9000200**




The standard profile length tolerance is +20 mm.

# ACCESSORIES

## COVERS

**B** slide cover  
 colours: transparent, frosted, opal  
 material: PC, PP, PP

**C** click cover  
 colours: transparent, opal  
 material: PMMA

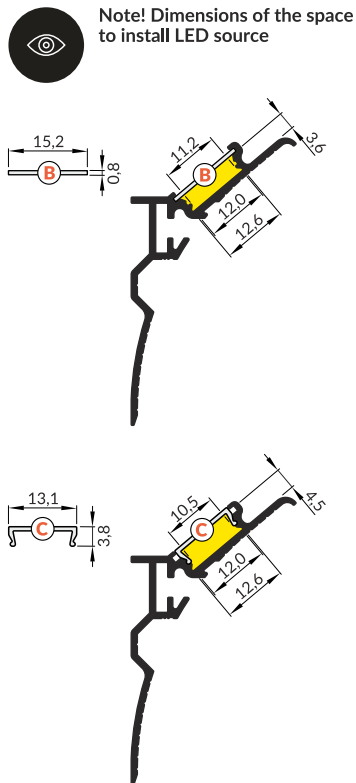

length 2000 mm

B transparent

B frosted

B opal

C transparent

C opal


reel, length 20 m

C opal

The standard cover length tolerance is +20 mm.

## ENDINGS

**SMOOTH12** ending  
 colour: grey  
 material: ABS

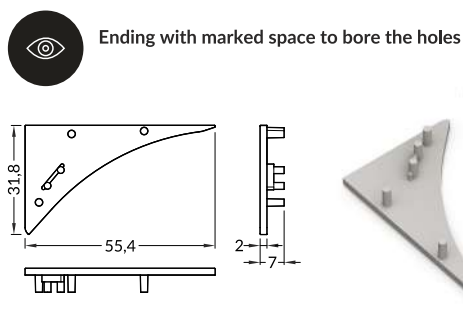


grey

## CONNECTORS

**Q9-90 deg bent** connector  
 material: zink coated steel


**Q9-45 deg / -60 deg / -90 deg / -120 deg / -135 deg / -180 deg** connector  
 material: zink coated steel

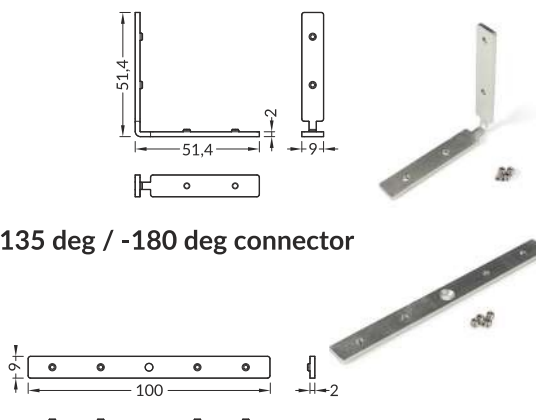

90 deg bent

180 deg

# ACCESSORIES

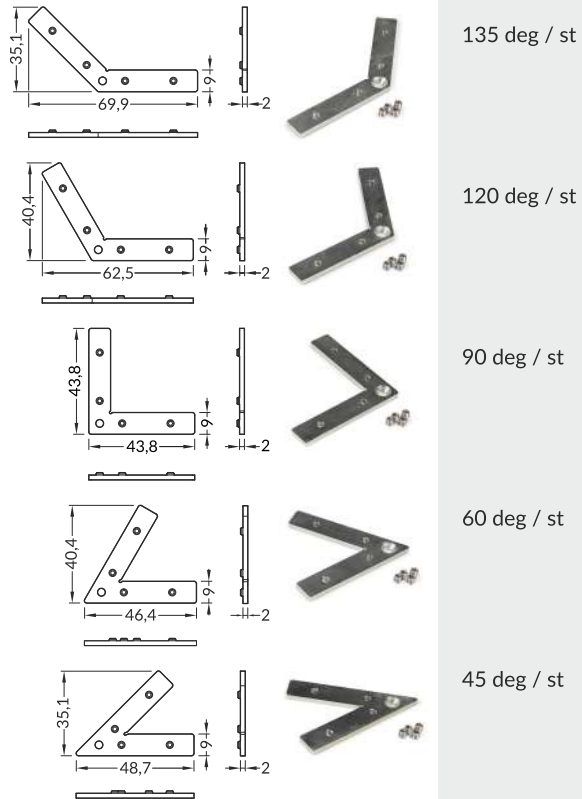

\* Parameters tolerance +/- 7%

