

Led profile ~ Washington

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised. The profile is suitable for aisles and walls, where it offers Up&Down led lighting. Its central channel houses the power supply and allows the cables to pass through for the circuit's closure, therefore reducing steep voltage drops. Suitable for led strips with a maximum width of 25mm and a power not greater than 40W/m. In order to obtain a more homogeneous illumination, while also improving the dot free effect, we recommend using our Iris series LED strips.

We offer a 2 year guarantee on our profiles and covers.



Aluminium profile
 LED-09.006 anodised silver 3m




Polycarbonate cover
 LED-18.064 opal 3m



Plastic endcaps
 LED-19.142 grey without hole



Clip
 LED-20.025 chrome steel

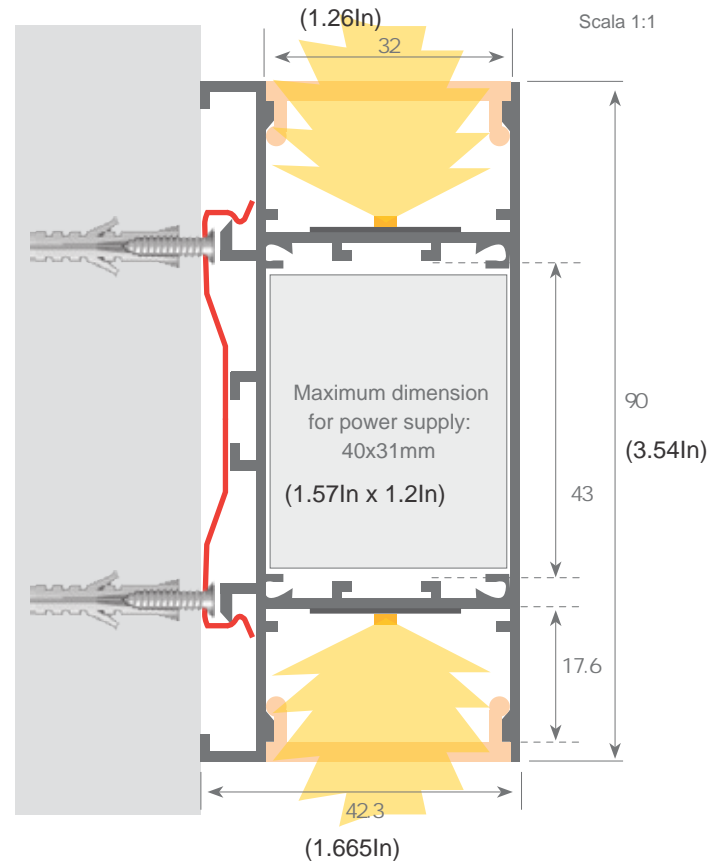

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001
 Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2 / Theoretical weight: 1.450kg / Alloy: 6063
 Perimeter: 641.4mm / Anodising minimum: 15 microns / Aluminium purity: 95-98% / Material treatment: T-5 / CoversFireproof VØ

* Parameters tolerance +/- 7%