


SILICONE RUBBER SHEETING PLATINUM CURED CALENDERED

NGP 60 PLATINUM

60°SHA TRANSLUCENT AS STANDARD

TEMPERATURE RANGE

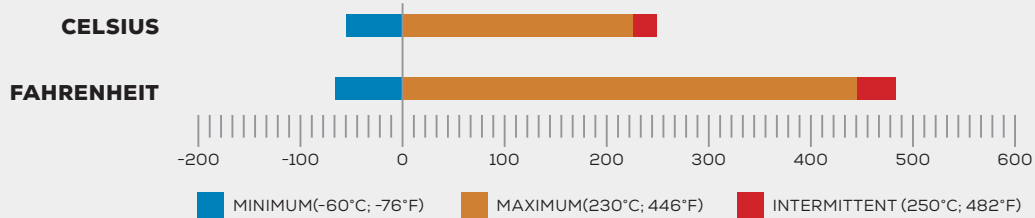

GENERAL INFORMATION

TYM Cured Silicone Rubber Sheets are produced from high quality grades exhibiting good transparency and mechanical properties. The Sheets are properly postcured to comply with the requirements of FDA, BfRand EU 1935/2004 food contact regulations.

Translucent has been approved to WRAS for use with potable water at teperatures up to 85°C. There products meet the flammability requirement of FAR 25/ JAR 25/ CS 25 Appending F, Part 1, (a)(1)(iv) and (a)(1)(v) horizontal flammability tests and Automotive standard Part 571FMVSS302.

ENVIRONMENTAL RESISTANCE

Silicone rubber products have an excellent resistance to:

- Ozone
- Oxidation
- Ultraviolet light
- Corona discharge
- Cosmic radiation
- Ionising radiation
- Weathering in general

TECHNICAL DATA SHEETS

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product within the scope of technical progress or developments. The recommendations made in this leaflet should be checked to preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are being used. The recommendations do not absolve the user from the obligation of investing the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

SILICONE RUBBER SHEETING PLATINUM CURED CALENDERED

AVAILABILITY FORMAT

- Supplied in continuous roll lengths
- Widths of 1000mm (standard)
- Pressure sensitive adhesive backing
- Punched and Water jet gaskets
- Full range of standard colours
- Capability to colour match

TYPICAL APPLICATIONS

TYM Platinum Cured Silicone Sheets contain no peroxide curing agents and are generally used where peroxide biproducts need to be avoided. Applications include:

- Domestic & Commercial Catering Equipment
- Food
- Pharmaceutical
- Medical
- Beverage
- Water industries

MECHANICAL PROPERTIES

PROPERTY	TEST METHOD	UNIT	SILBIONE MM71160 USP (1)	SILBIONE MM71160 USP (2)
HARDNESS SHORE A	DIN 53 505		62	60
APPEARANCE			TRANSLUCENT	TRANSLUCENT
SPECIFIC GRAVITY	DIN EN ISO 1183-1 A	g/cm ³		1.18
TENSILE STRENGTH	DIN 53 504 S 1	MPa	11.5	12.2
ELONGATION AT BREAK	DIN 53 504 S 1	%	440	580
TEAR STRENGTH	ASTM D 624 A	kN/m	22	24
IMPACT RESILIENCE	DIN 53 512	%	55	49
COMPRESSION SET	DIN ISO 815-B (22H / 177°C)	%	34	44

TECHNICAL DATA SHEETS

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product within the scope of technical progress or developments. The recommendations made in this leaflet should be checked to preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

SILICONE RUBBER SHEETING PLATINUM CURED CALENDERED

ACCREDITATIONS

- FDA compliant
- BfR compliant
- USP Class VI compliant*
- REACH compliant and RoHS compliant

*the used rubber is compliant as per below information however, the production process is not certified to the same level. Please speak to your sales support for additional information.

ADDITIONAL INFORMATION

ATTESTATION

**2 - COMPONENT ADDITION CURE SYSTEM:
SILBIONE HCRA 71160 A & B**

Classification of Plastics following the USP Class VI

By analogy to Elkem Silicones' **SILBIONE® HCRA 4160 ACE**, which successfully passed the following tests required by USP Class VI for skin contact healthcare applications or healthcare applications less than 29 days implantation, according to study endpoints required by ISO 10993, the specific biotests conducted for the analogous materials being the following:

1. Acute Systemic Toxicity in Mice- USP Class VI
2. Intracutaneous Toxicity in Rabbits - USP Class VI
3. 7-Day Intramuscular Implantation study in Rabbits - USP Class VI

Elkem Silicones' **2-Component Extrusion Addition Cure Silicone System based on SILBIONE MM 71160 U SP**, a substantially equivalent material used according to the technical conditions described in our technical document n° **SIL 016-0190** (March 2016), will also meet these testing requirements.

Creation date: July 2019
Valid until: July 2022

TECHNICAL DATA SHEETS

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product within the scope of technical progress or developments. The recommendations made in this leaflet should be checked to preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.