
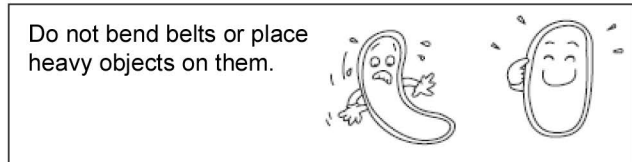
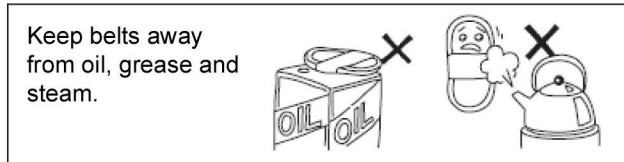
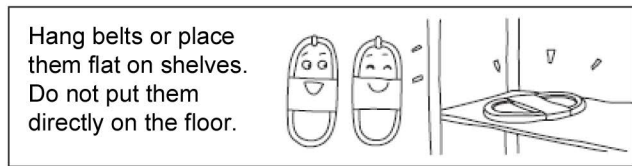


# Storage of Automotive Belts

---

Please keep the following in mind when storing belts.

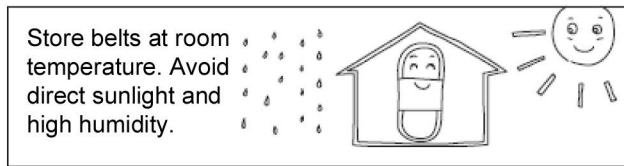

## ■ NOTE

1. Use Mitsubishi part number as indicated in application section only.
2. Make sure to use a Rawedge Cogged belt if "PART No." starts with RECMF.
3. Do not use new belts with old ones together as a set. It may cause belt breakage.
4. Agricultural V-belts and general industry V-belts are different from automotive belts structurally and cannot replace them.

## ***For Your Safety***

---



### Danger

- Do not use a belt as a lifting or towing tool.
- Make sure engine is turned off and at a complete stop before inspecting or replacing the belt.



### Warning

- Always select replacement belts to match vehicle requirements. Belts are designed to be used only on the make and model for which they are designed.
- Carefully follow vehicle manufacture's step-by-step procedure when replacing the belt. Failure to follow manufacture's guidelines may cause engine damage.
- Do not expose belts to engine oils and other chemicals, which may cause belt deterioration.



### Caution

- Surface color of belts may change while storing, this will not affect the use or life expectancy of belts.