


Gas Ranges



PRODUCT SPECIFICATIONS

- 30,000 BTU per top burner (NG)
- 12" x 12" cast iron grates with aeration bowl
- Standing pilot light for individual burners
- 33,000 BTU each static oven (NG)
- Oven interior side guides & bottom porcelain coated
- Oven thermostat adjusts from 200°F - 500°F
- Manual gas controls
- Stainless steel front, back riser, and lift off shelf
- Stainless steel legs standard
- "Cool-to-the-touch" front s/s deck
- Flue located on back of unit for ample ventilation
- Easy to remove full width crumb tray
- Range is fully serviceable from the front
- Optional casters available. All swivel with front locking brakes

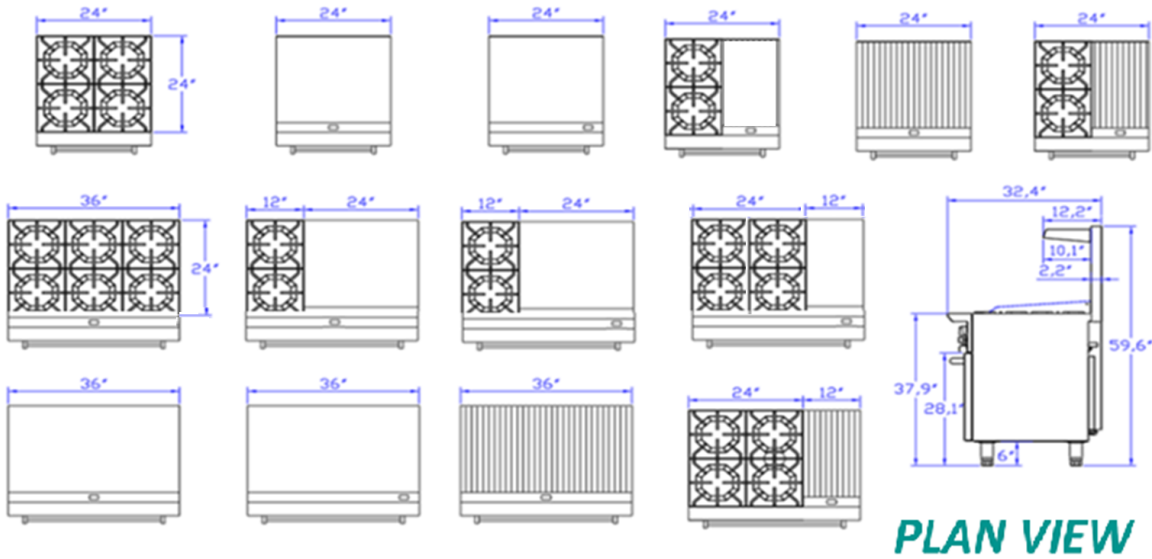

PLAN VIEW

Model	Gas Type	Width	Total BTU	Shipping Dimensions			Shipping Wt.
				Width	Depth	Height	
SML-R24	NG	24"	153,000	27 1/2" 70cm	36 1/2" 93cm	43 3/4" 111cm	354 lbs 161kg
SML-R24-CB12-2B	NG	24"	128,000	27 1/2" 70cm	36 1/2" 93cm	47" 119cm	362 lbs 164kg
SML-R24-2B12G	NG	24"	123,000	27 1/2" 70cm	36 1/2" 93cm	47" 119cm	378 lbs 172kg
SML-R36	NG	36"	213,000	39 1/2" 100cm	36 1/2" 93cm	43 3/4" 111cm	468 lbs 212kg
SML-R36-2B24G	NG	36"	153,000	39 1/2" 100cm	36 1/2" 93cm	47" 119cm	527 lbs 240kg
SML-R36-4B12G	NG	36"	183,000	39 1/2" 100cm	36 1/2" 93cm	47" 119cm	498 lbs 226kg
SML-R36-CB36	NG	36"	138,000	39 1/2" 100cm	36 1/2" 93cm	47" 119cm	488 lbs 222kg
SML-R36-24CB-2B	NG	36"	163,000	39 1/2" 100cm	36 1/2" 93cm	47" 119cm	484 lbs 220kg

. 3/4" NPT gas connection
 . Legs adjustable from 6" - 7 1/2" total leg height.

. NG gas 5" W.C.; LP gas 10" W.C.
 . Certification:

