



## Specification

Tue Oct 17 17:12:25 CEST 2017

### SCC SelfCookingCenter® XS E (4 x 13 x 18 inch)



5 years warranty on steam generator

#### Capacity

- Three (3) GN 2/3 (1 1/2") or GN 2/3 (2 1/2 ") or four (4) 1/2 size sheet pans
- Removable, swivel hinging rack with flexible rack options on 7 levels

#### Standard Features

- Electrically heated table device for automatic cooking of meat, poultry, fish, side dishes, vegetables, egg dishes, desserts, bakery products and for automatic rethermalization
- Mixed loads with individual supervision of each rack, depending on type, load amount, and the number of door openings
- LED cooking cabinet and rack lighting - energy-saving, durable and low-maintenance
- Unit base with surrounding seal
- Rear-ventilated triple-pane cooking cabinet door, two hinged inside panes (for easy cleaning) with a special heat-reflecting coating
- Combi-steamer according to DIN 18866, DIN 10535 for selective use of steam and hot air, separately, sequentially, or combined
- Integrated Ethernet and USB port
- Lengthwise loading for 2/3, 1/2, 1/3 GN (12" x 14", 12" x 10", 12" x 7") accessories, 1/2 size sheet pans and steam pans
- No water softening system or additional descaling is necessary
- 2-Year parts and labor warranty
- 5-Year steam generator warranty
- No-charge 4-hour RATIONAL certified chef assistance program
- Core temperature probe with 6 measuring points, including positioning aid - automatic error correction in case of incorrect positioning
- 1% - accurate regulation of moisture, adjustable, and retrievable via the control panel
- Combi-steamer mode °F/(°C): steam: 85 to 265/(30 to 130), hot air: 85 to 575/(30 to 300), combination: 85 to 575/(30 to 300)
- Individual programming of at least 1,200 cooking programs with up to 12 steps transferable via USB
- Hand shower with automatic retracting system
- Moisturising in 3 steps of °F/(°C) 85 to 500/(30 to 260)

- High-performance fresh steam generator, pressureless, with automatic filling and automatic decalcification
- Dynamic air circulation in cooking cabinet with reversing wheel fan with 5 fan speeds, programmable
- Integral, maintenance-free grease extraction system
- Turbo fan cool down function
- Automatic adaptation to the installation location (elevation)
- 304 (DIN 1.4301) stainless steel material inside and out
- Seamless interior and with rounded corners
- Demand-related energy supply
- 5 programmable proofing stages
- Automatic, pre-selected starting time with adjustable date/time
- Delta-T cooking

#### Operation

- Digital, graphically supported overview of the current cooking chamber climate, review and forecast as well as repeat and change options at the end of the cooking process
- Remote control function for the appliance using software and mobile app
- Control second unit from the main unit (units must be connected via ethernet or network)
- Real-time information about automatic adjustments on current cooking process
- Self-learning operation, automatically adapts to actual usage
- Intelligent energy-management system controls the energy and airflow, fully automated
- Record mode – determination of the ideal cooking process for calibrated products using the core temperature probe for subsequent use without a core temperature probe, with automatic consideration of the load quantity
- Self-configurable, user-specific operating display 8.5" TFT color monitor and touch screen with self-explanatory symbols for ease of operation
- Application and user manuals can be viewed on the unit display for the current actions

#### Safety features

- Detergent and Care Tabs (solid detergents) for optimum working safety
- HACCP data output and software update via the integrated Ethernet and USB port
- Safety temperature limiter for steam generator and hot-air heating
- VDE approved for unsupervised operation (e.g. overnight cooking or cleaning)
- Maximum rack height 5 ¼ ft./1.60 m when original stand is used
- Integral fan impeller brake
- Door handle with right/left and slam function

#### Cleaning and Care

- Self-cleaning and care system for cooking cabinet and steam generator, regardless of the water pressure supplied
- 7 cleaning stages for unsupervised cleaning and care - even overnight
- Automatic cleaning and descaling of the steam generator
- Automatic cleaning prompts indicating the cleaning stage and volume of chemicals in relation to the level of soiling
- Soiling and care status are displayed on the monitor
- Diagnostic system with automatic service notices displayed
- Self-test function for actively checking unit's functions
- 100% biodegradable Cleaner and Care tabs

#### Approval/Labels





# Specification

Tue Oct 17 17:12:25 CEST 2017

## SCC SelfCookingCenter® XS E (4 x 13 x 18 inch)

### iCookingControl - Automatic cooking



7 application modes for meat, poultry, fish, side dishes, egg dishes, desserts, baked goods and Finishing® (rethermalization)

### Combi-Steam mode



Steam °F/(°C) 85 to 265/(30 to 130)



Hot air °F/(°C) 85 to 575/(30 to 300)



Combi °F/(°C) 85 to 575/(30 to 300)

### HiDensityControl®



Highest steam saturation, and dynamic air mixing for perfect and even cooking

### Efficient CareControl



Efficient self-cleaning CareControl recognizes soiling and scale and removes it

### iLevelControl



Mixed loads with individual monitoring of every rack depending on the quantity of the load as well as the number of door openings.

### Technical Specification

Dimensions	Width	Depth	Height
Exterior	25 3/4" (655 mm)	21 7/8" (555 mm)	22 3/8" (567 mm)
Shipping	34 5/8" (880 mm)	37" (940 mm)	29 1/2" (750 mm)

Weight	
Max Per Shelf	22 lbs
Max Load Size	44 lbs
Net	158.7 lbs
Shipping	185.2 lbs

Size	Electric. 60 hz	Breaker	Cable connection	Running Amps
XS	208V 3 PH	30A*	#12	16.5 amps
XS	240V 3 PH	30A	#12	19.0 amps
XS	208V 1 PH	50A	#8	27.5 amps
XS	240V 1 PH	50A	#8	31.5 amps

Each is delivered with power cable and angled plug. 1 PH 208-240V 6-50P; 3 PH 208-240V 15-30P \*Rated for 30 amp breaker due to plug size, 20 amp breaker is adequate. Use copper wire only. 3Ph 4-wire system (3 wire w/ ground)-dedicated 3 pole circuit breaker required. 1 Ph L1, L2, G-dedicated 2 pole circuit breaker required. 208 v is field retrofittable to 240v, 480v is field retrofittable to 440v. Do not use fuses. The XS has been tested in accordance with EPA test method 202. The total amount of grease-laden effluents collected was 0.21 mg/m<sup>3</sup> for bone-in, skin-on roasting chickens weighing 2-1/2 to 3-1/2 lbs quartered. The results are considered to comply with UL710B, Section 59, formerly Section 14 of UL 197, Eight Edition, Supplement SB, and NFPA96, paragraph 4.1.1.2. Request full UL Report Letter- Reference: UL Project : 4787499569.

### Thermal load and airflow requirements

Latent	283 W
Sensible	375 W
Unit free standing	13314 ft <sup>2</sup> /h
One side against a wall	8405 ft <sup>2</sup> /h
Noise values	65 dBA

### Clearance Requirements

To facilitate servicing, we recommend leaving a 18"-20" (450-500 mm) gap on the left-hand side of the unit. If there is not 18"-20" (450-500 mm) left side clearance available, provisions for moving the unit or appliance to the left for service access must be made. These include, but are not limited to, having quick connections (water, gas, etc.) and lengthened electrical connections with flexible cords. If there are no external heat sources acting on the unit, there should be a minimum gap of 1/2" (10 mm) to the left, right, and back of unit. The left hand gap must be a minimum of 14" (350 mm) if a high temperature heat source is on the left side of the unit. Recommended clearance from unobstructed rear exhaust pipes and any surface collecting grease or flammable material; 10" (254 mm) electric. It is recommended to have a hood overhang of 6" (150 mm) to 18" (450 mm) at the front of the unit and 6" (150 mm) on the side if installed at the end of the cooking line. Please refer to the Installation Manual for further technical data and for instructions on installation and setup. Installations must comply with all local electrical, plumbing, and ventilation codes.

### Connected load electric

Hot air connection:	5.4 kW
Steam connection:	5.4 kW
Connected load electric:	5.7 kW

### Water Requirements

Connection	3/4" GHT
Supply	Minimum 1/2" ID Drinking Quality Cold
Pressure	21-87 psi (1.5-6 bar)
Average Treated Water	1 gal/h
Consumption	
Min/Max Flow Rate	3 gpm/5.3 gpm
Water Drain	1 1/2" OD (40 mm) hub

Connect only to 2" (XS = 1 5/8") high-temperature resistant pipe. Water discharge temperature can be field adjusted to meet section 701.7 of the International Plumbing Code. Contact RATIONAL for back flow recommendation.

### Water Quality

Sodium ion exchangers are not recommended; H+ Ion exchange systems are recommended. Water that does not meet the following minimum standards will require the proper conditioning.

Contaminant	Water Requirements	If > than recommended
Sand/Particles	< 15 µm	Particle filter
Chlorine (Cl <sub>2</sub> )	< 0.12 gr/gal (0.2 ppm)	Active carbon filter
Chloride (Cl <sup>-</sup> )	< 4.68 gr/gal (80 ppm)	RO or deionization

### RATIONAL USA Inc.

1701 Golf Road, Suite C-120, Commerceium  
Rolling Meadows, IL 60008  
Toll Free: 888-320-7274, Fax.: 847-755-9583

Visit us on the internet: [www.rationalusa.com](http://www.rationalusa.com)


We reserve the right to make technical improvements



# Specification

Tue Oct 17 17:12:25 CEST 2017

## SCC SelfCookingCenter® XS E (4 x 13 x 18 inch)

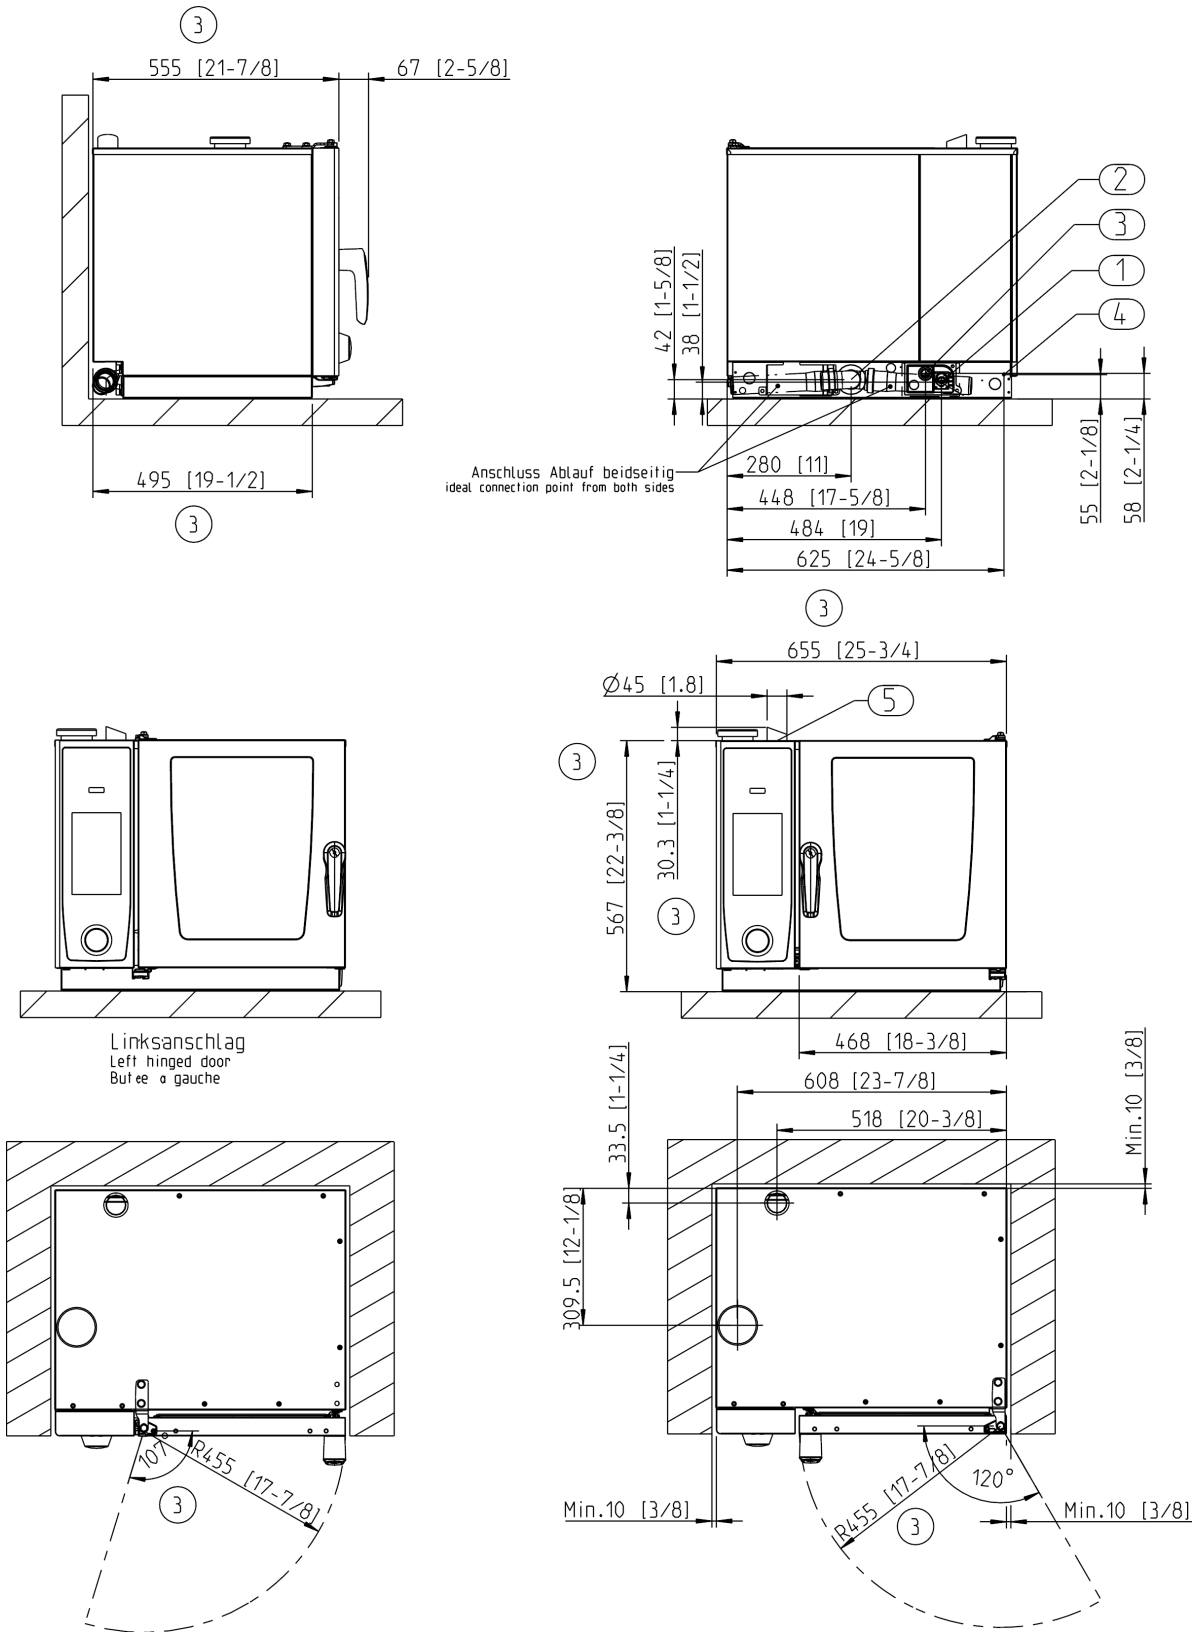

1. Common water supply (cold water) "Single" water connection as shipped 2. Drain 2" OD 3. Electrical connection wire entrance 4. Chassis Ground connection 5. Steam Vent pipe 2 3/8" / 60mm Minimum Clearance 2" / 50 mm Left side clearance 20" recommended for servicing of unit without the ability to move unit while connected. Measurements in mm (inch)



# Specification

Tue Oct 17 17:12:25 CEST 2017

## SCC SelfCookingCenter® XS E (4 x 13 x 18 inch)

### ELECTRICAL OPTIONS (all 60Hz) Special voltages available upon request

Voltage / breaker / running amps / AWG	Voltage / breaker / running amps / AWG
<input type="checkbox"/> 208V 1 Ph / 50 / 27.5 / #8 - field retrofittable to 240 V	<input type="checkbox"/> 240V 1 Ph / 50 / 31.5 / #8
<input type="checkbox"/> 208V 3 Ph / 30 / 16.5 / #12 - field retrofittable to 240 V	<input type="checkbox"/> 240V 3 Ph / 30 / 19 / #12

### ACCESSORIES

<input type="checkbox"/> Installation Kits – include electrical, water and drainage connection	
<input type="checkbox"/> 208 or 240/60/1Ph- copper drain	87.01.404US
<input type="checkbox"/> 208 or 240/60/1Ph- CPVC drain	87.01.403US
<input type="checkbox"/> 208 or 240/60/3Ph- copper drain	87.01.402US
<input type="checkbox"/> 208 or 240/60/3Ph- CPVC drain	87.01.201US
<input type="checkbox"/> RATIONAL Cleaner Tabs without phosphorous – guarantee maximum cleaning power	56.00.210A
<input type="checkbox"/> RATIONAL Care Tabs – prevents scale deposits	56.00.562
<input type="checkbox"/> Certified installation by RATIONAL SERVICE-PARTNERS	See document
<input type="checkbox"/> UG I stationary stand	60.31.018
<input type="checkbox"/> UG I stationary stand for Combi Duo	60.31.020
<input type="checkbox"/> Stackable Combi-Duo kit, – for stacking XS 6⅔	60.73.768
<input type="checkbox"/> Wall mount attachment	60.30.968
<input type="checkbox"/> Condensation breaker – to divert steam from the unit into existing hood system	60.74.037
<input type="checkbox"/> UltraVent XS - ventless condensation hood – UL approved	60.74.159
<input type="checkbox"/> Combi Duo UltraVent XS adapter kit	60.73.945
<input type="checkbox"/> RATIONAL USB data-memory stick – for transferring cooking programs and HACCP data	42.00.162
<input type="checkbox"/> VarioSmoker – for a large variety of smoked products	60.73.010
<input type="checkbox"/> Integration kit with UltraVent	60.74.285
<input type="checkbox"/> Hinging rack	60.73.724
<input type="checkbox"/> For a full list of ⅔ size accessories for ideal grilling, baking, roasting, frying, rotisserie, steaming, Finishing®, and much more	See accessories brochure

### FACTORY INSTALLED OPTIONS (special order)

- Left-hinged door 208V / 240V / 1PH | 208V / 240V / 3PH
- Door safety lock – handle is turned left then right before the door can be opened