



## SM-IM-68 CUBE ICE MACHINE

VERTICAL TYPE (EXCLUSIVE)

### INNER COMPONENTS

Our machine use "durable core" micro-computer control system. It has voice function to broadcast "fault". You can adjust the thickness of the ice depending on your requirement.



Voltage: 115V/60HZ  
 Current: 5.5A  
 Refrigerant: R404a/6.7oz  
 High-Side Design Pressure: 507 PSIG  
 Low-Side Design Pressure: 174 PSIG  
 Harvest Cycle Load: 6.0A  
 MIN.Water Pressure: 19 PSIG  
 MAX.Water Pressure: 80 PSIG



### DESCRIPTION

MODEL	ICE CAPACITY	ICE STORAGE	GROSS WEIGHT	POWER	LENGTH	WIDTH	HEIGHT
SM-IM-68	30Kg (66Lb)/24h	10Kg / 22Lb	38Kg / 84Lb	270W	460mm(18.2")	430mm(17")	796mm(31.4")


Water supply and drainage series must meet the following conditions:

Water temperature (°C)	Water pressure (Mpa)	The water inlet pipe diameter (mm)	Drain pipe diameter (mm)
>0.6	>0.13	>9.5 (3/8")	>15.8 (5/8")
<32	<0.55		Fall/meter>3cm

### PRODUCTS SIZE Unit:mm

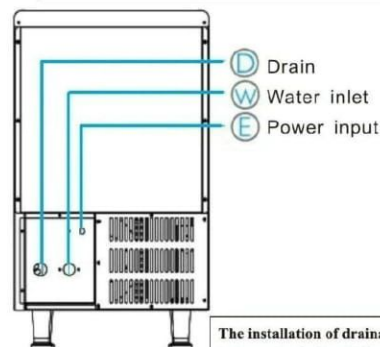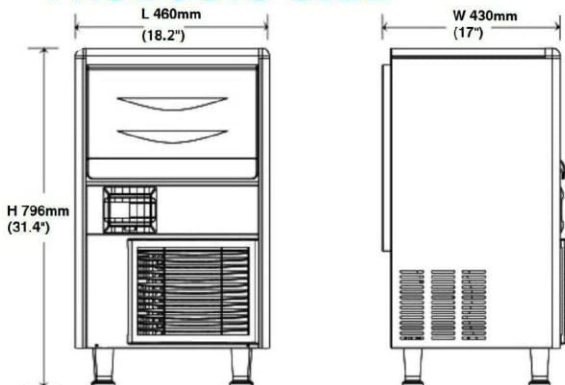

\*\*\*Specifications subject to change without notice

The installation of drainage must meet the following rules:   
 1. Any point in the middle of the drainage pipe shall not be higher than the outfall.  
 2. Any point in the middle of the drain pipe shall not be higher than the previous one.

