


Ku-Band Ext. Ref. PLL LNB

Features:

- 1dB Gain Compression +10dBm
- Suitable for high data rate digital communication applications
- Low power consumption
- Low noise

TYPICAL SPECIFICATIONS SPCR5400 series

No	Item	Specification		
-1	RF Input Frequency	11.70 to 12.20 GHz	12.25 to 12.75 GHz	10.95 to 11.70 GHz
-2	IF Output Frequency	950 to 1450 MHz		950 to 1700 MHz
-3	Local Frequency	10.75 GHz	11.30 GHz	10.00 GHz
-4	Local Frequency Stability	Phase locked to external reference		
-5	Requirement for External Reference	Supplied through the center conductor of IF cable [Frequency] 10MHz(sine wave) [Input Level] 0 to -10dBm @ IF out [Phase Noise] -134dBc/Hz max. @ 100 Hz -144dBc/Hz max. @ 1 KHz -154dBc/Hz max. @ 10 KHz -154dBc/Hz max. @ 100 KHz		
-6	Local Phase Noise:	Offset Frequency	Phase Noise	
		100 Hz	-70 dBc/Hz	
		1 KHz	-80 dBc/Hz	
		10 KHz	-85 dBc/Hz	
		100 KHz	-105 dBc/Hz	
-7	Noise Figure	0.8dB max. @ +25°C		
-8	Gain	55 to 70 dB over Frequency & Temperature		
-9	Gain Ripple	1 dB p-p max per 36MHz segment across the frequency band		
-10	1 dB Gain Compression Poi	+10 dBm min.		
-11	Spurious in Rx Band	-140dBm max. @ waveguide input excluding Rx out \pm 1 MHz measured at RF Input power -85dBm		
-12	Input Voltage	+12 to +24 V supplied through center conductor of the IF cable		
-13	Current	220 mA		
-14	Input Interface	WR-75, Waterproof - Mated with matching flange and O-ring		
-15	Output Interface	Standard: F-Type, 75 Ω , female, Waterproof Option: N-Type, 50 Ω , female, Waterproof		
-16	Size	125(L) mm x 60(W) mm x 22(H) mm (4.9 x 2.3 x 0.8 in) w/o flange		
-17	Weight	340g (F-Conn) / 348g (N-Conn)		
-18	Operating Temperature	-40°C to +60°C		
-19	Storage Temperature	-40°C to +80°C		

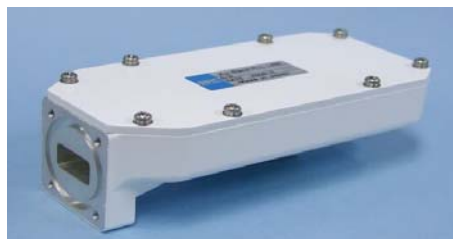

Ku-Ext. Ref PLL LNB Ordering Information:

