


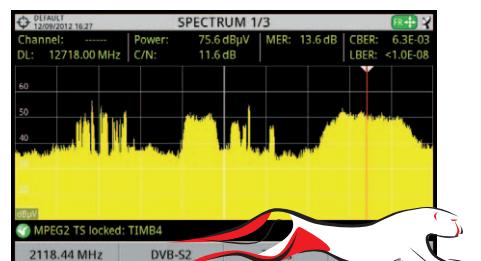


## HD field strength meter (19" rack version)

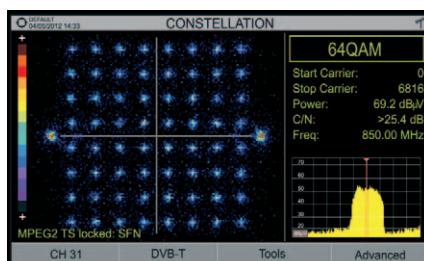

CAM module and smart card not included

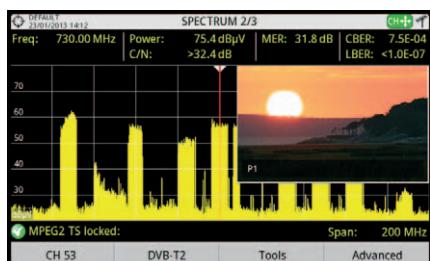

### 6th generation of TV & Satellite analysers

- ✓ Triple split screen: 3 functions in a single screen.
- ✓ Fast and accurate spectrum analyser.
- ✓ StealthID: Instant identification of tuning parameters.
- ✓ Advanced functions for satellite.
- ✓ Powerful datalogger and installations menu.
- ✓ Optical fibre + 5 GHz RF input as an option.
- ✓ Digital radio DAB/DAB+ receiver and analyser as an option.
- ✓ Expanded connectivity: ASI-TS, Common Interface, HDMI, IPTV.
- ✓ USB to PC connection.
- ✓ Constellation diagram. Dynamic echoes analysis.

The **HD RANGER 2** features a new 7" touch screen with excellent brightness and superior image sharpness that can also be used wearing gloves. It features all **HD RANGER+** functions (including all second-generation DVB standards) plus IPTV input, Common Interface (CAM) for encrypted channels, HDMI interface and TS-ASI input/output.

**Optical measurements** and 3 GHz band extension can also be included as an option.

# HD field strength meter (19" rack version)

SPECIFICATIONS	<b>HD RANGER 2</b>
<b>GENERAL SPECIFICATIONS</b>	
Inputs and outputs RF input Video/Audio input/output DVB-ASI input/output IP interface USB interface Monitor display External units power supply Terrestrial band Satellite band 22 kHz signal DiSEqC generator Dimensions and Weight Battery operation time Included accessories	F male connector, 75 Ω 2 jack multipole connectors BNC female, 75 Ω (max bitrate 80 Mbps) RJ45 connector, ethernet 10/100/1000 Mbps. UDP/RTP protocol Mini-USB. Mass storage host, Serial port emulation, USB CDC "Communications Device Class" 7" touch screen TFT, 16:9 Through the RF input connector External, 5, 12 and 24 V External, 13 V, 15 V, 18 V Selectable in Satellite band According to DiSEqC 1.2 standard <sup>(1)</sup> 290 (W.) x 185 (H.) x 95 (D.) mm. 2.2 kg. > 5 hours in continuous mode Jack 4V/RCA cable, USB Cable On-the-go (A) Male – Mini USB (B) Male connection cable, USB Cable (A) Female – Mini USB (A) Male connection cable, Car lighter charger, External DC charger, F/H to BNC/H / DIN/H / F/H adapters, Mains cord, Transport belt, Carrying bag, Transport suitcase, Quick Ref. Guide
<b>MEASUREMENT MODE</b>	Displayed data: Numeric and level bar From 5 to 1000 MHz (Terrestrial), from 950 to 2150 MHz (Satellite)
Frequency margin DVB-T COFDM DVB-T2 Base and Lite COFDM DVB-C QAM, J83 Annex C QAM DVB-C2 COFDM PAL, SECAM and NTSC analogue television FM radio DVB-S QPSK DVB-S2 QPSK, 8PSK, 16APSK, 32APSK DSS QPSK	Power (35 to 115 dBµV), CBER, VBER, MER, C/N, Link margin. Power (35 to 115 dBµV), CBER, C/N, LBER, MER, Link Margin, BCH ESR, LDP iterations, wrong packets Power (45 to 115 dBµV), BER, MER, C/N and Link margin Power (45 to 115 dBµV), CBER, MER, C/N, LBER, BCH ESR, LDP iterations and wrong packets M, N, B, G, I, D, K and L Level measurement Power (35 to 115 dBµV), CBER, MER, C/N and Link Margin Power (35 to 115 dBµV), CBER, LBER, MER, C/N, BCH ESR, wrong packets and Link Margin Power (35 to 115 dBµV), CBER, VBER, MER, C/N and Noise margin
<b>SPECTRUM ANALYSER MODE</b>	From 5 to 1000 MHz (Terrestrial), from 950 to 2150 MHz (Satellite) From 60 dBµV to 135 dBµV (Adjustable in steps of 5 dB) Full span / 500 MHz / 200 MHz / 100 MHz / 50 MHz / 20 MHz / 10 MHz From 10 to 130 dBµV 100 kHz
<b>VIDEO</b> Codecs Max image size HDMI output resolution	MPEG-1, MPEG-2, MPEG-4 AVC H.264 1920x1080x60i; 1280x720x60p/50p 1920x1080
<b>AUDIO CODECS</b>	MPEG-1, MPEG-2, HE-AAC, Dolby Digital and Dolby Digital Plus
<b>TOOLS</b>	Constellation diagram, Dynamic echoes analysis, LTE Ingress test, Attenuation Test(2), Datalogger mode(3), PLST code selection, ISI filtering, Transport Stream Analyser, Transport Stream Recording, Screenshots key, MER by carrier, Merogram, Spectrogram, Signal monitoring, Field strength, Task planner, H.265 detection
<b>OPTIONS</b>	Optical fibre (Selective OPM + Optical to RF converter + 5 GHz aux RF input) DAB / DAB+ digital radio GPS
<b>MECHANICAL FEATURES</b> Dimensions Weight	483 (W) x 177 (H) x 73 (D) mm. 4 kg approx.

(1) DiSEqC™ is a trademark of EUTELSAT.

(2) Attenuation Test function designed to be used with **RP-110** multiple pilot generator.

(3) Using NetUpdate 4 software application under Windows PC platform.