




# QUANU 全友

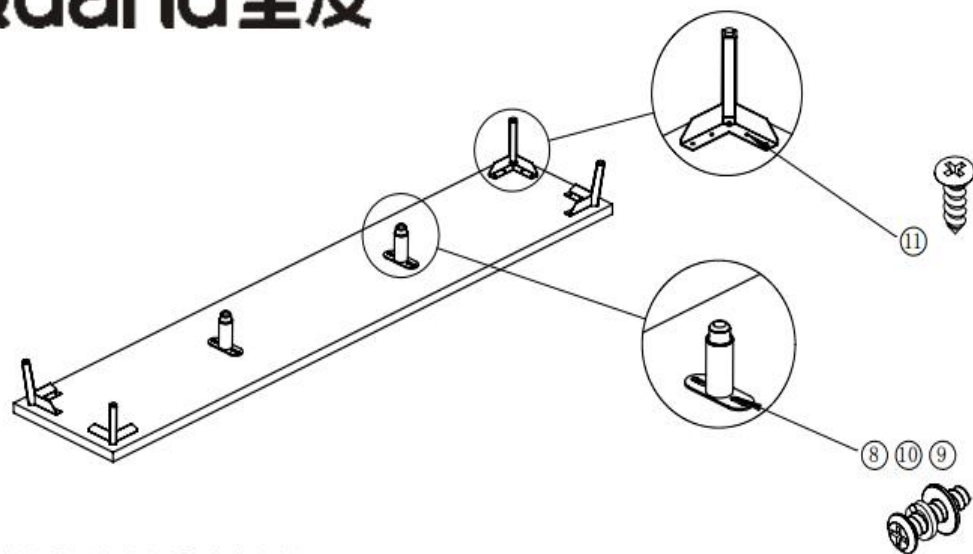


- 1、
  - a. The metal leg adopts ⑪ to connect the 1.
  - b. The Adjustable leg ⑱ adopts ⑧, ⑩ and ⑨ to connect the 1.
  - c. After the installation of the leg, ensure that the height of the ⑱ is consistent with other metal leg.

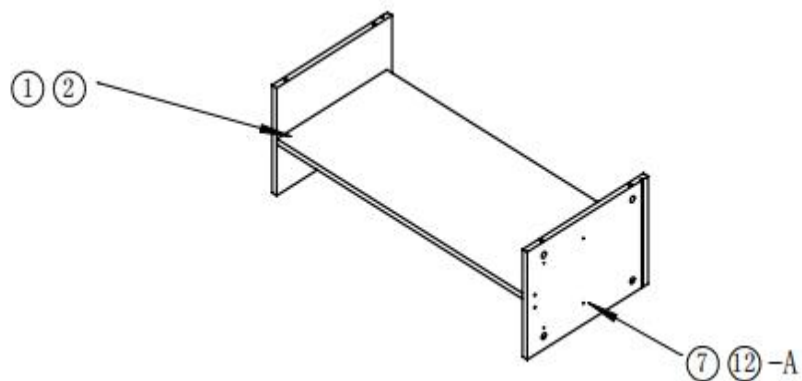


- 2、
  - a. Use ⑦ to install the sliding rail ⑫-A in the 5 and 6.
  - b. The 16 adopts ② and ① to connect the 3 and 5.

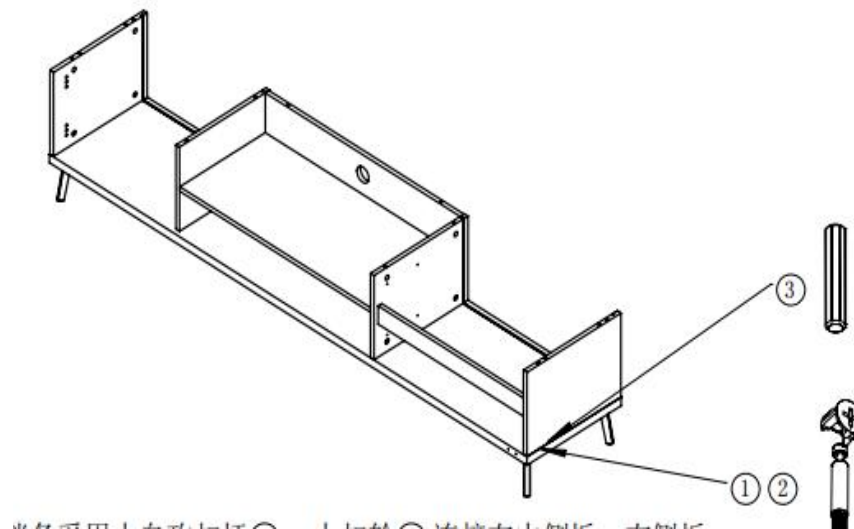


- 3、
  - a. The 18 adopts ① and ② to connect the 5 and 6.
  - b. The 2 and 6 are connected to the 1 with ①, ② and ③.
  - c. The 3, 5 and 8 are connected to the 1 using ① and ②.

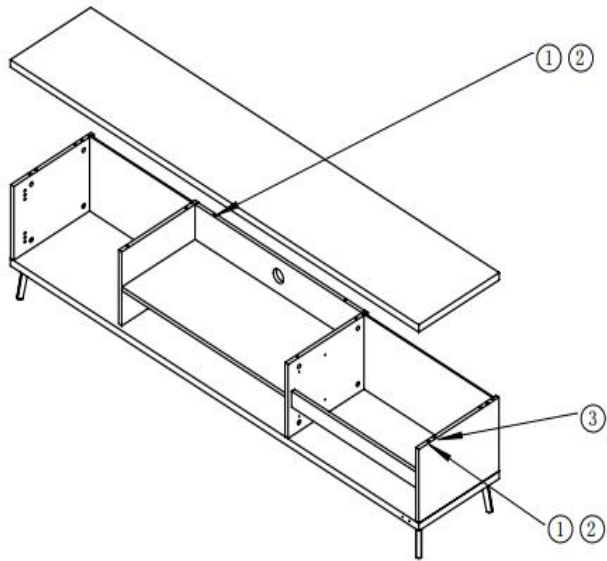


4、  
 a. Insert the 7 and 9.  
 b. The 4 adopts ①, ② and ③ to connect the 2 and 6.  
 At the same time, use ① and ② to connect the 3 , 5 and 8.

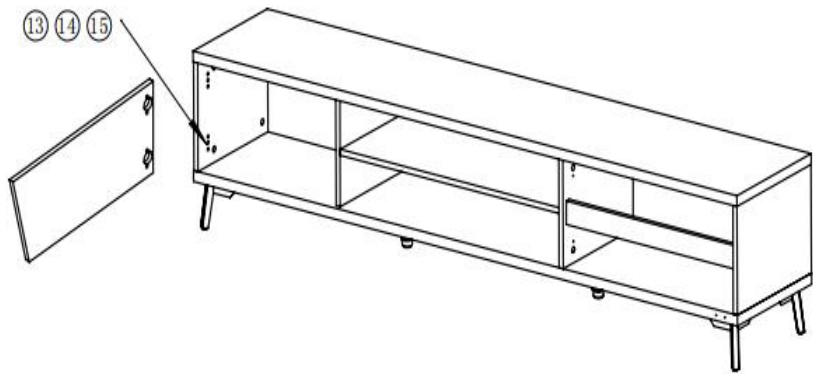


5、  
 First, Each hinge ⑬ are installed in the corresponding position of the door plate 15 with ⑮.  
 Then connect with the corresponding side plate of the cabinet with ⑮ and ⑭.  
 (Note: When connecting the cabinet with hinges, install the screw on the corresponding rubber plug hole first. Then fixed with self-tapping nails)

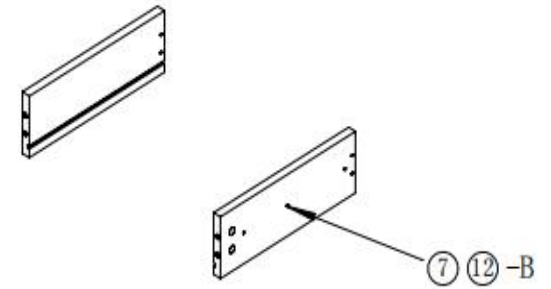


6、  
 Use ⑦ to install sliding rail ⑫-B on the outside of the 11 and 12.

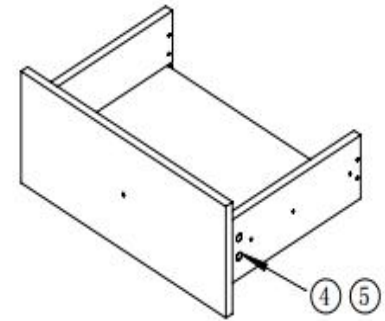

7、  
 the 11 and 12 adopts ⑤ and ④ to connect the 14 and 17, then insert the 10.

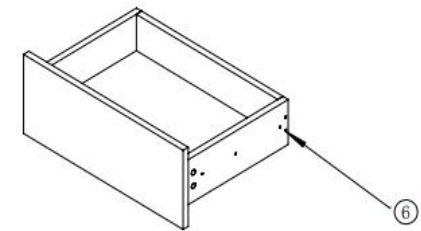

8、 ⑥ are used to connect the 11 .12 and 13.

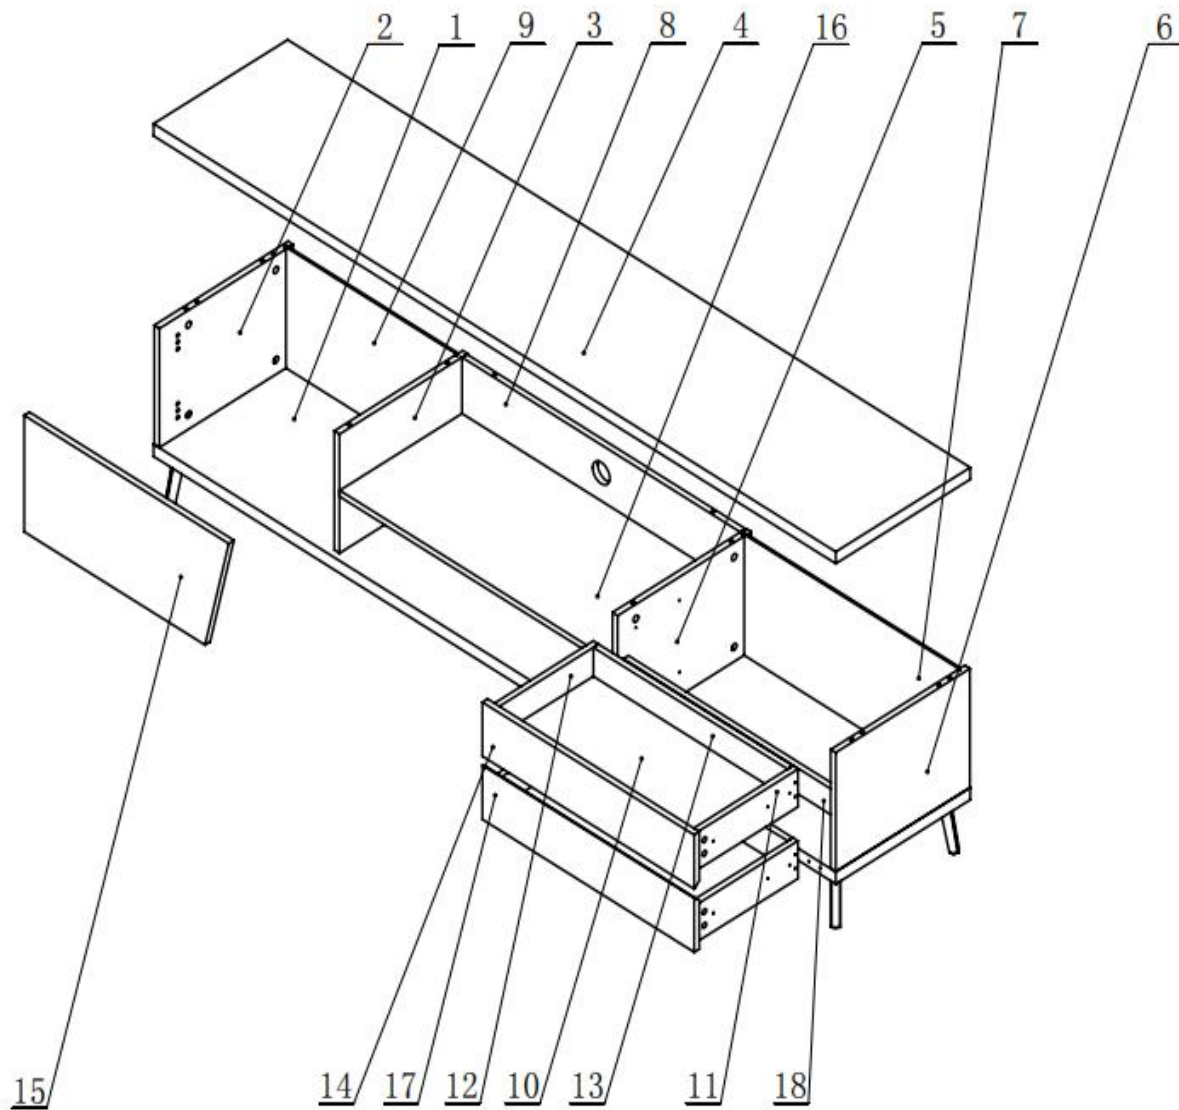



















Item	Name	Spec.	Qty
1	Base plate	1800X394	1
2	Left side plate	278X393	1
3	Left middle side plate	278X376	1
4	Top plane	1800X394	1
5	Right middle side plate	278X393	1
6	Right side plate	278X393	1
7	Right soft backplane	633X286	1
8	Middle backplane	697X278	1
9	Left soft backplane	424X286	1
10	Drawer bottom	293X576	2
11	The right drawer side	300X88	2
12	The left drawer side	300X88	2
13	Drawer end	568X88	2
14	Upper drawer surface	621X126	1
15	Door panel	520X272	1
16	Grating	697X358	1
17	Lower drawer surface	621X126	1
18	drawer check rail	620X60	1

9、

a. Exposed hole paste ⑩.

b. Insert the drawer, adjust the distance between the drawers to 2mm, the installation is complete.

## Hardware List

No.	Name	Picture	Qty.	No.	Name	Picture	Qty.	No.	Name	Picture	Qty.
①	Large tapping buckle bar		24	⑦	M3.5*14 cross countersunk head tapping screw		16	⑬	Embedded hydraulic hinge large base four holes		2
②	Large buckle wheel		24	⑧	M8*20 cross round head galvanized screw		2	⑭	M4*14 cross countersunk self-tapping nails (nickel-plated)		4
③	8*35 Wood tip		8	⑨	Dia. 8mm flat washer		2	⑮	M4*12 cross countersunk nickel plated screw		8
④	Small tapping buckle bar		8	⑩	Dia. 8mm spring pad		2	⑯	Furniture sticker		8
⑤	Small buckle wheel		8	⑪	M4*16 cross countersunk head tapping screw		8	⑰	Metal leg		4
⑥	M3*30 cross countersunk head tapping screw		24	⑫	250MM three-section rail (Width 36mm)(Black)		4	⑱	Adjustable leg		1