



- 1,
  - a. The bottom of the 3 and 4 are installed with ⑰ evenly.
  - b. The 3 and 4 are connected with 5 using ②, ①, ⑦.
  - c. The 3 and 4 are connected to the 1 with ②.①.

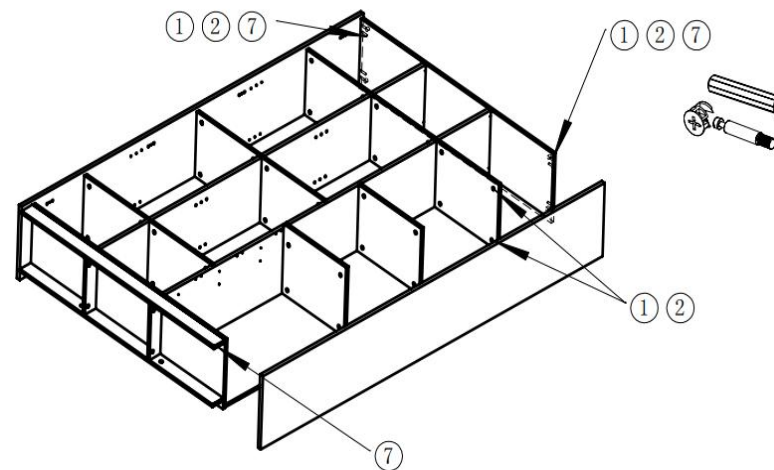


3.
 


The 2 and 6 are connected with the 3 and 4 by ⑦.  
At the same time, ②,①,⑦ are used to connect the 1, 9,13,7

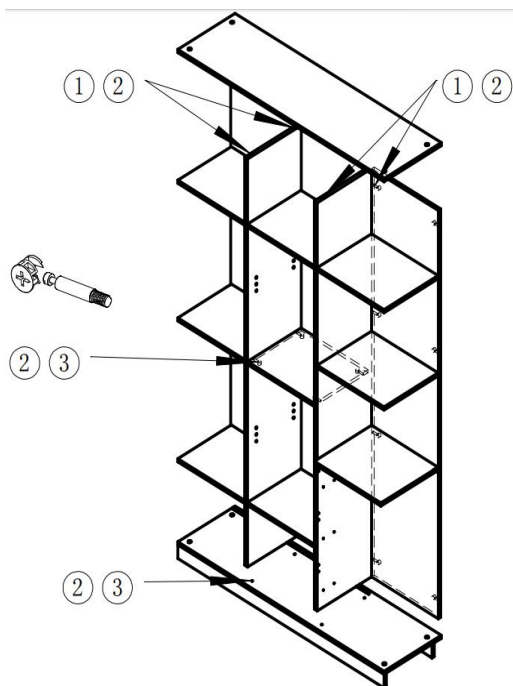


2.
  - a. The 8 and 10 are connected to the 1 with ②,①.
  - b. The 9,12,13 are connected to the 8 and 10 using ②,③.
  - c. The 24 is connected to the 10 with ② and ①, and then insert the 15.
  - d. The 7 adopts ②.① to connect the 8 and 10:

4.
  - a. The 11 is connected to the 2, 8,10 with ②.
  - b. Install ②③-A on the 6 and 10 using ⑨.

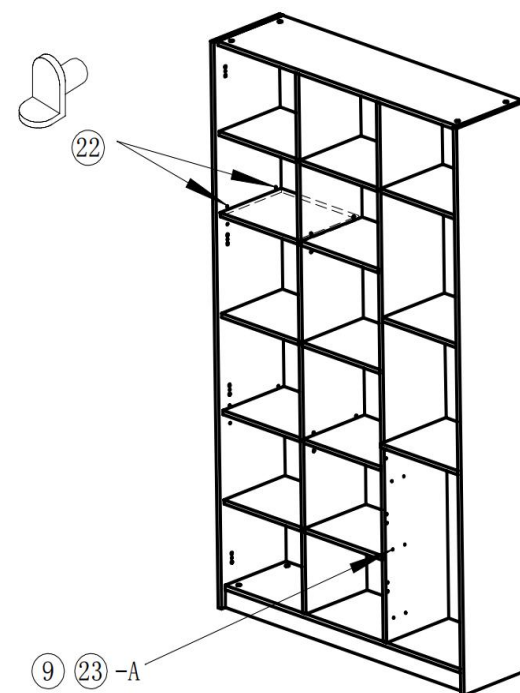


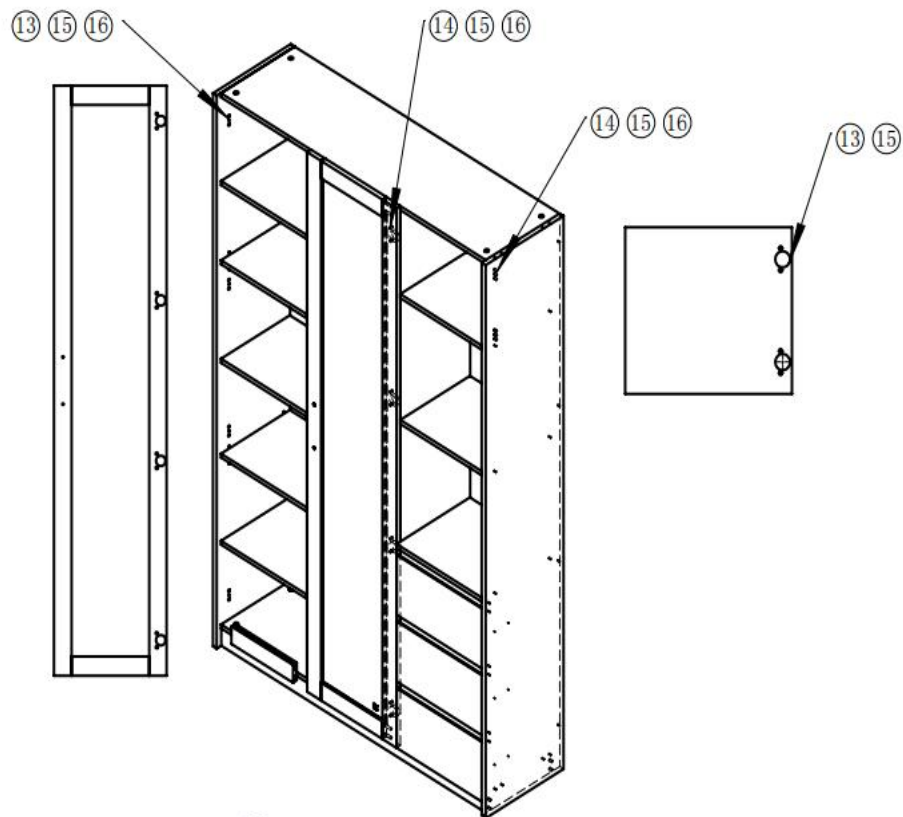


5,  
Each ⑬ installed in the corresponding position of the 21 and 23  
use two ⑮. (The 22 install ⑭)  
Each hinge are connected with the 2 and 6 by two ⑮ and ⑯.

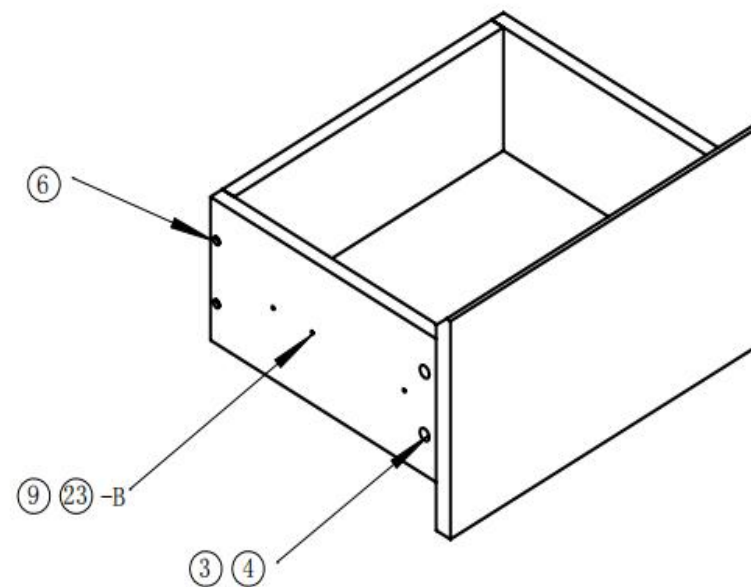

6,  
a. Using ⑨ to install ②③-B on the outside of the 16 and 17.  
b. The ④ and ③ are used to connect the 16, 17 and 20.  
And then insert the 19;  
c. The 16 and 17 are connect to the 18 with ⑥;

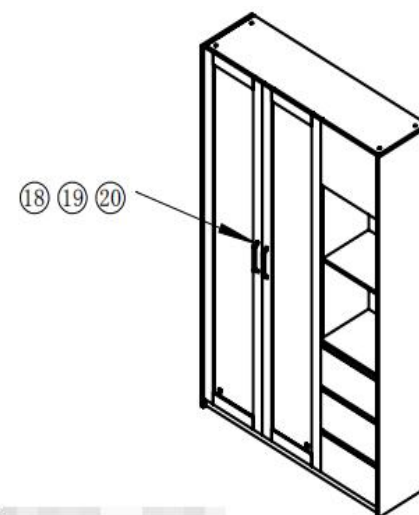



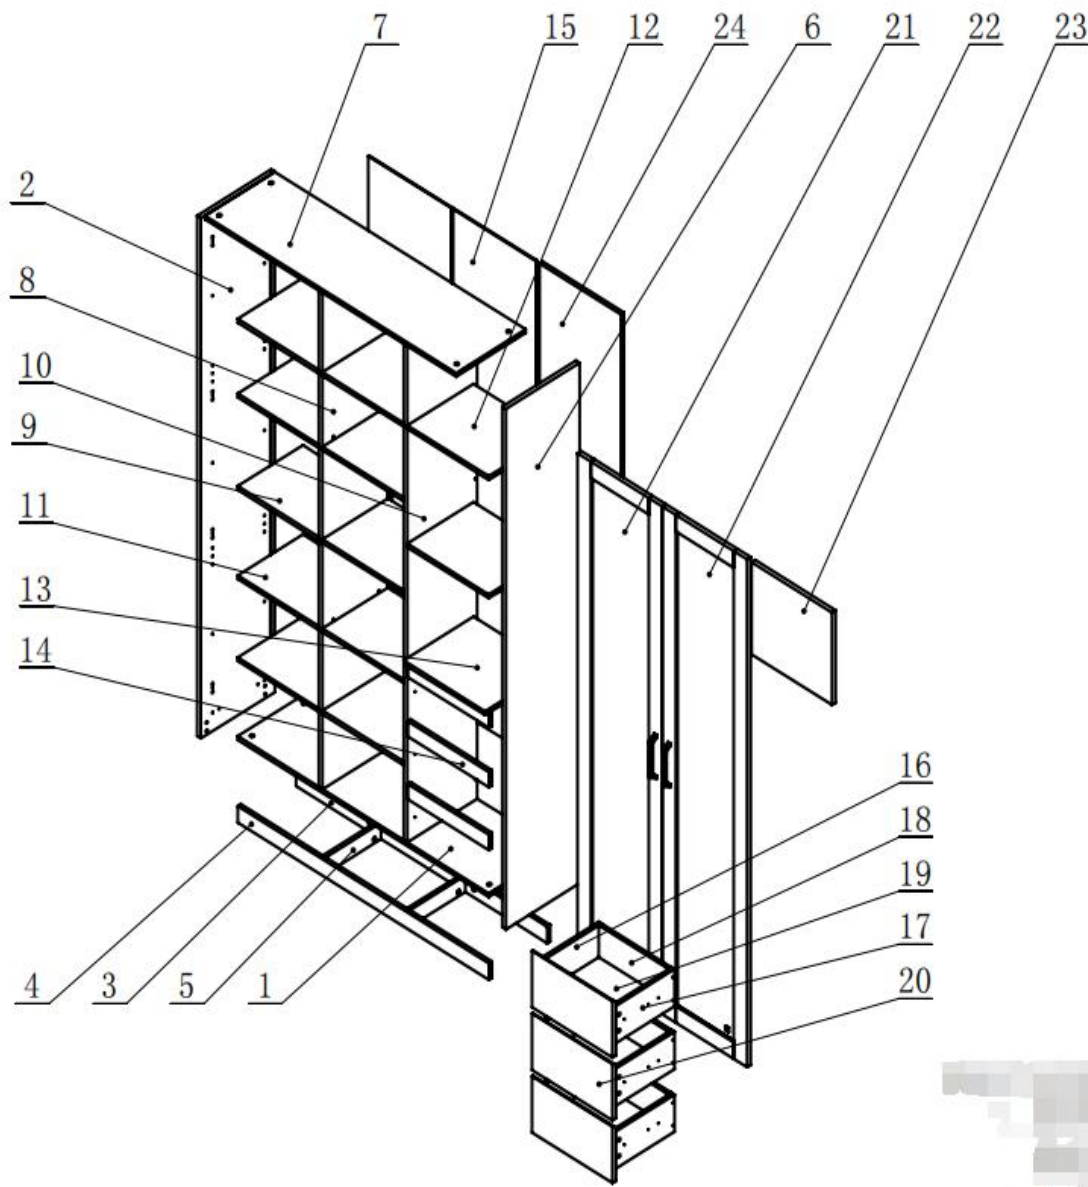




















7.  
The ⑱ adopts ⑲ and ⑳ to connect  
the 21 and 22.



Item	Name	Spec.	Qty
1	Base plate	1239X344	1
2	Left side plate	2050X364	1
3	Rear feet	1239X65	1
4	Front feet	1239X65	1
5	Short feet	273X65	6
6	Right side plate	2050X364	1
7	Top Plate	1239X344	1
8	Left latus inframedium	1954X344	1
9	Left grating	401X322	6
10	Right latus inframedium	1954X344	1
11	Adjustable grid plate	401X322	4
12	Grating	401X326	2
13	Right grating	401X344	1
14	Pulling strip	401X60	3
15	Soft backplane	1962X409	2
16	Left drawer side	300X146	3
17	Right drawer side	300X146	3
18	Drawer end	344X146	3
19	Drawer bottom	352X293	3
20	Drawer surface	397X222	3
21	Left door frame		1
22	Right door frame		1
23	Door panel	397X363	1
24	Hard backplane	1954X401	1

8、  
 Install the ② at the contact point between the door panel and the side plate.  
 Exposed hole paste ⑧,  
 Adjust the gap between door panels and Drawer surface to 2mm.

### Hardware List

No.	Name	Picture	Qty.	No.	Name	Picture	Qty.	No.	Name	Picture	Qty.
①	Large tapping buckle bar 34mm		64	⑨	M3.5*14 cross countersunk head tapping screw		50	⑰	Furniture glide		10
②	Large buckle wheel		80	⑩	Galvanized angle iron		2	⑱	Handle		2
③	Three-in-one Large tapping buckle bar		16	⑪	Expansion rubber plug		4	⑲	Cupped washer		4
④	Small tapping buckle bar		12	⑫	M4*30 cross countersunk head galvanized self-tapping nails		4	⑳	M4*25 cross flat head galvanized screw		4
⑤	Small buckle wheel		12	⑬	JGH-Q03 Fixed damping hinged pilot hole 48 cup diameter 35 Base 4 holes		6	㉑	Anti-collision adhesive		6
⑥	M3*30 cross countersunk head tapping screw		12	⑭	JGH-Q01 Solid damping Full cover hinged pilot hole 48 cup diameter 35 Base 4 holes		4	㉒	Chrome plated cylindrical partition nail rod		16
⑦	Wood tip		20	⑮	M4*12 cross flat head nickel plated screw		40	㉓	Sliding rail		3
⑧	Furniture sticker		92	⑯	M4*14 cross countersunk head self-tapping nails(nickeled)		20				