
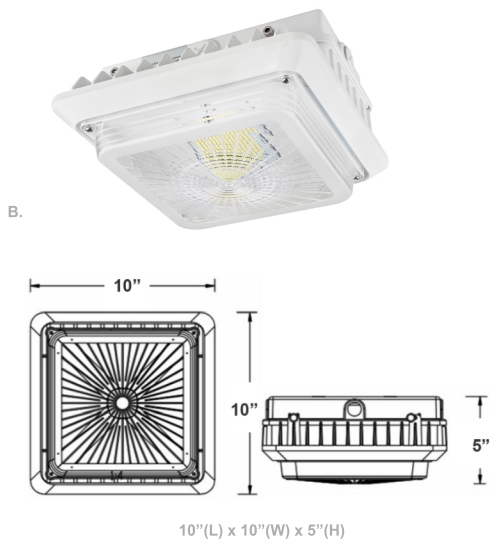


LED Garage/Canopy Lights

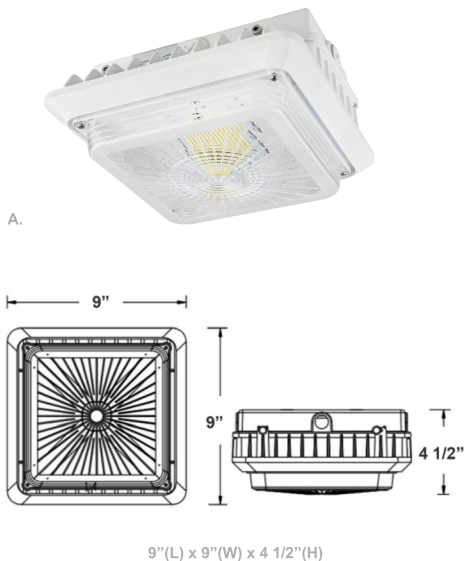

Wattage

40W / 55W / 75W / 100W

Voltage Input

120-277VAC 50/60Hz

Dimmable

0~10V Dimmable

Finish

Die-Cast Aluminum
Prismatic Polycarbonate Lens

Beam Angles



Color Temperatures



Features



Frosted Lens



Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.
CGL-40W-50K-D	A	CGL-75W-40K-D	B
CGL-40W-40K-D	A	CGL-100W-50K-D	C
CGL-55W-50K-D	A	CGL-100W-40K-D	C
CGL-55W-40K-D	B		
CGL-75W-50K-D	B		

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
25W	OPT-EM-FM1INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-95(BK/GR/SR/WH)	OPT-SEN-2MD-36	PROGRAMMABLE MICROWAVE (BI-LEVEL)
40W & 55W	OPT-EM-OD1INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-95(BK/GR/SR/WH)	WEC-3RC	OPTIONAL REMOTE CONTROL
75W & 100W	OPT-EM-OD2INT	INTERNAL	OPT-PC-B	BUTTON			
	OPT-EM-OD2INT	TAMPER RESISTANT SCREW					