


LED Construction / Temporary Lights




A.

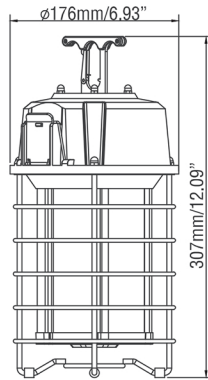

6.93"(D) x 12.09"(H)



B.

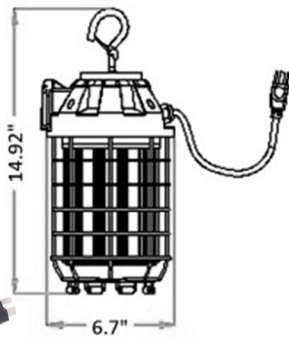

6.7"(D) x 14.92"(H)



C.

12.64" (L) x 6.96" (DIA)

Wattage

40W / 75W / 100W

Voltage Input

120-277VAC 50/60 Hz

Efficacy

120 LM/W

Finish

PC & Aluminum Housing

Beam Angles



360°

Color Temperatures



5000K

Features



Catalog No.	Fig.
CL-CONST-40W-50K	A.
CL-CONST-100W-50K	B.
CL-CONST-75W-50K	C.