

# CRLC SERIES COMMERCIAL INDOOR LIGHTING


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC4-20W-MCTP-SA-D  
CRLC4-20W-MCTP-SA-D-WH  
4" LED COMMERCIAL SQUARE & OPEN RECESSED LIGHT

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

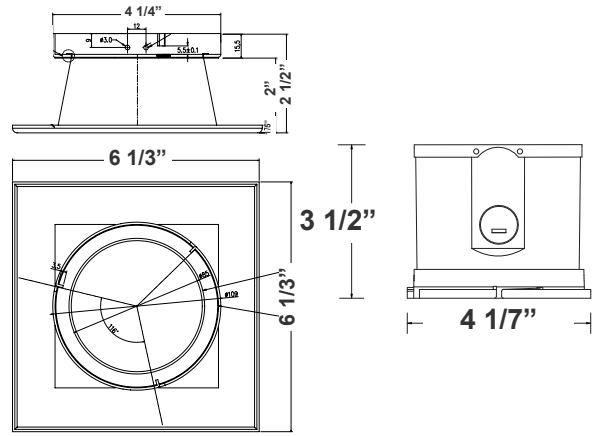

4" (H) X 6 1/3" (W)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

## Features

- 4" Haze & White Finish TRIM
- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 10W/15W/20W
- Power Factor: >0.90
- Efficacy: 86 LPW

### Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed To Operate In Temperatures 113°F
- No IC-Rated
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- Dimming: 0~10V Dimmable
- Total Lumens: 1720LM
- Color Temperature: 3000K/3500K/4000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

### Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

### Other Models:

- 20W | 1720LM | CRLC4-20W-MCTP-SA-D
- 20W | 1720LM | CRLC4-20W-MCTP-SA-D-WH






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-Z7-2D-2Z

## Photometrics: CRLC4-20W-MCTP-SA-D

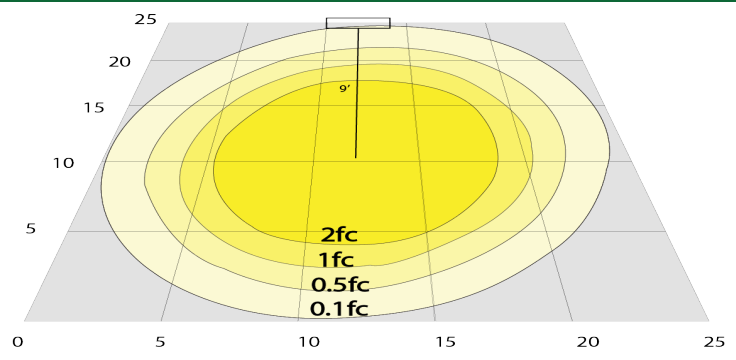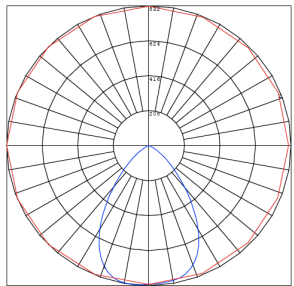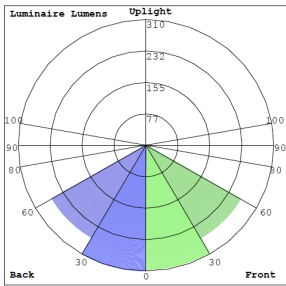

BUG Rating: B1-U1-G0

20W 5000K, Area 25" x 25" Mounting Height: 9'

## Other Views:

Hazel



CRLC-EGN-20W-MCTP-PD



CRLC-TRM-4SA



CRLC4-20W-MCTP-SA-D

White



CRLC-EGN-20W-MCTP-D



CRLC-TRM-4SA-WH



CRLC4-20W-MCTP-SA-D-WH

## Performance Table: CRLC4-20W-MCTP-SA-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-20W-MCTP-SA-D	10W	120-277V	860LM	3000K	B1-U1-G0	86
	15W		1290LM	3500K		
CRLC4-20W-MCTP-SA-D-WH	20W		1720LM	4000K		

## Sample Ordering

Model Watt Shape Dimming Housing

CRLC4 - 20W - MCTP - SA - D -

Blank  
WH = WHITE

### Accessory:

Blank = No Option For Accessories  
SSL4-RI = 4" SQUARE ROUGH-IN PLATE, 26" LONG

### Factory-Installed Option:

Blank = No Option For Accessories  
OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

### Accessory:



SSL4-RI  
4" SQUARE ROUGH-IN  
PLATE, 26" LONG



SSL4-RI  
26" (W) x 6 1/5" (H)

### Factory-Installed Option:



OPT-EM-HB1EXT  
EXTERNAL EMERGENCY  
BACK UP BATTERY

## Example:

- CRLC4-20W-MCTP-SA-D (FOR 20W CRLC4 MCTP 120-277V)
- CRLC4-20W-MCTP-SA-D OPT-EM-HB1EXT (FOR 20W CRLC4 MCTP 120-277V) (EXTERNAL EMERGENCY BACK UP BATTERY)

