


4" Square Trim LED Recessed Lights

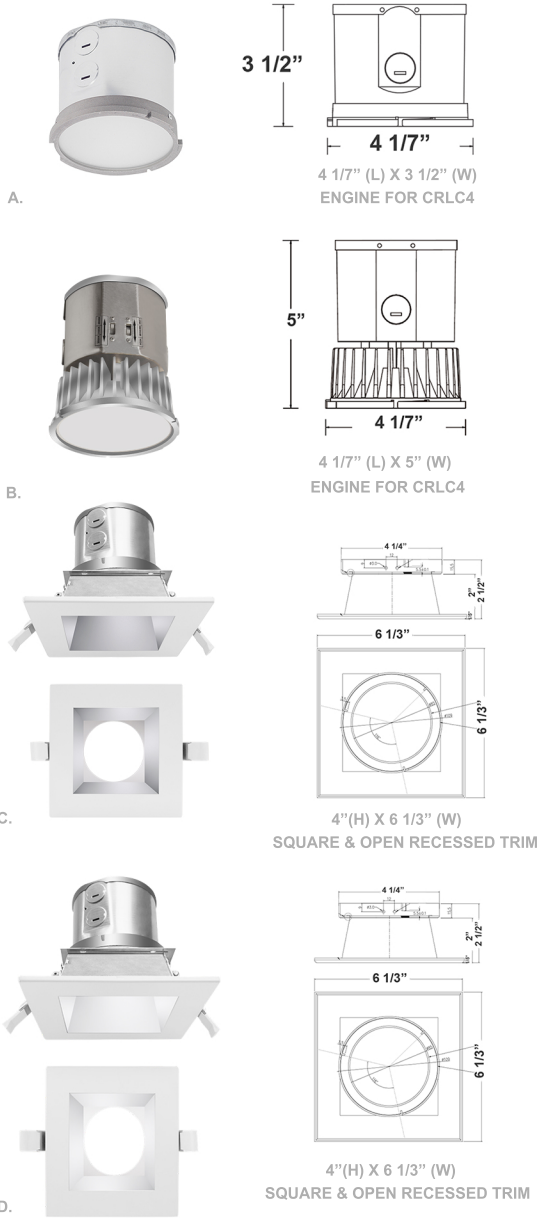

Wattage

10W / 15W / 20W / 40W

Voltage Input

120-277VAC
50/60Hz

Efficacy

80-86 LPW


Dimming

0-10V Dimmable

Finish

4" Haze & White Finish Trim
Recessed Mounting

Color Temperatures



Features



| Catalog No. | Fig. | Catalog No. | Fig. |
|---------------------|------|--------------------|------|
| CRLC-EGN-15W-30K-D | A. | CRLC4-15W-30K-S-D | C. |
| CRLC-EGN-15W-40K-D | A. | CRLC4-15W-40K-S-D | D. |
| CRLC-EGN-15W-50K-D | A. | CRLC4-15W-50K-S-D | C. |
| CRLC-EGN-15W-MCT-D | A. | CRLC4-15W-MCT-S-D | D. |
| CRLC-EGN-20W-50K-D | A. | CRLC4-20W-50K-S-D | C. |
| CRLC-EGN-20W-MCT-D | A. | CRLC4-20W-MCT-S-D | D. |
| CRLC-EGN-20W-MCTP-D | A. | CRLC4-20W-MCTP-S-D | C. |
| CRLC-EGN-40W-MCTP-D | B. | CRLC4-40W-MCTP-S-D | D. |

Factory-Installed Options

| Watts | EM Options | Description | Photocell | Description | Paint | Sensor | Description |
|-------|---------------|-------------|-----------|-------------|-------|--------|-------------|
| CRLC | OPT-EM-HB1EXT | N/A | N/A | N/A | N/A | N/A | N/A |