


## LED 5CCT Cloud Fixtures




A.

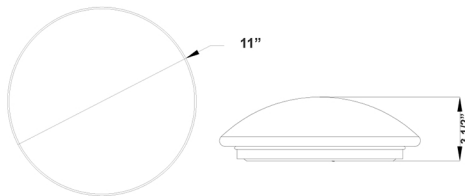

11" (W) x 3 1/2" (H)



B.

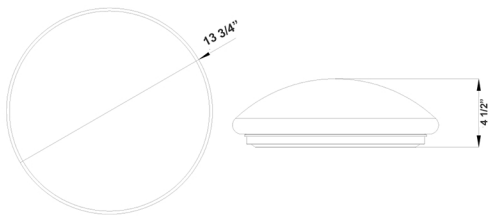

13 3/4" (W) x 4 1/2" (H)

**Wattage**

16W / 24W

**Voltage Input**120V AC  
60Hz**Efficacy**

75 LPW

**Dimming**Dimmable Down to 10% Using Standard TRIAC  
LED Dimmer**Finish**White Translucent Acrylic Lens  
Spun Stainless Steel  
Brushed Nickel Finish**Color Temperatures****Features**
**Factory-Installed Options**

| Catalog No. | Fig. |
|-------------|------|
| FCR-11-MCT5 | A.   |
| FCR-14-MCT5 | B.   |

| Watts          | EM Option    | Description | Photocell         | Description              | Paint | Sensor                                    | Description   |
|----------------|--------------|-------------|-------------------|--------------------------|-------|---|---|
| FCR-11         | OPT-EM-FCR11 | INTERNAL    | OPT-PC-FM         | BUTTON W/ AUXILIARY BASE | N/A   | OPT-SEN-2US<br>INTERNAL FOR<br>ALL MODELS | ULTRASONIC BI-LEVEL<br>DIMMING<br>(REMOTE NOT NEEDED) |
| FCR-14         | OPT-EM-FCR14 | INTERNAL    |                   |                          |       |   |   |
| FCR11, FCS11HL | OPT-EM-FCS11 | INTERNAL    | 277V Option       |                          |       | OPT-SEN-2USRC                             | REMOTE CONTROL  |
| FCS14          | OPT-EM-FCS14 | INTERNAL    | OPT-277V-FCR-11   | EXTERNAL BOX             |       |   |   |
| FS13           | OPT-EM-FCS13 | INTERNAL    | OPT-277V-FCS-11   | EXTERNAL BOX             |       |   |   |
|                |              |             | OPT-277V-FCS-11HL | EXTERNAL BOX             |       |   |   |
|                |              |             | OPT-277V-FCS-13   | EXTERNAL BOX             |       |   |   |