## FLD3 SERIES OUTDOOR LIGHTING


FLD3-13W-MCT-D-KN

3RD GENERATION 3CCT FLOOD HEAD WITH PHOTOCELL



Multi Color Temperature (Selectable)






**Customer Name:** 

Project Name:

Note:



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

4"(H) x 6 1/3"(W) x 4"(D)

Type:

## eatures

- Die-cast Aluminum Housing with Powder Coat Finish (Dark •
- 1/2" Threaded Knuckle Stem

- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## **Technical Specifications**

#### **Electrical:**

Voltage: 120-277V Power Factor: >0.9 Wattage: 13W Efficacy: 140 LPW

#### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

#### Lighting:

- Multi CCT: Selectable Multi-CCT Switches On The Back Of the fixture
- Dimming: 0-10V Dimming
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 1820LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 70,000 Hrs.

### **Applications:**

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

#### Other Models:

25W | 3500LM | FLD3-25W-MCT-D-KN
















### Photometrics: FLD3-13W-D-KN





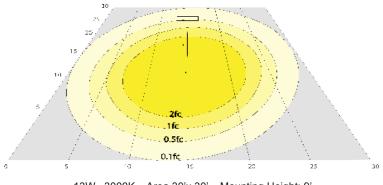

BUG Rating: B1-U1-G0

13W 3000K, Area 30'x 30' Mounting Height: 9'

#### **Other Views:**







Side View

Front View

Lens View

## Performance Table: FLD3-13W-MCT-D-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLD3-13W-MCT-D-KN	13W	120-277V	1820LM	3000K 4000K 5000K	B1-U1-G0	140

# Sample Ordering

Model	Watt	Color Temp.	Dimming	Mounting
FLD2	<b>–</b> 13W	_ MCTP _	D -	KN



