




# Small X-Gen Bullet Flood Lights




A.

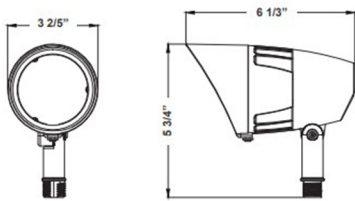

5 3/4" (H) x 6 1/3" (W) x 3 2/5" (D)



B.

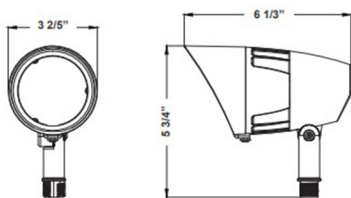

5 3/4" (H) x 6 1/3" (W) x 3 2/5" (D)

## Wattage

15W

## Voltage Input

120-277V

## Dimmable

0-10V Dimming


## Finish

Die-cast Aluminum Housing with Powder Coat Finish  
Bronze / Black

## Beam Angles



## Color Temperatures



## Features



## Shroud Accessory



FLDX-FS-SM  
X-Gen Bullet Replacement  
Flat Shroud

Catalog No.	Fig.	Catalog No.	Fig.
FLDX-SM-15W-30K-BR	A.	FLDX-SM-15W-40K-BK	B.
FLDX-SM-15W-30K-BK	B.	FLDX-SM-15W-50K-BR	A.
FLDX-SM-15W-40K-BR	A.	FLDX-SM-15W-50K-BK	B.