
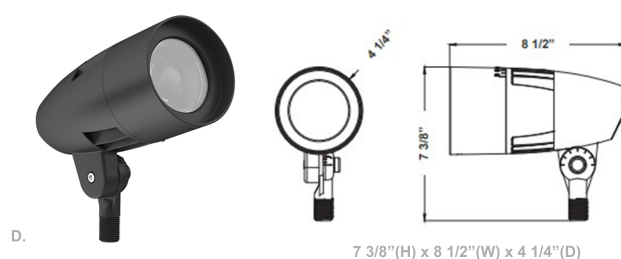
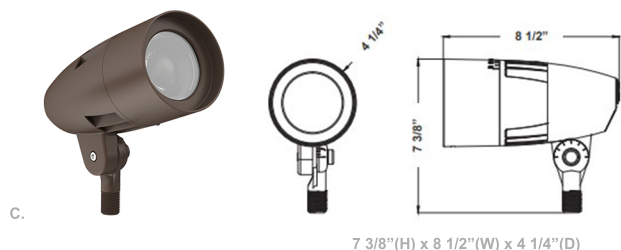
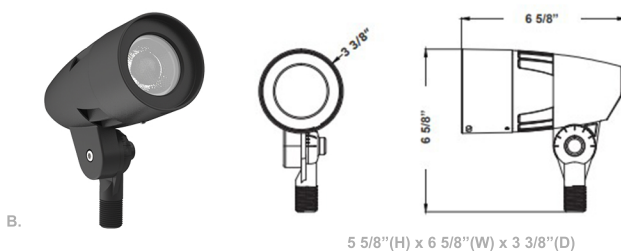


# Power CCT & Beam Angle Adjustable Flood Lights

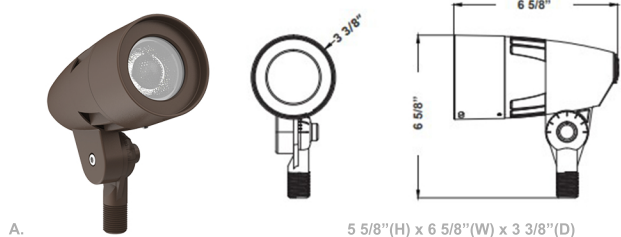

**Wattage**  
5W / 10W / 15W / 20W / 30W

**Voltage Input**  
120-277V

**Dimmable**  
0-10V Dimming

**Finish**  
Die-cast Aluminum Housing with Powder Coat Finish  
Bronze / Black

**Beam Angles**  
 25° - 65°

**Color Temperatures**  
 3000K 4000K 5000K

**Features**

**Adjustable**  
 **Beam Adjustable**  
25°-65° Rotating Lens

Catalog No.	Fig.
FLDXPRO-SM-5-15W-MCTPB-BR	A.
FLDXPRO-SM-5-15W-MCTPB-BK	B.
FLDXPRO-MD-10-30W-MCTPB-BR	C.
FLDXPRO-MD-10-30W-MCTPB-BK	D.