


Weatherproof LED Square Flood Heads




A.

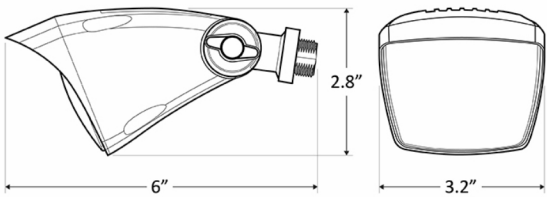

6"(L) x 2 4/5"(H) x 3 1/5"(W)



B.

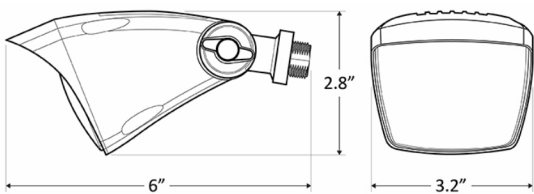

6"(L) x 2 4/5"(H) x 3 1/5"(W)

Wattage

10W

Voltage Input

120-277V AC, 50/60Hz

Efficacy

100 LM/W


Dimming

0~10V Dimmable

Finish

Die-Cast Aluminum with Powder Coat Finish
White Reflector
Dark Bronze / White

Beam Angles



Color Temperatures



Features



Catalog No.	Fig.	Catalog No.	Fig.
FLH-10W-30K-BR	A.	FLH-10W-30K-WH	B.
FLH-10W-50K-BR	A.	FLH-10W-50K-WH	B.