



LED Dome Flush Mount




A.




B.




C.




D.



E.



F.



Wattage

20W / 24W

Voltage Input

120V AC
60Hz

Efficacy

75 LPW


Dimming

Dimmable Down to 10% Using Standard TRIAC LED Dimmer

Finish

White Translucent Acrylic Optic Lens
White / Oil-Rubbed Bronze / Brushed Nickel Finish

Color Temperatures

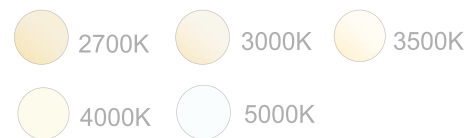

Features



Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.
FMD-11-MCT5-BN	A.	FMD-13-MCT5-BN	D.
FMD-11-MCT5-ORB	B.	FMD-13-MCT5-ORB	E.
FMD-11-MCT5-WH	C.	FMD-13-MCT5-WH	F.

Watts	EM Option	Description	Photocell	Description	Paint	Sensor	Description
FMD-11	OPT-EM-FCR11	INTERNAL	N/A	N/A	N/A	OPT-SEN-2US	ULTRASONIC BLEVEL DIMMING (REMOTE NOT NEEDED)
FMD-13	OPT-EM-FCR11	INTERNAL				OPT-SEN-2USRC	OPTIONAL RC