


# Decorative Flush Mount Surface Fixtures

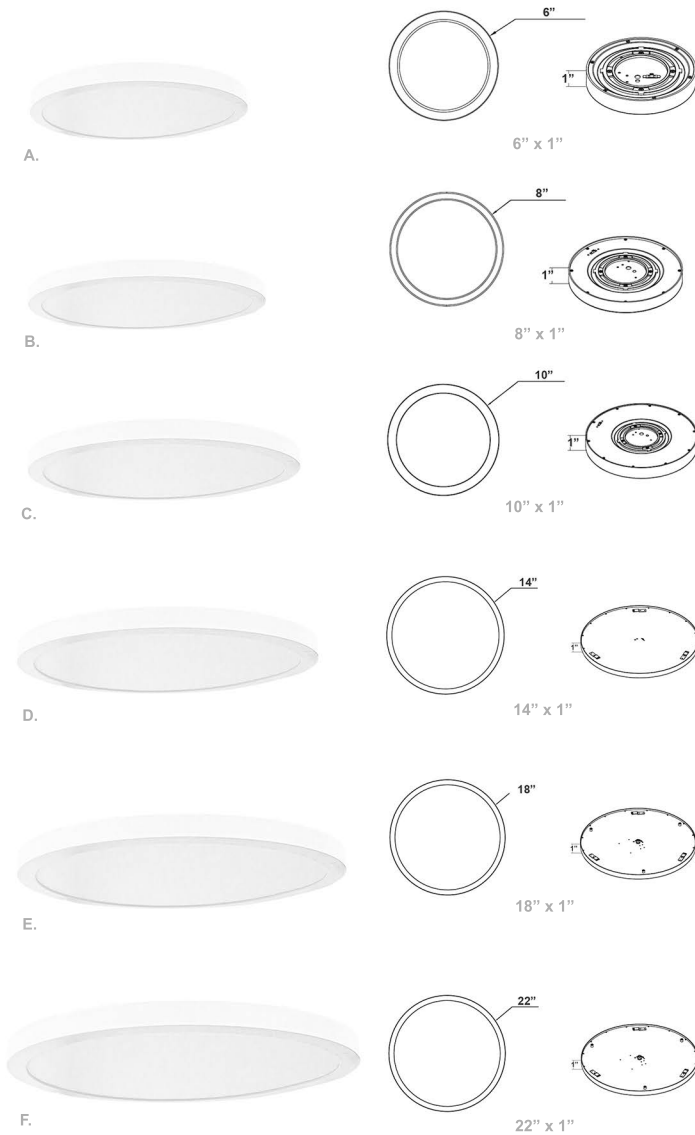

### Wattage

11W / 14W / 15W / 17W / 26W / 30W / 45W

### Voltage Input

120V AC

### Efficacy

60 LPW


### Dimming

Dimming Using Standard TRIAC LED Dimmers

### Finish

Die-cast Aluminum Powder-Coated White Finish

### Color Temperatures



### Features



### Accessory



**FML-RK-712**  
7 1/2" Rod Kit for  
18" & 22" FML



**FML-SK6**  
6" Adjustable Suspension  
Cable w/ Canopy & Power  
Cord

### Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.	Watts	EM Option	Description	Photocell	Description	Paint	Sensor	Description
FML-R6-MCT	A.	FML-R14-MCT	D.	FML-R6	OPT-EM-DLS6	MOUNT IN EXTENDED BASE	OPT-PC-FML8	BUTTON	N/A	N/A	N/A
FML-R8-MCT	B.	FML-R18-MCT	E.	FML-R8	OPT-EM-FML-R8	MOUNT IN EXTENDED BASE	OPT-PC-FML10	BUTTON	N/A	N/A	N/A
FML-R10-MCT	C.	FML-R22-MCT	F.	FML-R10	OPT-EM-FML-R10	MOUNT IN EXTENDED BASE	277V Option Description				
				FML-R14	OPT-EM-FML-R14	MOUNT IN EXTENDED BASE	OPT-277V-FM-R8	EXTERNAL BOX			
							OPT-277V-FML-R10	EXTERNAL BOX			