



LED 5CCT Single Ring Flush Mount




A.



B.



C.



Wattage

16W / 20W / 24W

Voltage Input

120V AC

Efficacy

75 LPW


Dimming

Dimmable Down to 10% Using Standard TRIAC LED Dimmer

Finish

White Translucent Acrylic Lens
Spun Stainless Steel
Brushed Nickel Finish

Color Temperatures

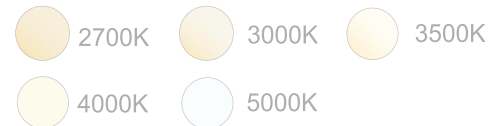

Features



Factory-Installed Options

Catalog No.	Fig.
FSL-11-MCT5	A.
FSL-13-MCT5	B.
FSL-15-MCT5	C.

Watts	EM Option	Description	Photocell	Description	Paint	Sensor	Description
FCR-11	OPT-EM-FCR11	INTERNAL	OPT-PC-FM	BUTTON W/ AUXILIARY BASE	N/A	OPT-SEN-2US INTERNAL FOR ALL MODELS	ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED)
FCR-14	OPT-EM-FCR14	INTERNAL					
FCR11, FCS11HL	OPT-EM-FCS11	INTERNAL	277V Option			OPT-SEN-2USRC	REMOTE CONTROL
FCS14	OPT-EM-FCS14	INTERNAL	OPT-277V-FCR-11	EXTERNAL BOX			
FS13	OPT-EM-FCS13	INTERNAL	OPT-277V-FCS-11	EXTERNAL BOX			
			OPT-277V-FCS-11HL	EXTERNAL BOX			
			OPT-277V-FCS-13	EXTERNAL BOX			

WESTGATE MFG
Order at:
TEL: 877.805.2252 FAX: 877.809.2252
ORDERS@WESTGATEMFG.COM