


# 7" Modern Lucite Post Top



A.

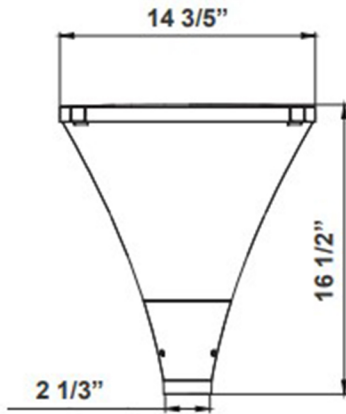

14 3/5"(W) x 16 1/2"(H)  
Inside Diameter: 2-1/3"

### Wattage

18W / 30W / 45W / 60W

### Voltage Input

120-277VAC

### Efficacy

140 LPW

### Dimming

0~10V Dimmable

### Finish

Die-Cast Aluminum with Powder Coat Finish  
Black

### Beam Angles



360°

### Color Temperatures



### Features



### Factory-Installed Options

Catalog No.	Fig.	Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
GPL-18-60W-MCTP	A.	GPL	OPT-EM-OD1NT	INTERNAL	OPT-PC-B	BUTTON	OPT-CRL-95(BK/GR/SR/WH)	OPT-SEN-WMC	PROGRAMMABLE MICROWAVE (BI-LEVEL)