



Gas Station Canopy Lights

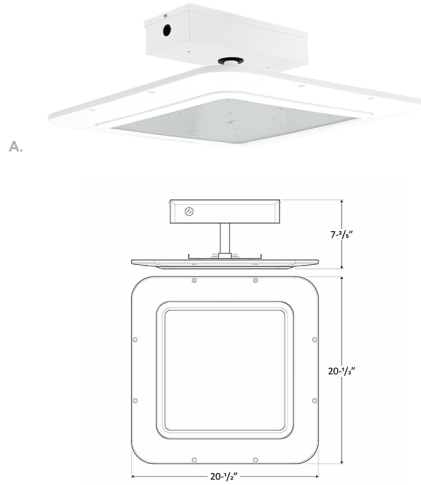


A.



20 1/2"(W) x 20 1/2"(H) x 7 2/5"(D)



B.



20 1/2"(W) x 20 1/2"(H) x 7 2/5"(D)

Wattage

80W / 100W / 120W / 150W

Voltage Input

120-277VAC / 50-60 Hz

Efficacy

140 LM/W


Beam Angle



Finish

ADC12 Aluminum Alloy
Outdoor Powder Coated

Color Temperatures



Features



Factory-Installed Options

Catalog No.	Fig.
GSX-SRFC-80-150W-50K	A.
GSX-RECS-80-150W-50K	B.

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
25W	OPT-EM-FM1INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-95(BK/GR/SR/WH)	OPT-SEN-2MD-36	PROGRAMMABLE MICROWAVE (BI-LEVEL)
40W & 55W	OPT-EM-OD1INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-95(BK/GR/SR/WH)	WEC-3RC	OPTIONAL REMOTE CONTROL
75W & 100W	OPT-EM-OD2INT	INTERNAL	OPT-PC-B	BUTTON			
	OPT-EM-OD2INT	TAMPER RESISTANT SCREW					