


HPL SERIES Industrial Lighting

HPL-24W-30K-E26
HPL-24W-50K-E26



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

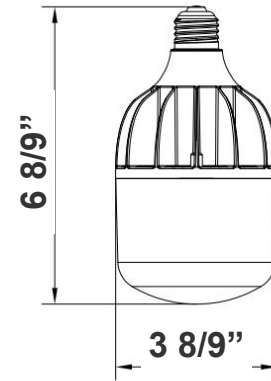

6 8/9"(H) x 3 8/9"(W)

Ideal for Retrofitting Existing HID High Bay, It Can Be Used in Enclosed Luminaires.

Features

- Lamp Base: E26 Medium Base
- 5-Year Warranty
- Plastic Housing
- 50,000 Hours Rated Life

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 24W
- Power Factor: >0.9
- THD: ≤25%
- Efficacy: 125 LPW

Lighting:

- Lens: PC Lens
- Total lumens: 3000LM
- Color temperature: 3000K/5000K
- Color rendering index: >80
- Beam Angle: 200°
- 50,000 Hours Rated Life

Mechanical:

- Plastic Housing
- No fan housing (New Technology)
- Lamp Base: E26 Medium Base
- Operating temperature: -4°F ~ 122°F
- Do not use the lamps in enclosed fixtures
- Suitable for damp location
- 5-Year Warranty

Applications:



- Ideal for Retrofitting Existing HID High Bay, It Can be Used in Enclosed Luminaires

Other Models:


- 16W | 2000LM | HPL-16W-30K-E26
- 32W | 4000LM | HPL-32W-30K-E26
- 40W | 5000LM | HPL-40W-30K-E26
- 16W | 2000LM | HPL-16W-50K-E26
- 32W | 4000LM | HPL-32W-50K-E26
- 40W | 5000LM | HPL-40W-50K-E26



Photometrics: HPL-24W-E26



BUD Rating: B1-U3-G2

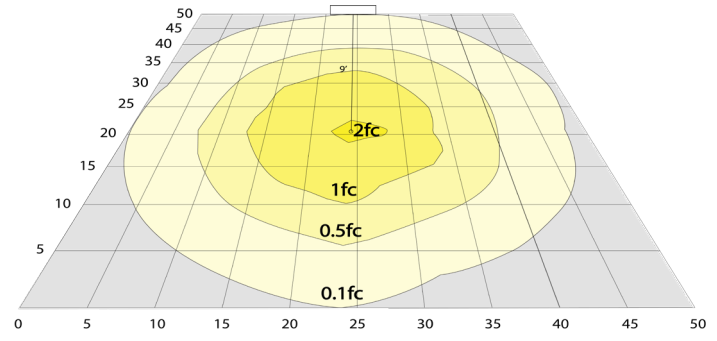

24W, 5000K Area 50'x 50' Mounting Height: 9'

Performance Table: HPL-24W-E26

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
HPL-24W-30K-E26	24W	120~277V	3000LM	3000K	B1-U3-G2	125
HPL-24W-50K-E26	24W	120~277V	3000LM	5000K	B1-U3-G2	125

Sample Ordering

Model Wattage Color Temp. Base

HLP - 24W - - E26

30K = 3000K
50K = 5000K

Accessory:

Blank = No Option For Accessories

E26-ENLARGER = ENLARGES E26 BULB TO BE USED IN E39 SOCKET

ACCESSORY:



E26-ENLARGER

Example:

- HPL-24W-30K-E26 (FOR HPL 24W FIXTURE 120-277V)
- HPL-24W-30K-E26 (FOR HPL 24W FIXTURE 120-277V)
E26-ENLARGER (ENLARGES E26 BULB TO BE USED IN E39 SOCKET)

