# LCFB SERIES RESIDENTIAL LIGHTING



TRIPLE LINEAR, INTEGRATED 3 LIGHT LED CYLINDER GLASS LINEAR PENDANT




Integrated LED glass pendant is a contemporary and stylish design that can be used by itself as an accent piece, or grouped together to light a kitchen island, bar, or pool table.



Customer Name:

Project Name:

Note: Type:



55" x 27 2/3"

## **Features**

- Multi CCT (Selectable Switch on the LED Board under the lens)
- Brushed Nickel Finish

- 5-Year Warranty
- Glass lens

Selection:

Triple With Straight Bar

## **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC 50/60Hz

Wattage: 36WPower Factor: >0.90Efficacy: 68 LPW

#### Mechanical:

- Brushed Nickel Finish
- Glass Material: 5/64" (2mm) thickness, Ultra Clear Glass
- Power Cord is 40" Long
- Maximum Ambient Temperature: -22°F to 104°F
- IP20 indoor only

### Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 2430LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on back of the fixture )
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 120°
  Rated life: 50.000 Hrs

## Applications:

 Integrated LED glass pendant is a contemporary and stylish design that can be used by itself as an accent piece, or grouped together to light a kitchen island, bar, or pool table.

#### Other Models:

• 12W | 810LM | LCFB-1L-MCT5

• 36W | 2430LM | LCFB-3LR-MCT5
















### Photometrics: LCFB-3LS-MCT5





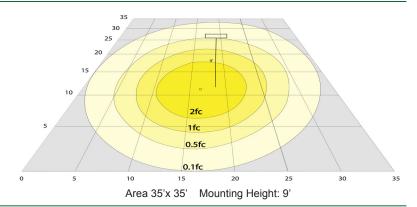

BUG Rating: B1-U1-G0

DOG Natility. D 1-0

**Other Views:** 







Glass Lens View

Top View

Performance Table: LCFB-3LS-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCFB-3LS-MCT5	36W	120V	2430LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K	B1-U1-G0	68

## Sample Ordering

Model Light Color Temp.

LCFB = 3LS = MCT5

#### **Example:**

1. LCFB-3LS-MCT5

(FOR LCFB 36W MCT5 FIXTURE 120V)

## Other Model: LCFB-1L-MCT5







Front View

Top View



