



Small Flood Lights with U Bracket

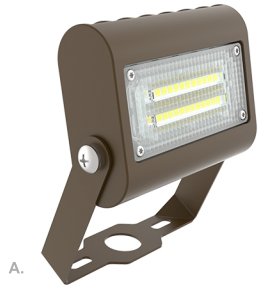


A.

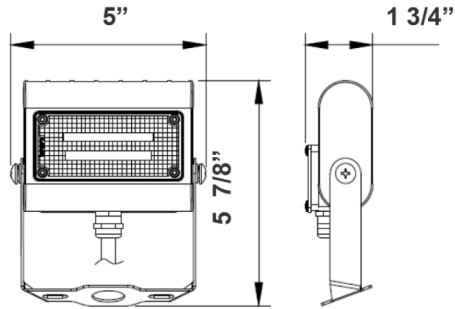

5 7/8"(H) x 5"(W) x 1 3/4"(D)




B.

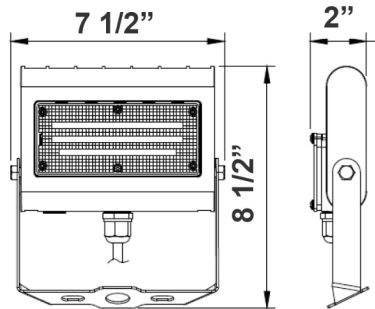

8 1/2"(H) x 7 1/2"(W) x 2"(D)



C.

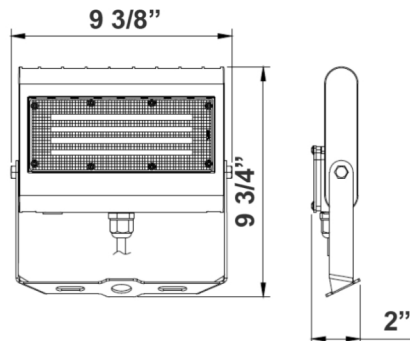

9 3/4"(H) x 9 3/8"(W) x 2 7/8"(D)

Wattage

10W / 15W / 20W / 30W

Voltage Input

120-277V AC/50-60 Hz

Efficacy

130 LPW

Dimming

0~10V Dimmable


Finish

Die-Cast Aluminum with Powder Coat Finish
Dark Bronze

Beam Angles



Color Temperatures



Features



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
LFX-XS-15W-30K-TR	A.	LFX-SM-10-30W-30K-TR	B.	LFX-MD-15-50W-50K-TR	C.
LFX-XS-15W-40K-TR	A.	LFX-SM-10-30W-50K-TR	B.	LFX-SM-10-30W-MCTP-TR	C.
LFX-XS-15W-50K-TR	A.	LFX-MD-15-50W-30K-TR	C.	LFX-MD-15-50W-MCTP-TR	C.

Factory-Installed Options

Watts	EM Option	Description	Photocell	Description	Paint	Sensor	Description
LFX-MD-KN & LFX-MD-TR	N/A	N/A	OPT-PC-BUM	BUTTON	N/A	N/A	N/A