


# Power & CCT Adjustable Flood/Area Lights

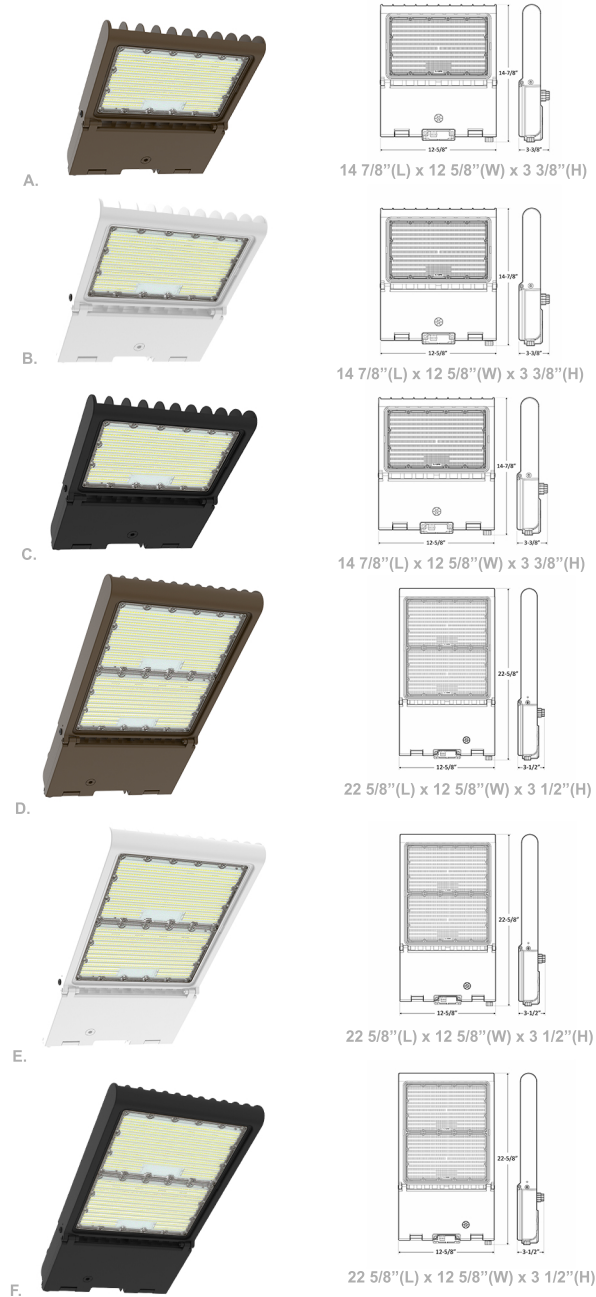

### Wattage

50W / 80W / 100W / 150W / 200W / 240W / 300W

### Voltage Input

100-277V AC 50/60Hz

### Efficacy

125 LPW


### Dimming

0~10V Dimmable


### Finish

Die-Cast Aluminum with Powder Coat Finish  
Dark Bronze / White / Black

### Beam Angles



### Color Temperatures

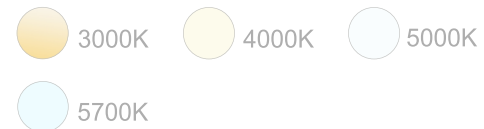

### Features



Catalog No.	Fig.	Catalog No.	Fig.
LFXPRO-LG-50-150W-MCTP	A.	LFXPRO-XL-150-300W-MCTP	C.
LFXPRO-LG-50-150W-MCTP-WH	B.	LFXPRO-XL-150-300W-MCTP-WH	D.
LFXPRO-LG-50-150W-MCTP-BK	C.	LFXPRO-XL-150-300W-MCTP-BK	D.