




LED Outdoor Sign Lights

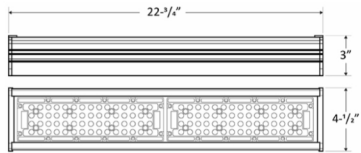

22 3/4"(L) x 3"(H) x 4 1/2"

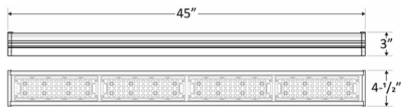

45"(L) x 3"(H) x 4 1/2"(W)

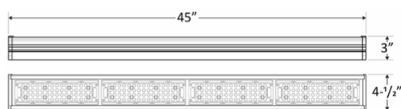

45"(L) x 3"(H) x 4 1/2"(W)

Wattage

50W / 120W

Voltage Input

120-277V, 50/60Hz AC

Efficacy

125-130 LPW

Finish

Die-Cast Aluminum with Powder Coat Finish
Black / White

Beam Angles




Color Temperatures



Features



Accessories



LOHB-C-WH
Surface/coiling mounting
conversion bracket (set of 2)



LOHB-C
Surface/coiling mounting
conversion bracket (set of 2)



LOHB-H-2FT
2FT mounting bracket
Hot-rolled steel

Catalog No.	Fig.	Catalog No.	Fig.
LOHB-2FT-50W-30K	A.	LOHB-4FT-120W-50K	B.
LOHB-2FT-50W-50K	A.	LOHB-4FT-120W-30K-WH	C.
LOHB-4FT-120W-30K	B.	LOHB-4FT-120W-50K-WH	C.