


LED Backlit Panel Light




A.

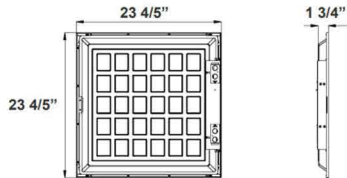

23 4/5" (L) x 23 4/5" (H) x 1 3/4" (D)




B.

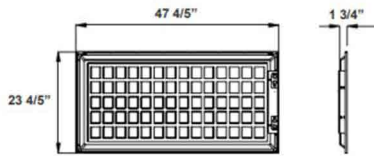

47.8" (L) x 23 4/5" (H) x 1 3/4" (D)



C.

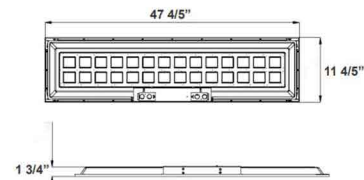

47 4/5" (L) x 11 4/5" (H) x 1 3/4" (D)

Wattage

20W / 30W / 40W / 50W / 60W

Voltage Input

120-277V AC 50/60Hz

Efficacy

100-110 LPW

Dimming

0~10V Dimmable

Finish

ADC12 Aluminum Heat Sink, Outdoor Powder Coating
White

Beam Angles



110°

Color Temperatures



Features



Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
LPNG-2X2-4KLM-40K-D	A.	LPNG-2X4-5KLM-40K-D	B.	LPNG-2X4-6KLM-27K-D	B.
LPNG-2X2-4KLM-35K-D	A.	LPNG-2X4-5KLM-35K-D	B.	LPNG-2X4-7KLM-50K-D	B.
LPNG-2X2-4KLM-27K-D	A.	LPNG-2X4-5KLM-27K-D	B.	LPNG-2X4-7KLM-40K-D	B.
LPNG-2X2-MCTP	A.	LPNG-2X4-MCTP	B.	LPNG-2X4-7KLM-35K-D	B.
LPNG-2X2-MCTP4	A.	LPNG-2X4-MCTP4	B.	LPNG-2X4-7KLM-27K-D	B.
LPNG-2X4-4KLM-50K-D	B.	LPNG-2X4-6KLM-50K-D	B.	LPNG-1X4-4KLM-50K-D	C.
LPNG-2X4-4KLM-40K-D	B.	LPNG-2X4-6KLM-40K-D	B.	LPNG-1X4-4KLM-27K-D	C.
LPNG-2X4-5KLM-50K-D	B.	LPNG-2X4-6KLM-35K-D	B.	LPNG-1X4-MCTP	C.
				LPNG-1X4-MCTP4	C.

Watts	EM Options	Description	Plug-In Cord	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-LP	EXTERNAL	OPT-FWH-63	6FT 3-WIRE WHIP	OPT-CLR-LPNG	OPT-SEN-2MDR	PROGRAMMABLE MICROWAVE (B-LEVEL)
	Plug In Cord	Description	OPT-FWH-65	6FT 5-WIRE WHIP		WEC-3RC	REMOTE CONTROL
	OPT-HBC-125TL-BK	8FT,15A,125V,BLACK	OPTY-FWH-66	6FT 6-WIRE WHIP			
	OPT-HBC-277TL-BK	8FT,15A,125V,BLACK					
	OPT-HBC-125SB-BK	10FT,15A,125V,19/3STR,B					

WESTGATE MFG
Order at:
TEL: 877.805.2252 FAX: 877.809.2252
ORDERS@WESTGATEMFG.COM