


# LRS SERIES Outdoor Lighting

LRS-G-MCT-C90-BK

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

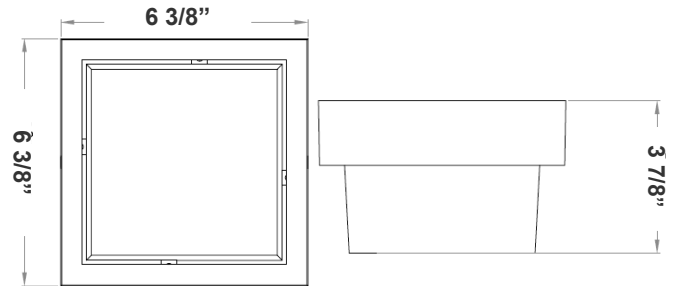

6 3/8" (L) x 6 3/8" (W) x 3 7/8" (H)

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

## Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

### Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

### Lighting:

- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

### Applications:

- LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

### Other Models:

- 12W | 650LM | LRS-G-MCT-C90-WH
- 12W | 650LM | LRS-G-MCT-C90-MGBR




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co




WG-ZY-29-2Z

**Photometrics:** LRS-G-MCT-C90-BK

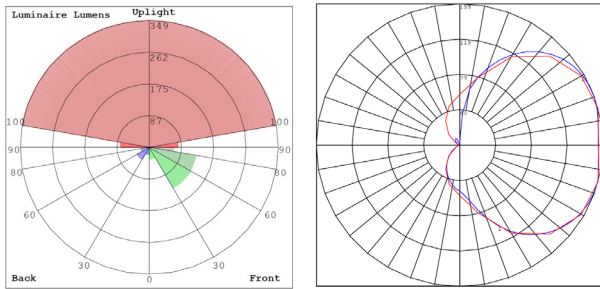

BUG Rating: B0-U3-G1

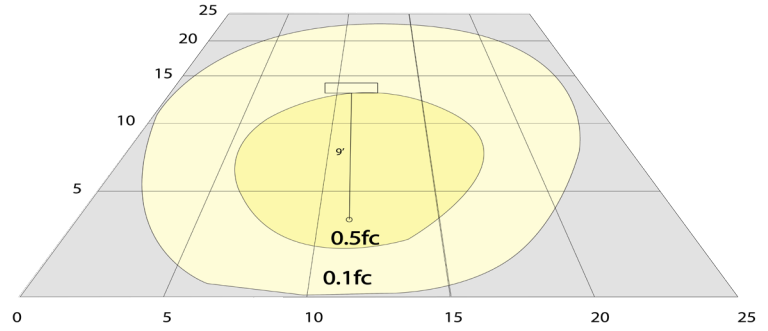

Area 25'x 25' Mounting Height: 9'


**Other Views:**



Side View



Front View



Back View

**Performance Table:** LRS-G-MCT-C90-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-G-MCT-C90-BK	12W	120V	650LM	3000K 4000K 5000K	B0-U3-G1	54

**Sample Ordering**

Model	Color Temp.	CRI	Housing
LRS - G - MCT - C90 - BK			

**Other Models:**



LRS-G-MCT-C90-MGBR



LRS-G-MCT-C90-WH

