LRS SERIES Outdoor Lighting



5"

۲

Type:

6"(L) x 6"(W) x 5"(H)

LRS-J-MCT-C90-BN





ő

LED Wall Pack with double-walled clear/frosted lens is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

eatures

- Back Plate: Die-cast aluminum
- Polycarbonate Lens

- 7-Year Warranty
- Multi CCT Switch Is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 20W
- Power Factor: >0.90
- Efficacy: 70 LPW •

Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- IP44, Suitable For Wet Location
- 7-Year Warranty

Lighting:

- LED Type: SMD 3030
- Total Lumens: 1400LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: $CRI \ge 90$
- Beam Angle: 90° x 110°
- Rated Life: 70.000 Hrs

Applications:

LED Wall Pack With Double-Walled Clear/Frosted Lens Is Ideal For General Site Lighting, Loading Docks, Doorway, Pathway And Parking Areas.

Other Models:

• 20W | 1400LM | LRS-J-MCT-C90-BK • 20W | 1400LM | LRS-J-MCT-C90-BR






Customer Name: Project Name:

6"

Note:

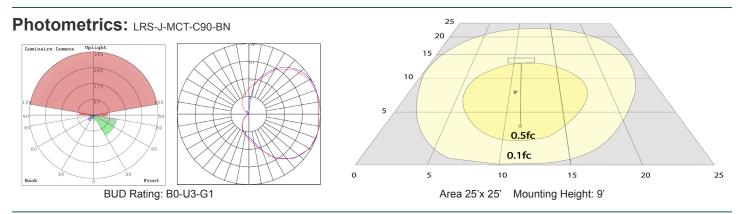

Performance Table: LRS-J-MCT-C90-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-J-MCT-C90-BN	20W	120V	1400LM	3000K 4000K 5000K	B0-U3-G1	70

Sample Ordering							
Model	Color Temp.	CRI	Housing				
LRS =	J – MCT –	C90	BN				

FACTORY-INSTALLED OPTIONS:



OPT-EM-LRS-S

Factory-Installed Options:

Blank = No Option For Accessories OPT-EM-LRS-S = EXTERNAL BACK BOX

Other Models:



LRS-J-MCT-C90-BK

WESTGATE

