


Direct-Indirect Metal Housing + PC Lens Troffers




A.

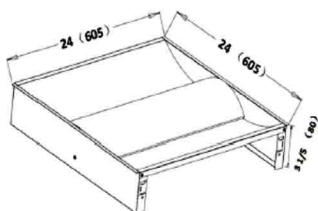

24"(L) x 24"(W) x 3-1/8"(H)



B.

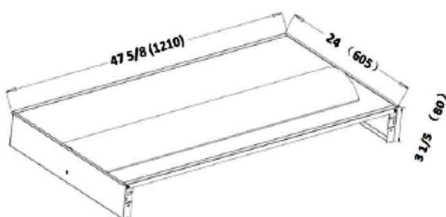

24"(L) x 48"(W) x 3-1/5"(H)

Wattage

40W / 50W

Voltage Input

120-277VAC 50/60Hz

Efficacy

107-110 LM/W


Dimming

0~10V Dimming

Finish

White Finish

Color Temperatures



Features



Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.
LTR-2X2-40W-40K-D	A.	LTR-2X2-40W-40K-D-PERF	A.
LTR-2X4-50W-35K-D	B.	LTR-2X4-50W-35K-D-PERF	B.
LTR-2X4-50W-40K-D	B.	LTR-2X4-50W-40K-D-PERF	B.
LTR-2X4-50W-50K-D	B.	LTR-2X4-50W-50K-D-PERF	B.

Watts	EM Options	Description	Flex Whip	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-TREXT	MOUNTED ON TOP	OPT-FWH-63	6FT 3-WIRE WHIP	N/A	OPT-SEN-2MDR-36	PROGRAMMABLE MICROWAVE B-LEVEL
			OPT-FWH-65	6FT 5-WIRE WHIP	N/A	WEC-3RC	REMOTE CONTROL
			OPT-FWH-66	6FT 6-WIRE WHIP			