


LED Cutoff Wall Pack



A.

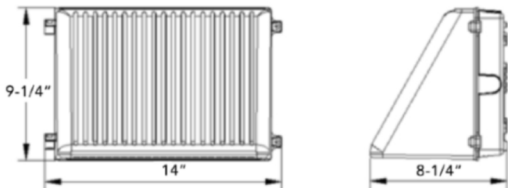

14" (W) x 9 1/4" (H) x 8 1/4" (D)

Wattage

30W / 40W / 50W / 60W / 80W

Voltage Input

120-277VAC 60Hz

Efficacy

130 LPW

Dimming

0-10V Dimming

Finish

Die-Cast Aluminum with Powder Coat Finish
Dark Bronze

Optic Angles

80° x 100°

Color Temperatures

3000K 4000K 5000K

Features



Catalog No.	Fig.
LWPX-30-80W-MCTP	A.
LWPX-50W-30K	A.
LWPX-50W-40K	A.
LWPX-50W-50K	A.



Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
50W	OPT-EM-0D2INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	OPT-SEN-LW460-3MRLV-5	PROGRAMMABLE MICROWAVE (BI-LEVEL)
80W	OPT-EM-0D2INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	WEC-8RC	REMOTE CONTROL
	Vandal Res.	Description	480V Option	Description			
	OPT-EM-0D2INT	TAMPER RESISTANT SCREW	OPT-WP-480V	WAVE CHARGE VOLTAGE			