

RDL-BF

MCT5


4"



6"



AVAILABLE IN BLACK AND OIL RUBBED BRONZE

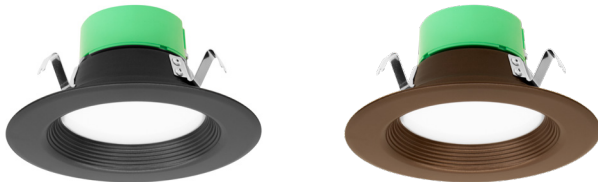

ACCESSORIES INCLUDED




Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight

TECHNICAL SPECIFICATIONS:

- :: Multi CCT (Selectable Switch on the Back of the driver)
- :: Spun Aluminum with White Powder Coat Finish
- :: Smooth Recessed Trim
- :: Optics: White Translucent Acrylic Lens
- :: Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer (refer to website for more information)
- :: CRI: 90+
- :: Power Factor: 90%
- :: Operating temperature: 104°F
- :: Rated life: 50,000 hrs
- :: Suitable for Damp locations
- :: 5-year warranty

APPLICATIONS:

:: LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

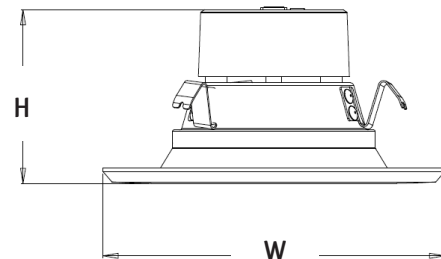

E2

LED DOWN LIGHTS (BAFFLE TRIM)— 4" & 6" ROUND

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSION
RDL4-BF-MCT5	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL4-BF-MCT5-ORB*	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL4-BF-MCT5-BK**	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL6-BF-MCT5	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)
RDL6-BF-MCT5-ORB*	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)
RDL6-BF-MCT5-BK**	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)

* Oil-Rubbed Bronze ** Black