

# SCLL SERIES

COMMERCIAL INDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

SCLL-UD-4FT-60W-35K-D

SCLL-UD-4FT-60W-40K-D

SCLL-UD-4FT-60W-50K-D



LED LINEAR SUSPENDED PERFORATED BASKET LIGHT (UP/DOWN)

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

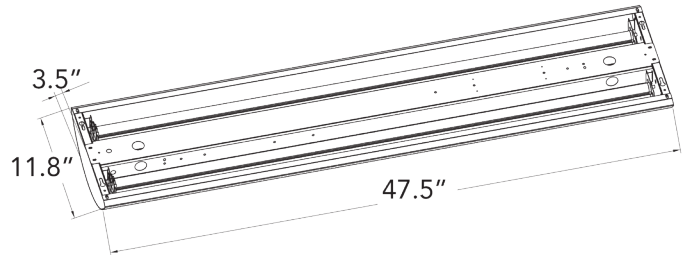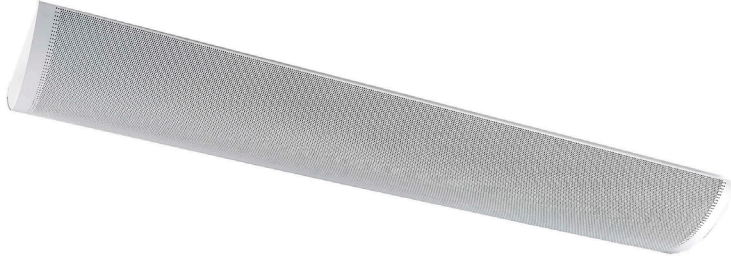

Selection:



47.5" H x 3.5" D x 11.8" W

Ideal for Storage rooms, Offices Conference rooms, Retail Reception areas, Hallways Education facilities

## Features

- Lens: Perforated Basket
- Housing: Anodized Aluminum
- 5-Year Warranty
- Rated Life: 50,000 Hrs

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 40W/20W OR 60W
- Power Factor: >0.95
- Efficacy: 110 LPW
- THD: <20%

### Mechanical:

- Housing: Anodized Aluminum
- Polycarbonate End Caps
- Finish: Powder Coated White
- Ambient Temperature: -22°F to +104°F
- 5-year Warranty

### Lighting:

- Lens: Perforated Basket
- High Quality LED Chips provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- Dimmable: 0~10V Dimmable
- Lumens Range: 6600LM
- Uplight: 40W, Downlight: 20W Or 60W
- Rotatable LED Light Module, can be rotated down (60W down light)
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 50,000 Hrs

### Applications:

- Storage rooms
- Offices
- Conference rooms
- Retail
- Reception Areas
- Hallways
- Education Facilities





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co




WG-ZA-Z7-2Z

## Photometrics: SCLL-UD-4FT-60W



BUG Rating: B1-U5-G1

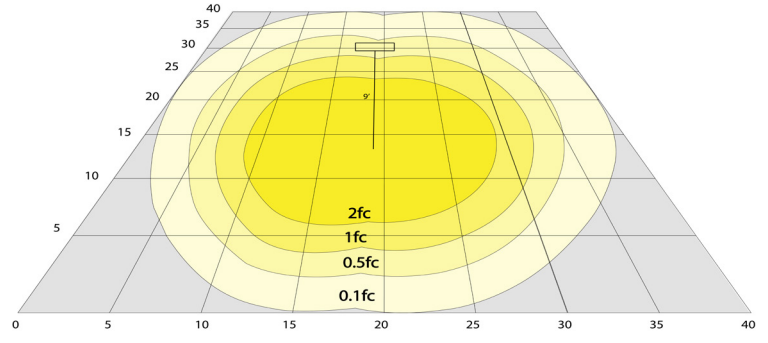


## Other Views:



Lens View



Side View



Front View



Back View

## Performance Table: SCLL-UD-4FT-60W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCLL-UD-4FT-60W-35K-D	60W	120~277V	6600LM	3500K	B1-U5-G1	110
SCLL-UD-4FT-60W-40K-D				4000K		
SCLL-UD-4FT-60W-50K-D				5000K		

## Sample Ordering

Model	Style	Size	Watt	Color Temp.	Dimming					
SCLL	-	UD	-	4FT	-	60W	-		-	D

35K = 3500K  
40K = 4000K  
50K = 5000K

### Accessory:

Blank = No Option For Accessories  
SCLL-CB = COUPLING BRACKET

### Factory-Installed Options:

Blank = No Option For Accessories  
OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY  
OPT-SCL-LMT-35K = ADDITIONAL LED MODULAR TUBE, 20W, 3500K  
OPT-SCL-LMT-40K = ADDITIONAL LED MODULAR TUBE, 20W, 4000K  
OPT-SCL-LMT-50K = ADDITIONAL LED MODULAR TUBE, 20W, 5000K  
OPT-CLR-100 = COLOR PAINT  
WEC-3RC = REMOTE CONTROL  
OPT-SEN-2US = ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED)

### ACCESSORY:



SCLL-CB

### FACTORY-INSTALLED OPTIONS:



OPT-EM-SL1INT



OPT-SEN-2US



WEC-3RC

### Example:

- SCLL-UD-4FT-60W-50K-D
- SCLL-UD-4FT-60W-50K-D  
OPT-EM-SL1INT

(FOR SCLL 60W 5000K FIXTURE 120-277V)

(FOR SCLL 60W 5000K FIXTURE 120-277V)  
(EMERGENCY BACKUP INTERNAL BATTERY)

