



LED Parabolic Suspended Down Light




A.

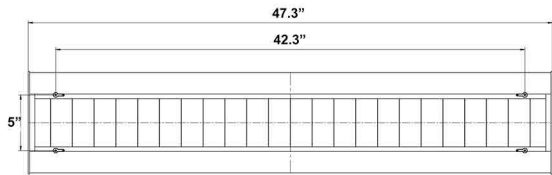

5" H x 2 1/2" D x 47.3" W



B.



5" H x 2 1/2" D x 47.3" W

Wattage

40W

Voltage Input

120-277V AC 60Hz

Efficacy

115 LPW


Dimming

0~10V Dimming

Finish

Anodized Aluminum
Powder Coated White Finish

Color Temperatures



Features



Accessory



SCLP-UD-CB
Coupling Bracket

Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.
SCLP-4FT-40W-50K-D	A.	SCLT-4FT-40W-40K-D	B.
SCLP-4FT-40W-35K-D	A.	SCLT-4FT-40W-35K-D	B.
SCLP-4FT-40W-MCT-D	A.	SCLT-4FT-40W-MCT-D	B.
SCLT-4FT-40W-50K-D	B.		

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-AC2EXT	EXTERNAL	OPT-SLCP-ULK	UP LIGHT 20W, MCT	N/A	N/A	N/A