



Smooth Baffle LED Square Trim Lights

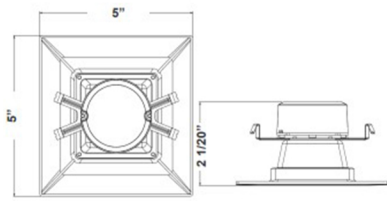

5" x 2 1/2"

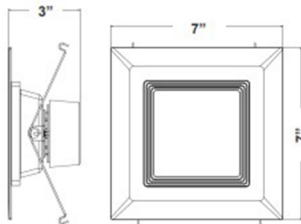

7" x 3"

Wattage

10W / 15W

Voltage Input

120V AC

Efficacy

66-82 LPW


Dimming

TRIAC Dimming

Finish

Spun Aluminum
White Finish

Color Temperatures

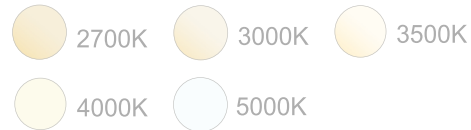

Features



| Catalog No. | Fig. | Catalog No. | Fig. |
|-------------|------|--------------|------|
| SDL4-MCT5 | A. | SDL4-BF-MCT5 | A. |
| SDL6-MCT5 | B. | SDL6-BF-27K | B. |
| SDL4-BF-27K | A. | SDL6-BF-30K | B. |
| SDL4-BF-30K | A. | SDL6-BF-41K | B. |
| SDL4-BF-41K | A. | SDL6-BF-50K | B. |
| SDL4-BF-50K | A. | SDL6-BF-MCT5 | B. |

Factory-Installed Options

| Watts | 277V Option | Description | Photocell | Description | Paint | Sensor | Description |
|-----------|---------------|-------------|-----------|-------------|-------|--------|-------------|
| UP TO 19W | OPT-EM-DL1EXT | EXTERNAL | N/A | N/A | N/A | N/A | N/A |