


LED Suspended Up/Down Clear Round Panel Light



A.

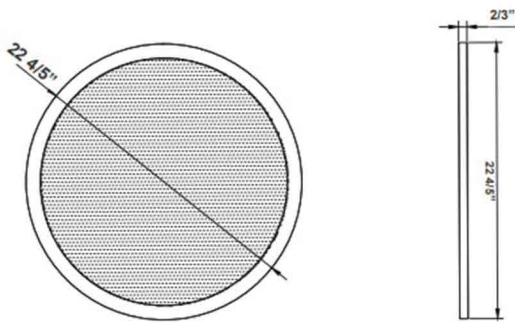

22 4/5"(D) x 22 4/5"(H) x 2/3"(W)
Canopy Dimensions: 8" X 1-3/4"

Wattage

40W

Voltage Input

120-277V AC 50/60Hz

Efficacy

105 LPW


Dimming

0~10V Dimmable

Finish

Aluminum Housing
Sandy White Finish

Color Temperatures



Features



Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-CM1INT	INTERNAL	N/A	N/A	N/A	OPT-SEN-2MDR-36 WEC-3RC	PROGRAMMABLE MICROWAVE BI-LEVEL REMOTE CONTROL

Catalog No.	Fig.
SRPL-40W-35K-D	A.
SRPL-40W-40K-D	A.
SRPL-40W-50K-D	A.
SRPL-40W-MCT-D	A.